
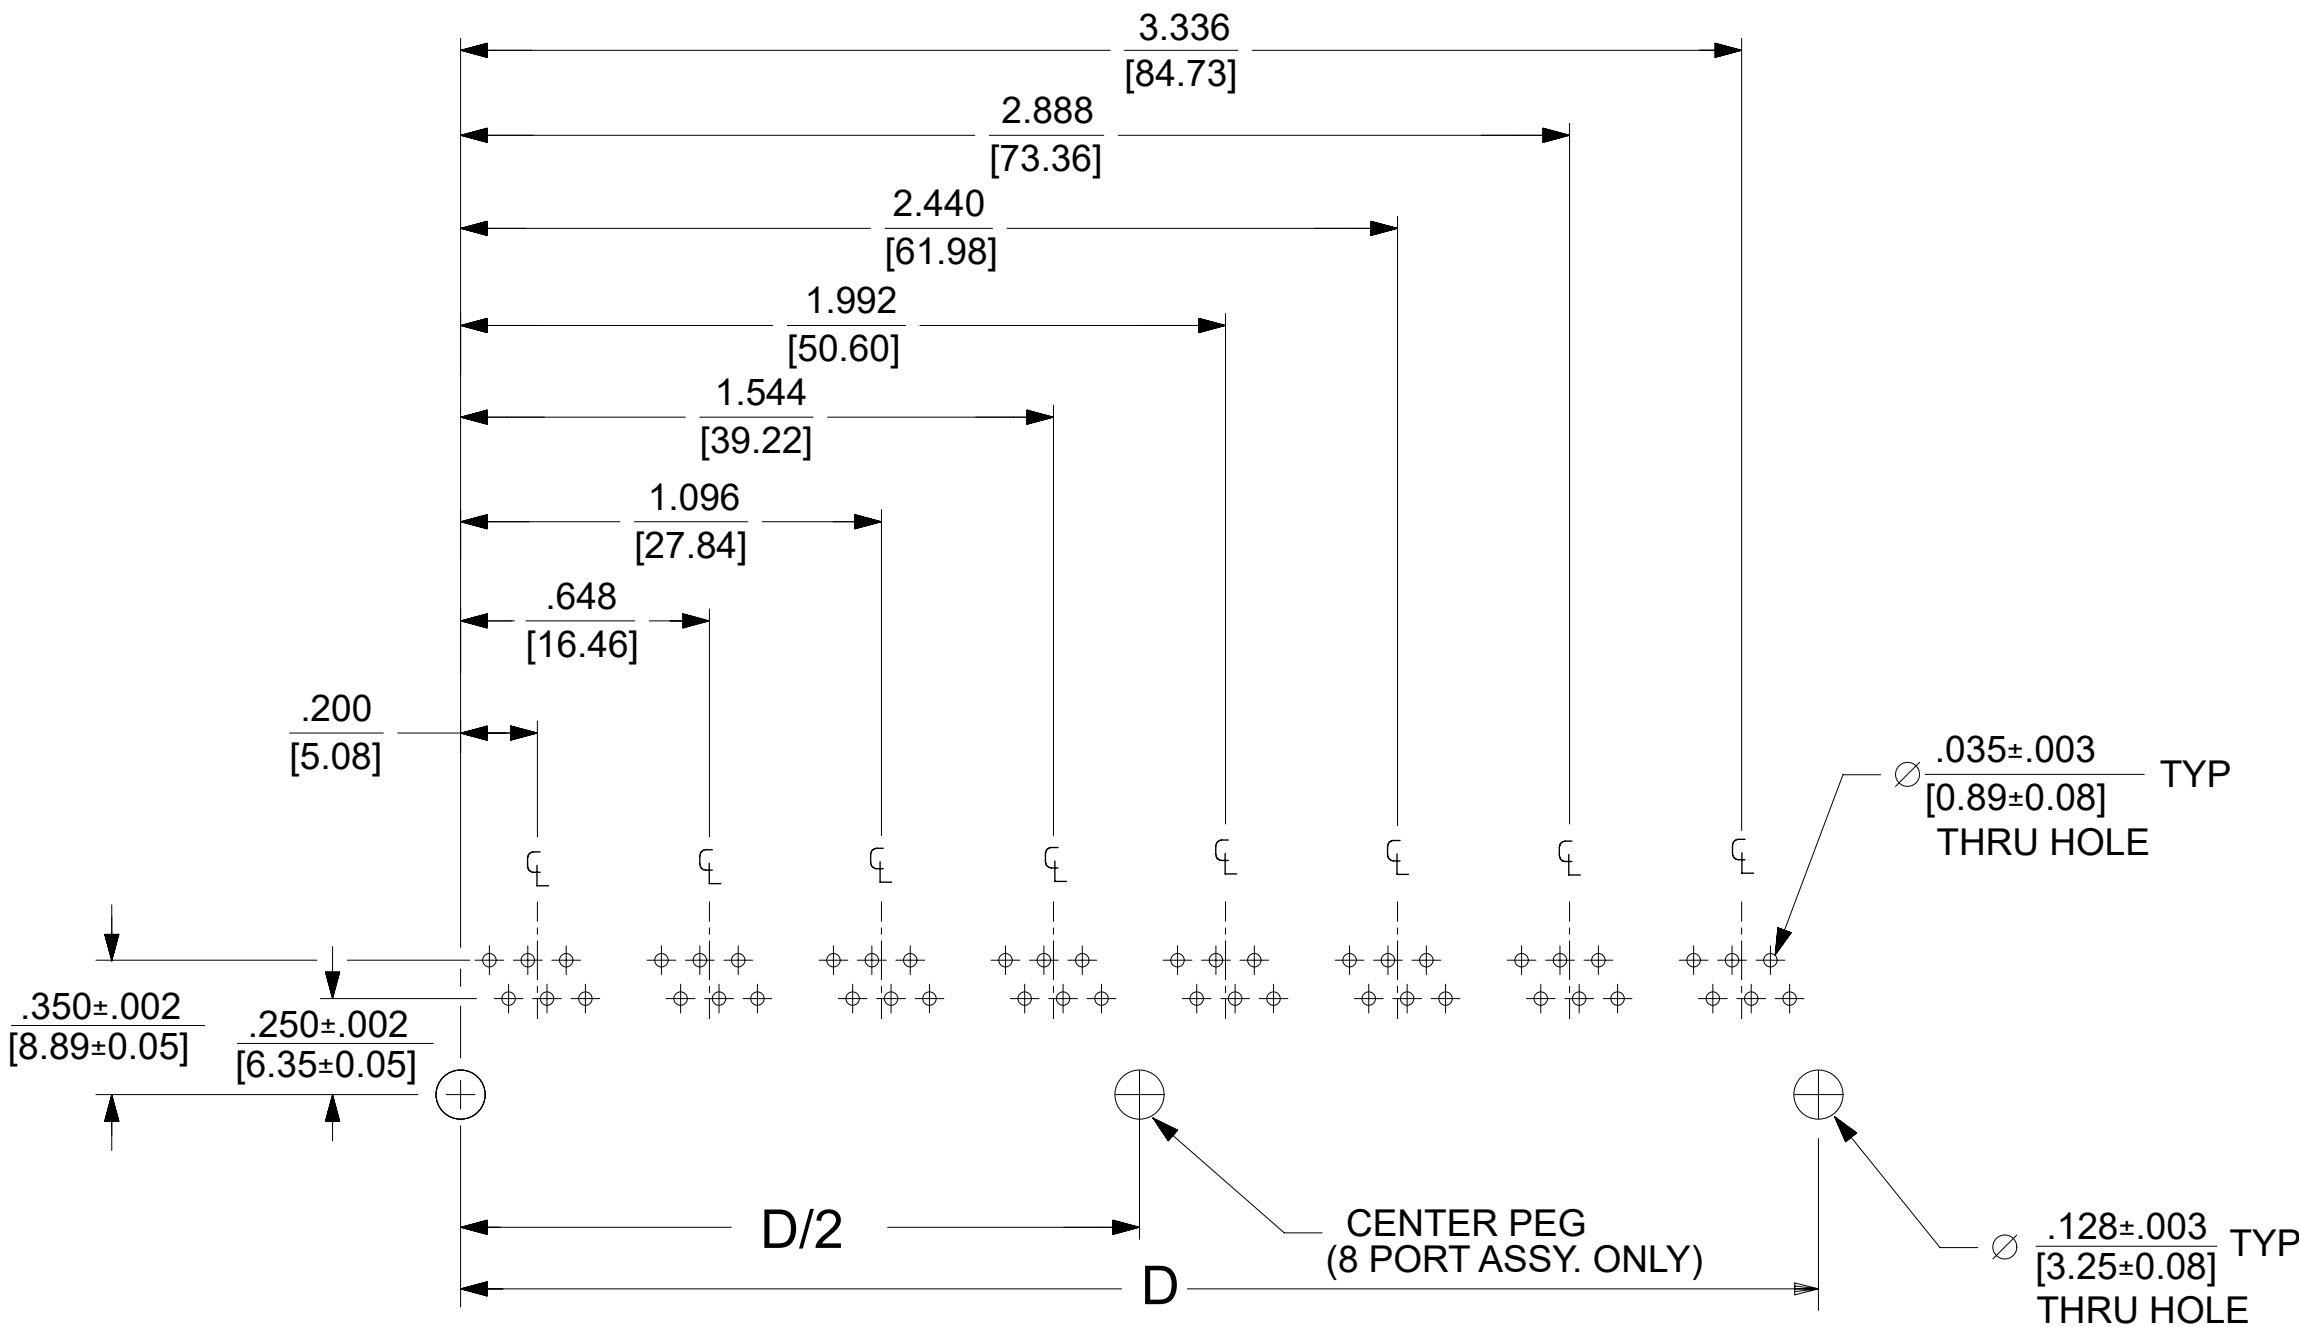
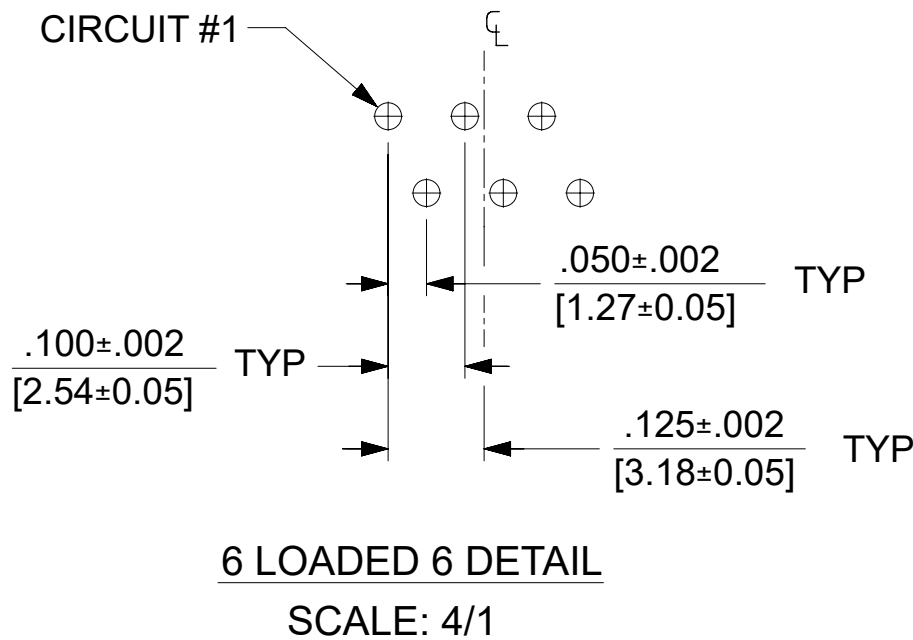
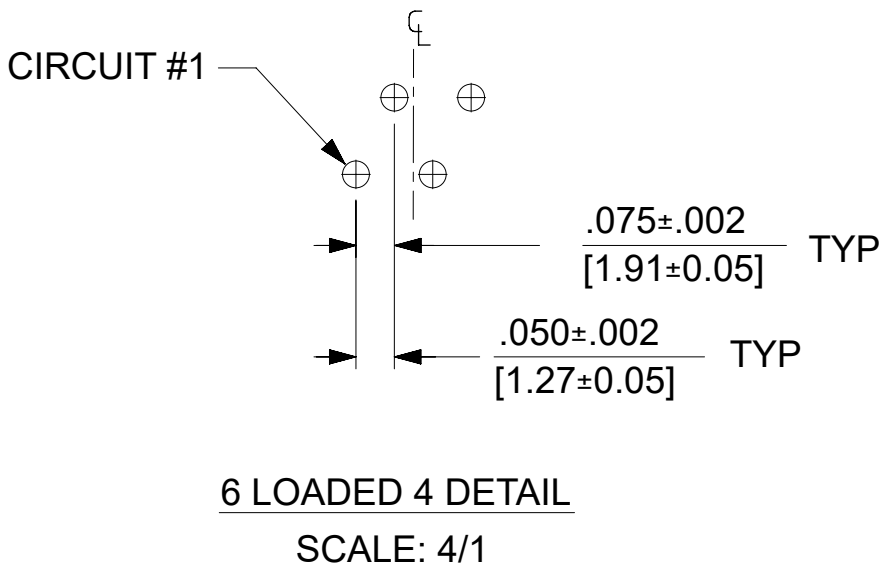


FLANGELESS (SHIELDED)							
ASSEMBLY NUMBER	DIMENSION "B"	CONNECTOR SIZE	NUMBER OF CIRCUITS	NUMBER OF PORTS	NUMBER OF REAR SHIELD GROUND TABS	PACKAGING STYLE	PACKAGING SPECIFICATION
43223-8128	.180	8	8	2	1	TRAY	PK-44150-004
43223-8146	.180	8	8	4	3	↑	↑
43223-8164	.180	8	8	6	5	↑	↑
43223-8182	.180	8	8	8	7	↑	↑
43223-8185	.180	8	8	8	1	↓	↓
43223-8194	.180	8	2	8	7	TRAY	PK-44150-004
43223-8307	.145	8	2	8	7	TRAY	PK-44150-004

FLANGELESS (UNSHIELDED)					
ASSEMBLY NUMBER	CONNECTOR SIZE	NUMBER OF CIRCUITS	NUMBER OF PORTS	PACKAGING STYLE	PACKAGING SPECIFICATION
43223-6101	6	6	2	TRAY	PK-43249-004
43223-6107	6	6	4	↑	↑
43223-6113	6	6	6		
43223-6122	6	4	2		
43223-6128	6	4	4		
43223-6140	6	4	8		
43223-6155	6	2	6	↓	↓
43223-6158	6	2	8	TRAY	PK-43249-004
43223-8122	8	8	2	TRAY	PK-43249-004
43223-8140	8	8	4	↑	↑
43223-8158	8	8	6	↓	↓
43223-8176	8	8	8	TRAY	PK-43249-004

SNAP FIT PEG VERSIONS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBER AS PER PCN#509457.				molex								
IN/MM		2:1														
GENERAL TOLERANCES (UNLESS SPECIFIED)								LOW PROFILE GANGED, RIGHT ANGLE MODULAR JACK ASSEMBLY								
													MM		INCH	
4 PLACES		±		EC NO: 680890 DRWN: SANTHN2021/06/18 CHK'D: GGA2021/11/25 APPR: GGA2021/11/25									PRODUCT CUSTOMER DRAWING			
3 PLACES		±	± 0.015													
2 PLACES		± 0.38	±					INITIAL REVISION: DRWN: JTR1993/10/18 APPR: RAS1993/10/18				DOCUMENT NUMBER SDA-43223		DOC TYPE PSD	DOC PART 001	REVISION L
1 PLACE		±	±													
0 PLACES		±	±													
ANGULAR TOL				± 0.5 °												
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION 		DRAWING C-SIZE		SERIES 43223		MATERIAL NUMBER SEE SHT 3		CUSTOMER GENERAL MARKET		SHEET NUMBER 3 OF 6		

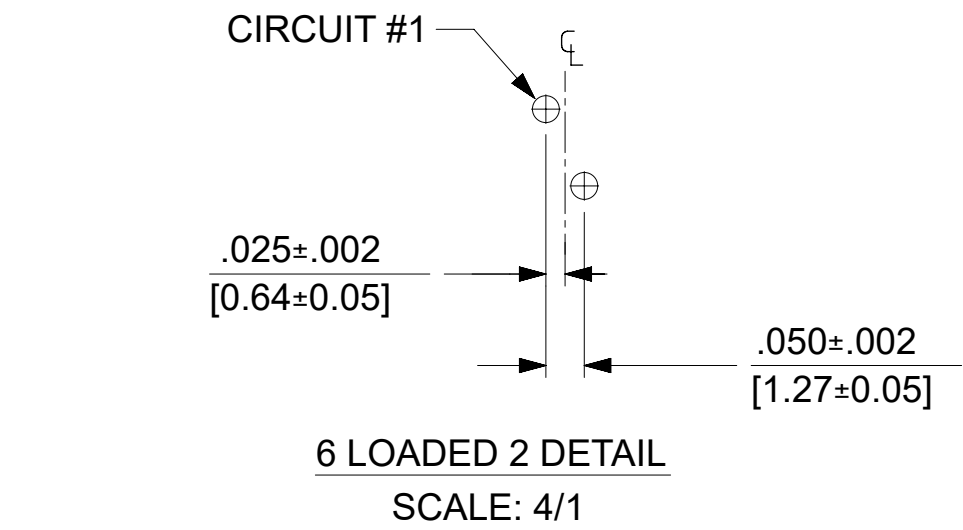

SUGGESTED P.C. BOARD LAYOUT
COMPONENT SIDE OF BOARD
8 PORT, 6 LOADED 6, LAYOUT SHOWN
(SNAP-FIT VERSIONS)

NOTES:
1. RECOMMENDED PCB THICKNESS: .062±.005/(1.57±0.13)

NUMBER OF PORTS		DIM. D											
2		.848 (21.54)											
3		1.296 (32.92)											
4		1.744 (44.30)											
5		2.192 (55.68)											
6		2.640 (67.06)											
8		3.536 (89.81)											
DOCUMENT STATUS		P1	RELEASE DATE	2021/11/25	12:19:21								

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBER AS PER PCN#509457.				molex LOW PROFILE GANGED, RIGHT ANGLE MODULAR JACK ASSEMBLY							
IN/MM		2:1													
GENERAL TOLERANCES (UNLESS SPECIFIED)															
		MM	INCH	EC NO: 680890 DRWN: SANTHN 2021/06/18 CHK'D: GGA 2021/11/25 APPR: GGA 2021/11/25				PRODUCT CUSTOMER DRAWING							
4 PLACES	±		±												
3 PLACES	±		± 0.015												
2 PLACES	±	0.38	±												
1 PLACE	±		±												
0 PLACES	±		±	INITIAL REVISION:				DOCUMENT NUMBER							
ANGULAR TOL ± 0.5 °				DRWN: JTR 1993/10/18				SDA-43223							
				APPR: RAS 1993/10/18				DOC TYPE							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						C-SIZE		43223		SEE SHT 3		GENERAL MARKET		4 OF 6	

