
AVB Audio Endpoint

Highlights

- Supports the implementation of an Automotive Ethernet Audio Device (AED-A) to transmit and/or receive uncompressed audio over an Ethernet Audio Video Bridging (AVB) network

Target Applications

- Automotive in-vehicle networking
- Infotainment
- Telematics

Features

- generalized Precision Time Protocol (gPTP)
 - Grandmaster
 - Slave
 - Precise time synchronization
 - 1PPS measurement support
- Audio Video Transport Protocol (AVTP)
 - AVTP Audio Format (AAF) Listener or Talker
 - AVTP Clock Reference Format (CRF) Listener or Talker
- Real-time Transport Protocol (RTP)
 - Extended with AVB RTCP support
 - Configurable Payload Type ID for fitting to custom RTP profile specifications
- Stream routing
 - Up to 8 streams in parallel
 - Processing of up to 40 audio channels
 - Parallel processing of incoming and outgoing streams
 - PDM to PCM decimation
- Media Clock recovery, from an:
 - AVTP AAF stream
 - AVTP CRF stream
 - RTP stream
- Media Clock generation, based on:
 - Local crystal
 - External FSY signal
- Configuration
 - Avnu entity model based
 - Tool assisted by MPLAB® Network Creator

- Bootloader
 - Remote firmware update over Ethernet and Universal Serial Bus (USB)
 - Remote configuration update over Ethernet and USB
- External MCU connectivity
 - MCU connected as Layer 2 device
 - Ethernet frame pass through on Serial Peripheral Interface (SPI) and USB
- Secure element (optional)
 - High-bandwidth Digital Content Protection (HDCP) receiver
 - Secure boot
 - Secure update
- Ethernet MAC 10/100 Mbps in Reduced Media Independent Interface (RMII) mode
- Two I²C Ports
 - PLL and TA100 control
 - User-specific external modules
- SPI Port
- USB Port
- Two Audio Ports supporting:
 - Inter-IC Sound (I²S)
 - Time-Division Multiplexing (TDM)
 - Pulse-Density Modulation (PDM)
- System
 - Embedded voltage regulator for single-supply operation
 - Power-on-Reset (POR), Brown-out Detector (BOD)
 - AEC-Q100 Grade 2 qualified
- Package
 - 100-ball TFBGA, 9x9 mm, pitch 0.8 mm

Conformity

- Automotive Ethernet AVB Functional and Interoperability Specification
- IEEE 1722™-2016 (AVTP)
- RFC 3550-2003 (RTP/RTP Control Protocol (RTCP))
- IEEE 1733™-2011 (AVB RTCP packet extension)
- IEEE 802.1AS™-2011 (gPTP)

TO OUR VALUED CUSTOMERS

It is our intention to provide our valued customers with the best documentation possible to ensure successful use of your Microchip products. To this end, we will continue to improve our publications to better suit your needs. Our publications will be refined and enhanced as new volumes and updates are introduced.

If you have any questions or comments regarding this publication, please contact the Marketing Communications Department via E-mail at docerrors@microchip.com. We welcome your feedback.

Most Current Data Sheet

To obtain the most up-to-date version of this data sheet, please register at our Worldwide Web site at:

<http://www.microchip.com>

You can determine the version of a data sheet by examining its literature number found on the bottom outside corner of any page. The last character of the literature number is the version number, (e.g., DS30000000A is version A of document DS30000000).

Errata

An errata sheet, describing minor operational differences from the data sheet and recommended workarounds, may exist for current devices. As device/documentation issues become known to us, we will publish an errata sheet. The errata will specify the revision of silicon and revision of document to which it applies.

To determine if an errata sheet exists for a particular device, please check with one of the following:

- Microchip's Worldwide Web site: <http://www.microchip.com>
- Your local Microchip sales office (see last page)

When contacting a sales office, please specify which device, revision of silicon and data sheet (include literature number) you are using.

Customer Notification System

Register on our web site at www.microchip.com to receive the most current information on all of our products.


1.0 INTRODUCTION

The LAN9360 supports the implementation of an Automotive Ethernet Audio Device enabling uncompressed audio data transfers over an Ethernet Audio Video Bridging network. It is designed to route audio data between an AVB/TSN Media Stream on the Ethernet network and an Audio Interface that connects to digital audio sources and sinks.

The LAN9360 provides an Ethernet Interface. By connection to an external Ethernet PHY Transceiver, it can be used with several Ethernet physical layers.

Figure 1-1 depicts the block diagram of the LAN9360.

FIGURE 1-1: LAN9360 BLOCK DIAGRAM

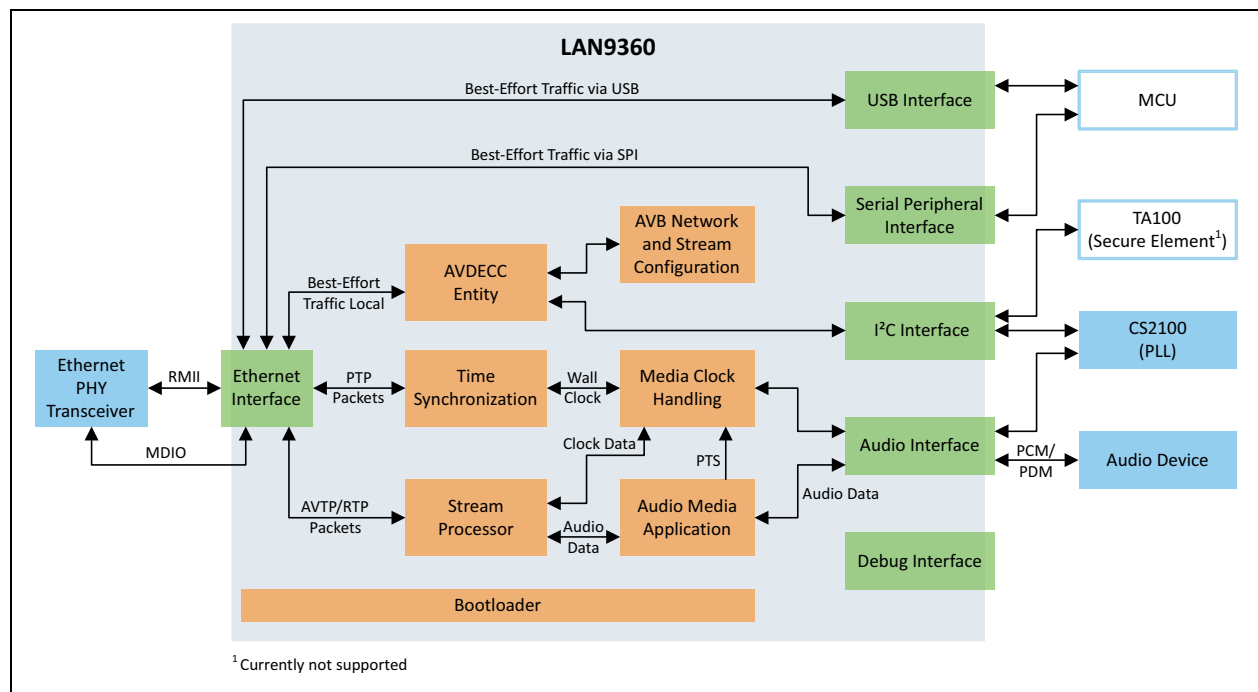

As outlined in Figure 1-1, the LAN9360 consists of functional blocks. Each functional block contains one or multiple components that provide specific functionality.

1.1 LAN9360 Functional Blocks

The LAN9360 functional blocks are described in the LAN9360 data sheet.

Functional blocks, which interfere with external devices via physical pins are called interfaces.

1.2 External Devices

Ethernet PHY Transceiver

100BASE-T1 or 100BASE-TX may be selected by configuration. 10BASE-T1S is supported for evaluation.

PLL

The LAN9360 requires an external PLL of type CS2100 to generate the Bit-Clock for the Audio Interface.

LAN9360

Audio Device

An external audio device, e.g., a DSP or a CODEC, is connected to the Audio Interface to transfer digital audio data. It is used as sink and/or source of Pulse-Code Modulation/Pulse-Density Modulation (PCM/PDM) coded audio data.

The Codec WM8904 is supported with volume control.

Secure Element (Optional)

A TA100 is used for HDCP, secure boot and secure update.

MCU (Optional)


An external MCU may be connected to the USB Interface or SPI to send and receive Ethernet frames.

2.0 PACKAGE AND PINOUT

2.1 100-Ball TFBGA Package Outline

100-Ball Ceramic Ball Grid Array Package (CQB) - 9x9 mm Body [TFBGA] Atmel Legacy Global Package Code CPR


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

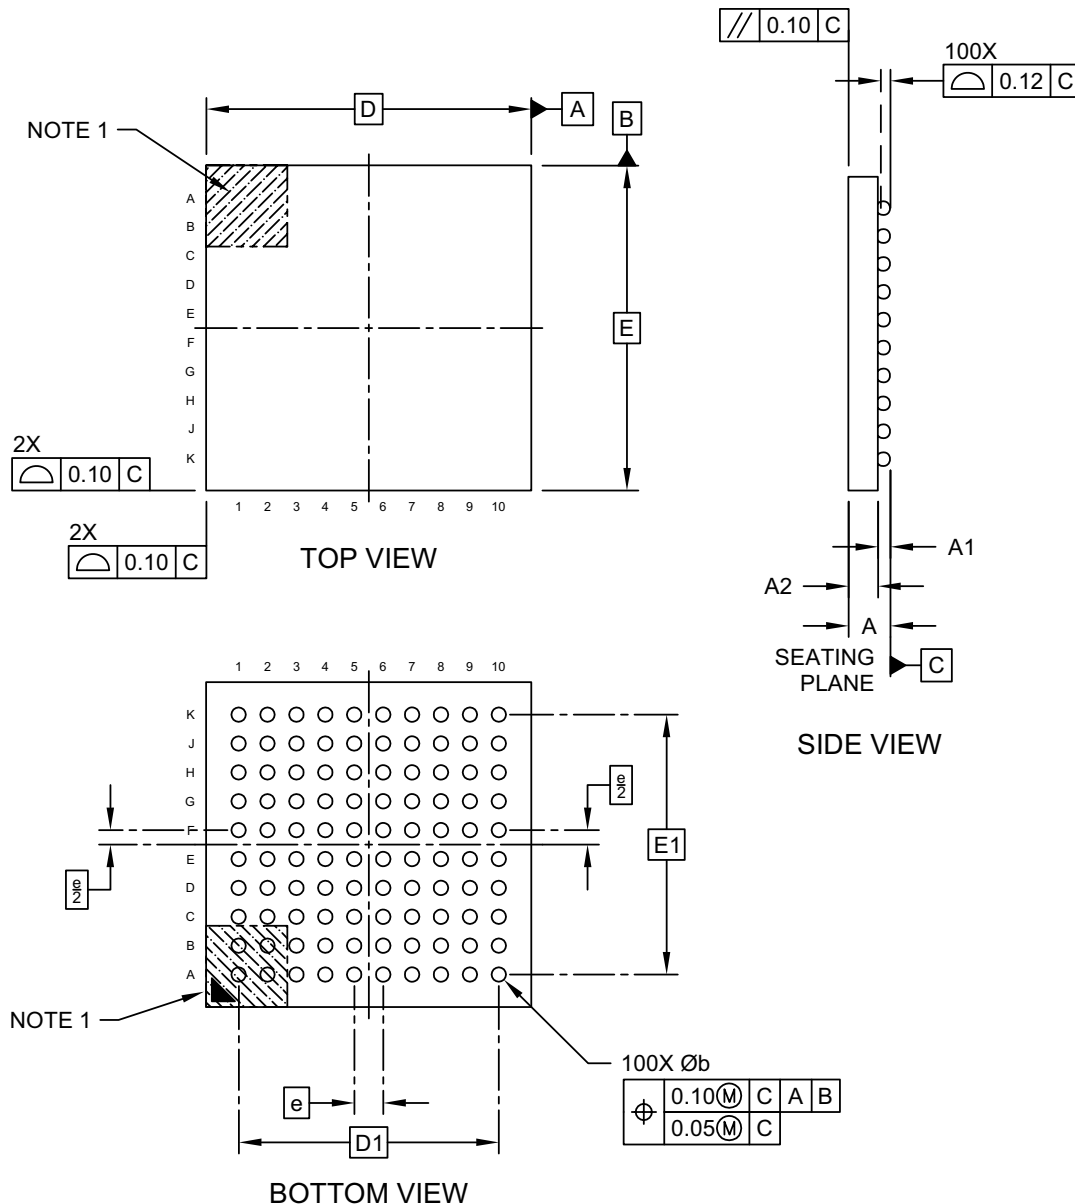

Microchip Technology Drawing C04-21503-CQB Rev B Sheet 1 of 2

100-Ball Ceramic Ball Grid Array Package (CQB) - 9x9 mm Body [TFBGA] Atmel Legacy Global Package Code CPR

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

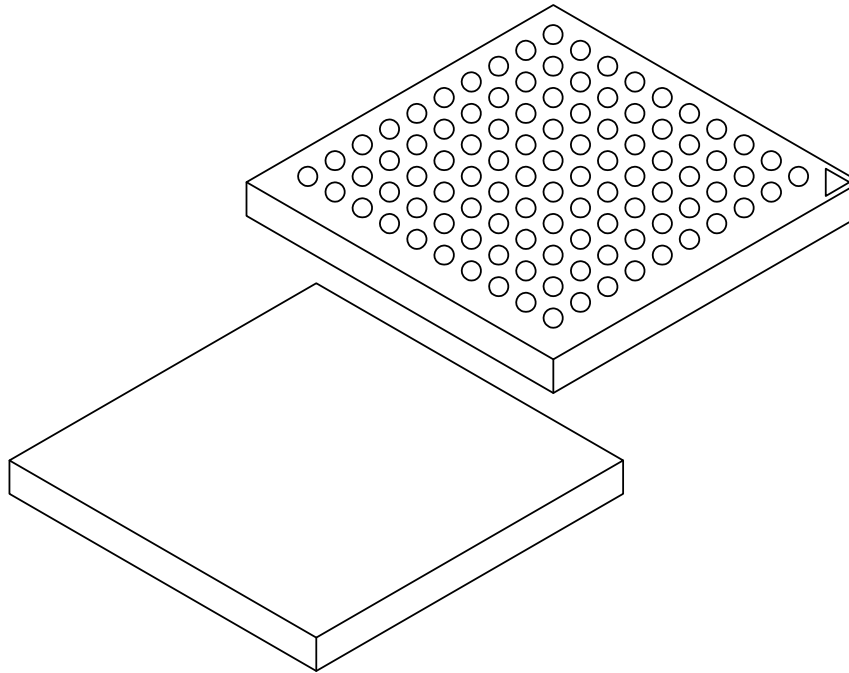

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	100		
Pitch	e	0.80 BSC		
Overall Height	A	1.10	-	1.20
Ball Height	A1	0.20	-	-
Molded Package Height	A2	0.65	-	-
Overall Length	D	9.00 BSC		
Overall Pitch	D1	7.20 BSC		
Overall Width	E	9.00 BSC		
Overall Pitch	E1	7.20 BSC		
Terminal Diameter	b	0.40	0.45	0.50


Notes:

1. Terminal A1 visual index feature may vary, but must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-21503-CQB Rev B Sheet 2 of 2

100-Ball Ceramic Ball Grid Array Package (CQB) - 9x9 mm Body [TFBGA] Atmel Legacy Global Package Code CPR

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

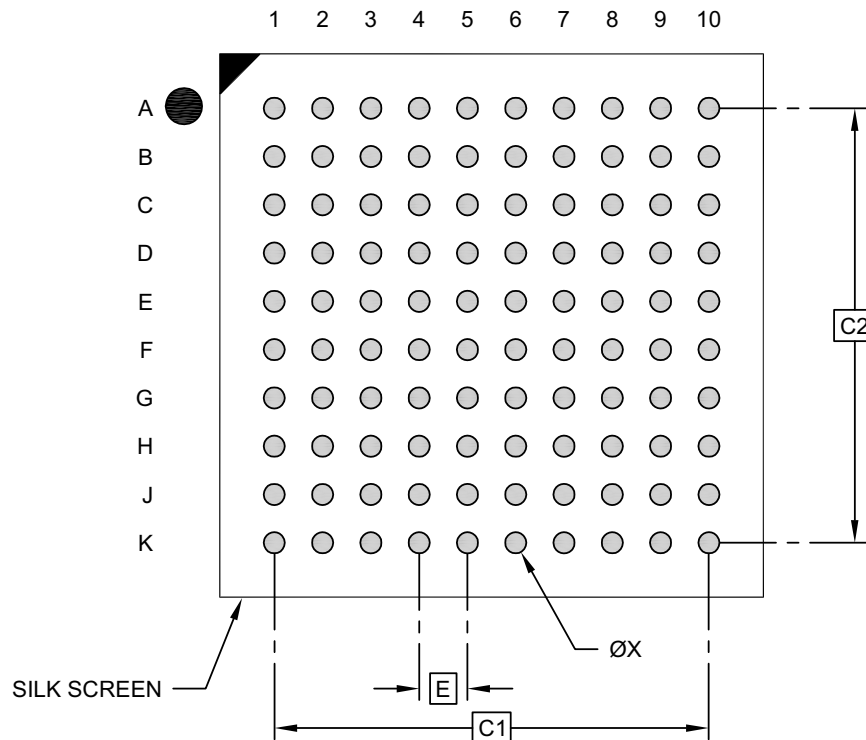

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Overall Pitch	C1	7.20 BSC		
Contact Pad Spacing	C2	7.20 BSC		
Contact Pad Diameter (X100)	X1			0.35

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23503-CQB Rev B

LAN9360

2.2 100-Lead Package Pinout

TABLE 2-1: 100-LEAD PACKAGE PINOUT

TFBGA Ball	Signal	Conditions/ I/O Type	Pin Description	Type	Reset State ¹	Note
Audio Interface Audio Port						
E2	SCKA	GPIO	Serial Clock	Input/Output	I, PU, ST	—
E1	FSYA		Word Select			
G4	RF	GPIO_AD	FSYA Receive	Input		
K9	SRA		Serial Data Input			
G3	SXA	GPIO	Serial Data Output	Output		
C10	SCKB	GPIO_AD	Serial Clock	Input/Output		
J6	FSYB		Word Select			
J5	SRB		Serial Data Input	Input		
C7	SXB	GPIO	Serial Data Output	Output		
Audio Interface Clock Port						
F8	REFCLK0	GPIO	Reference Clock 0	Output	I, PD, ST	Signal is used to drive the clock reference of the external PLL for the audio clock.
			1PPS Measurement Signal			1PPS method for clock accuracy measurement
	ERASE		—	Input		—
K8	REFCLK1	GPIO_AD	Reference Clock 1	Output	I, PU, ST	—
G2	MCLK		Master Clock			
J1	PLLDIVSEL		PLL Divider Select			
H8	REFCLKIN		Reference Clock 0 Input	Input		
J3	PLLIN/RK		Reference Clock Input			
A9	EVIN		GPIO	Event Input for Time-stamping		
H7	UNLOCK	GPIO_AD	Media Clock Unlock	Output	Signals synchronization failures at startup and during runtime	
Serial Peripheral Interface						
H1	$\overline{\text{PCS}}$	GPIO	Peripheral Chip Select	Master: Output, Slave: Input	I, PU, ST	—
K3	MISO		Master In Slave Out	Master: Input, Slave: Output		
H5	MOSI	GPIO_AD	Master Out Slave In	Master: Output, Slave: Input		
J4	SPCK		Serial Clock			
G1	IRQ		Interrupt Request	Output		
K1	FC		Flow Control			

TABLE 2-1: 100-LEAD PACKAGE PINOUT (CONTINUED)

TFBGA Ball	Signal	Conditions/ I/O Type	Pin Description	Type	Reset State ¹	Note	
Crystal 12 MHz							
A2	XOUT	CLOCK	—	Output	HiZ	—	
A1	XIN			Input			
Ethernet Interface							
C1	GTCK	GPIO_AD	Transmit Clock	Input	I, PU, ST	Input only. GTCK must be provided with a 50 MHz external oscillator.	
D2	GTEN	GPIO	Transmit Enable	Output		—	
E3	GTX0		Transmit Data				
B5	GTX1						
A5	GRXDV	GPIO_CLK	Receive Data Valid	Input			
D5	GRX0		Receive Data				
B6	GRX1						
A6	GRXER		Receive Error				
B7	GMDC		Management Data Clock	Output			
B8	GMDIO		Management Data Input/Output	Input/Output			
F1	GINT	GPIO_AD	LAN interrupt	Input			From LAN PHY
J8	GRST		LAN reset	Output			To LAN PHY
I ² C Interface							
H4	SDA0	GPIO_AD	Serial Data	Input/Output	I, PU, ST	Interface to host	
J7	SCK0		Serial Clock	Output			
F9	SDA1	GPIO_AD	Serial Data	Input/Output		Interface to connect a PLL and an optional Secure Element	
H10	SCK1	GPIO	Serial Clock	Output			
H6	TA100RST	GPIO_CLK	TA100 reset			—	
USB Interface							
A4	DM	USBHS	USB High Speed Data	Input/Output	—	—	
B4	DP						
A3	VBG	VBG	Bias Voltage Reference for USB	Input			I, PU, ST
F2	VBUS	GPIO_AD	USB Signal				
Debug Interface							
C8	SWO	GPIO	Serial Wire Output	Output	O, PU	—	
G8	SWDIO		Serial Wire Debug Input/Output	Input	I, ST		
E9	SWCLK	GPIO	Serial Wire Debug Clock	Input			

LAN9360

TABLE 2-1: 100-LEAD PACKAGE PINOUT (CONTINUED)

TFBGA Ball	Signal	Conditions/ I/O Type	Pin Description	Type	Reset State ¹	Note
Miscellaneous						
G10	RST	RST	—	Input	I, PU	—
K5	IDENTIFY	GPIO_AD	Toggles if the device identification feature is used	Output	I, PU, ST	—
G5	CFG		When detected to be high at reset, the configuration image 0 is loaded. Otherwise, image 1 is loaded.	Input		
Power and Ground						
C5, F3, G7	VDDIO	POWER	Power	—	—	—
C6, D6, G6	VDDCORE					
D7	VDDPLL					
E5	VDDUTMII					
B3	VDDUTMIC					
E6	VDDPLLUSB					
C3	VDDOUT					
C2	VDDIN					
D1	VREFP					
D3	VREFN	GROUND	Ground			
A8, C4, D4, E4, E7, F4, F5, F6	GND					

TABLE 2-1: 100-LEAD PACKAGE PINOUT (CONTINUED)

TFBGA Ball	Signal	Conditions/ I/O Type	Pin Description	Type	Reset State ¹	Note
Not Connected						
A7	Not connected	—	—	—	I, PU, ST	—
A10					I, PD	
B1, B2, B10					I, PU, ST	
B9					I, PD, ST	
C9					I, PU, ST	
D8, D9, D10						
E8, E10						
F7					I, PD	
F10					I, PU, ST	
G9						
H2, H3, H9						
J2					HiZ	
J9, J10					I, PU, ST	
K2					HiZ	
K4, K6, K7, K10					I, PU, ST	

Note 1: In reset state the following applies:

- “I” indicates a pin configured as input.
- “O” indicates a pin configured as output.
- “PU” indicates a pin with internal pull-up resistor.
- “PD” indicates a pin with internal pull-down resistor.
- “ST” indicates if Schmitt Trigger is enabled.
- “HiZ” indicates high impedance state.

PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

PART NO.	X	-	X	/	XX	[X] ⁽¹⁾	-	XXX	-	[XXX]																																																																													
Device Family	Device Variant		Operating Temperature Range		Package Type	Tape and Reel Option		Revision Code		Automotive Code Option																																																																													
<table><tr><td>Device Family:</td><td colspan="10">LAN9360</td></tr><tr><td>Device Variant:</td><td colspan="10">A or C = Basis feature set</td></tr><tr><td>Operating Temperature Range:</td><td colspan="10">V = -40°C to +105°C (AEC-Q100 Grade 2) I = -40°C to +85°C (Industrial)</td></tr><tr><td>Package Type:</td><td colspan="10">CQB = TFBGA (100-ball)</td></tr><tr><td>Tape and Reel Option:</td><td colspan="10">Blank = Standard packaging (tray)⁽²⁾ T = Tape and Reel⁽¹⁾</td></tr><tr><td>Revision Code:</td><td colspan="10">XXX = Unique 3-digit number</td></tr><tr><td>Automotive Code Option:</td><td colspan="10">Blank = Industrial grade VXX = Automotive grade</td></tr></table>											Device Family:	LAN9360										Device Variant:	A or C = Basis feature set										Operating Temperature Range:	V = -40°C to +105°C (AEC-Q100 Grade 2) I = -40°C to +85°C (Industrial)										Package Type:	CQB = TFBGA (100-ball)										Tape and Reel Option:	Blank = Standard packaging (tray) ⁽²⁾ T = Tape and Reel ⁽¹⁾										Revision Code:	XXX = Unique 3-digit number										Automotive Code Option:	Blank = Industrial grade VXX = Automotive grade									
Device Family:	LAN9360																																																																																						
Device Variant:	A or C = Basis feature set																																																																																						
Operating Temperature Range:	V = -40°C to +105°C (AEC-Q100 Grade 2) I = -40°C to +85°C (Industrial)																																																																																						
Package Type:	CQB = TFBGA (100-ball)																																																																																						
Tape and Reel Option:	Blank = Standard packaging (tray) ⁽²⁾ T = Tape and Reel ⁽¹⁾																																																																																						
Revision Code:	XXX = Unique 3-digit number																																																																																						
Automotive Code Option:	Blank = Industrial grade VXX = Automotive grade																																																																																						

Examples:

a) LAN9360A-V/CQBT-100-VAO,
Basis feature set,
-40°C to +105°C,
TFBGA (100 ball),
Tape and Reel,
Revision code 100,
Automotive grade

b) LAN9360A-I/CQB-101,
Basis feature set,
-40°C to +85°C,
TFBGA (100 ball),
Tray,
Revision code 101,
Industrial grade

Note 1: Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.
Reel size is 2,000.

2: Tray size is 260.

APPENDIX A: REVISION HISTORY

Revision	Date	Comment
DS60001577E	Feb. 2022	- General: - Added USB Port related information - Removed EEPROM related contents - Section 1.0: - Reworked Figure 1-1 - Added WM8904 CODEC information - Section 2.2: Reworked Table 2-1, added Reset State information - Product Identification System: reworked section
DS60001577D	Jan. 2021	Initial release of this document
DS60001577C	July 2020	Updated draft document. For details refer to the respective document revision.
DS60001577B	Nov. 2019	
DS60001577A	July 2019	Initial version of draft document

LAN9360

NOTES:

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
 - Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
 - Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
 - Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is “unbreakable”. Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.
-

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at <https://www.microchip.com/en-us/support/design-help/client-support-services>.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maxStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, TrueTime, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, GridTime, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, NVM Express, NVMe, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PiCtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQI, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, Symmcom, and Trusted Time are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2019-2022, Microchip Technology Incorporated and its subsidiaries.

All Rights Reserved.

ISBN: 978-1-5224-9608-3

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

Raleigh, NC
Tel: 919-844-7510

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110
Tel: 408-436-4270

Canada - Toronto
Tel: 905-695-1980
Fax: 905-695-2078

ASIA/PACIFIC

Australia - Sydney
Tel: 61-2-9868-6733

China - Beijing
Tel: 86-10-8569-7000

China - Chengdu
Tel: 86-28-8665-5511

China - Chongqing
Tel: 86-23-8980-9588

China - Dongguan
Tel: 86-769-8702-9880

China - Guangzhou
Tel: 86-20-8755-8029

China - Hangzhou
Tel: 86-571-8792-8115

China - Hong Kong SAR
Tel: 852-2943-5100

China - Nanjing
Tel: 86-25-8473-2460

China - Qingdao
Tel: 86-532-8502-7355

China - Shanghai
Tel: 86-21-3326-8000

China - Shenyang
Tel: 86-24-2334-2829

China - Shenzhen
Tel: 86-755-8864-2200

China - Suzhou
Tel: 86-186-6233-1526

China - Wuhan
Tel: 86-27-5980-5300

China - Xian
Tel: 86-29-8833-7252

China - Xiamen
Tel: 86-592-2388138

China - Zhuhai
Tel: 86-756-3210040

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444

India - New Delhi
Tel: 91-11-4160-8631

India - Pune
Tel: 91-20-4121-0141

Japan - Osaka
Tel: 81-6-6152-7160

Japan - Tokyo
Tel: 81-3-6880-3770

Korea - Daegu
Tel: 82-53-744-4301

Korea - Seoul
Tel: 82-2-554-7200

Malaysia - Kuala Lumpur
Tel: 60-3-7651-7906

Malaysia - Penang
Tel: 60-4-227-8870

Philippines - Manila
Tel: 63-2-634-9065

Singapore
Tel: 65-6334-8870

Taiwan - Hsin Chu
Tel: 886-3-577-8366

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600

Thailand - Bangkok
Tel: 66-2-694-1351

Vietnam - Ho Chi Minh
Tel: 84-28-5448-2100

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4485-5910
Fax: 45-4485-2829

Finland - Espoo
Tel: 358-9-4520-820

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Garching
Tel: 49-8931-9700

Germany - Haan
Tel: 49-2129-3766400

Germany - Heilbronn
Tel: 49-7131-72400

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Rosenheim
Tel: 49-8031-354-560

Israel - Ra'anana
Tel: 972-9-744-7705

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Padova
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Norway - Trondheim
Tel: 47-7288-4388

Poland - Warsaw
Tel: 48-22-3325737

Romania - Bucharest
Tel: 40-21-407-87-50

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Gothenberg
Tel: 46-31-704-60-40

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820