

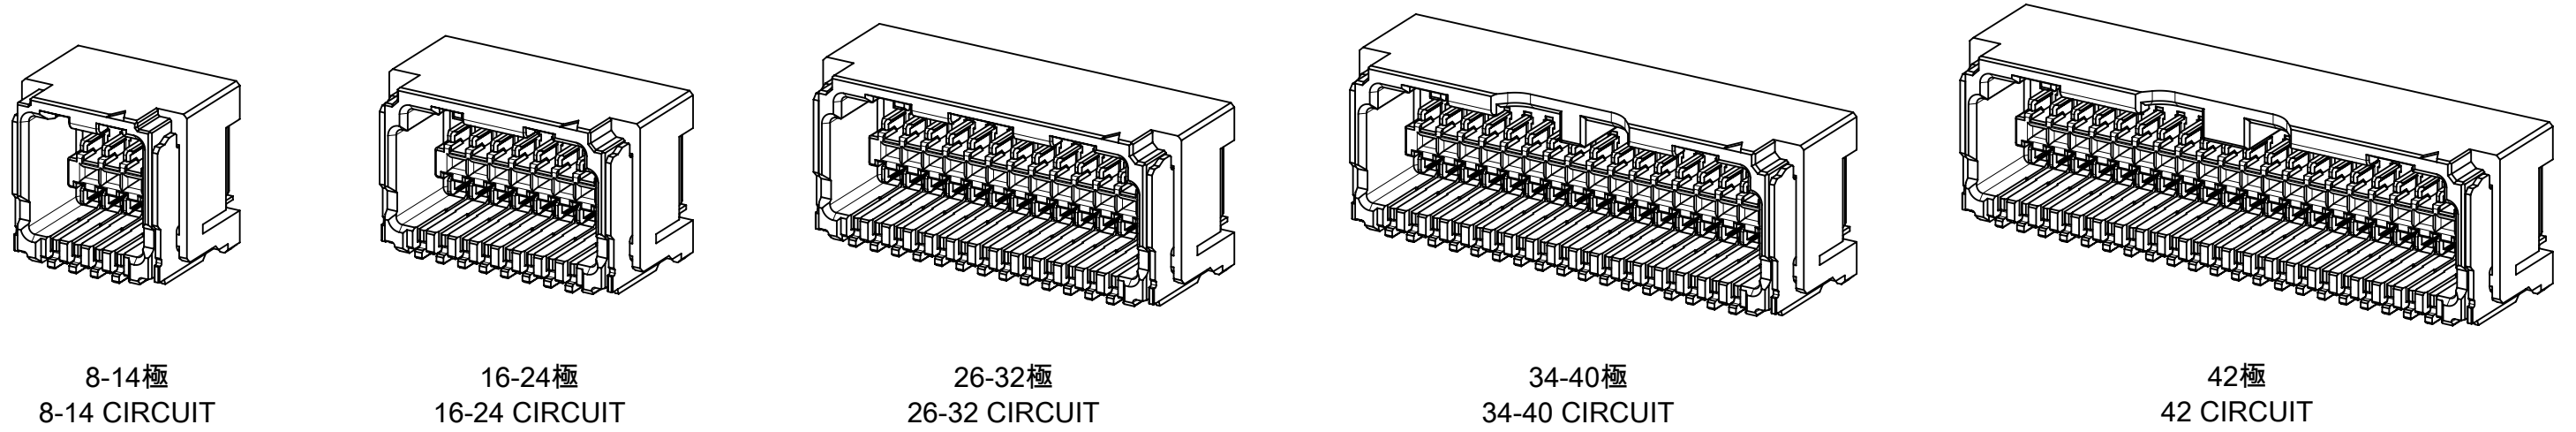


製品形状
PRODUCT SHAPE

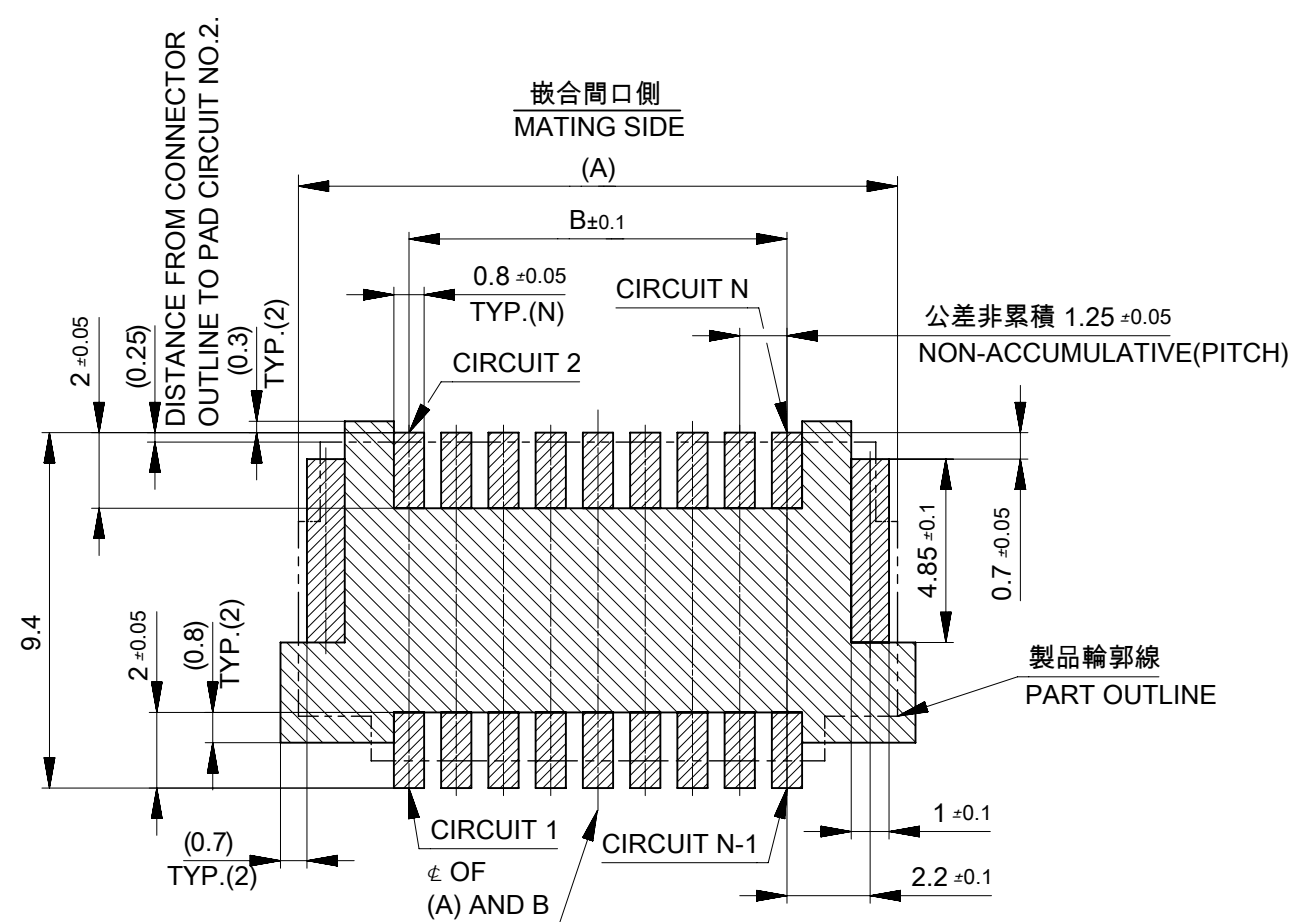


嵌合状態図
MATED CONNECTORS

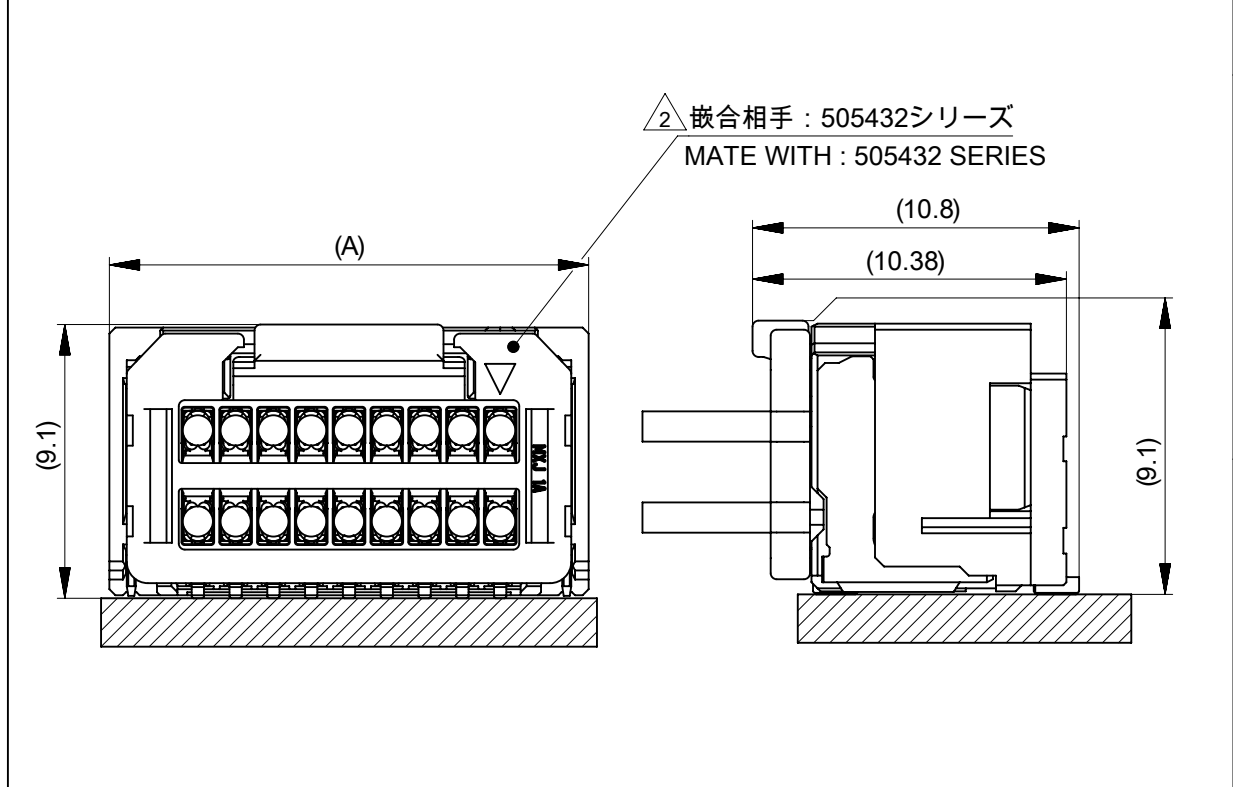


基板パターンレイアウト (参考)
(参考 : 基板厚 1.6mm, メタルマスク厚さ 0.15mm, マスク開口率 100%)

RECOMMEND PWB LAYOUT : COMPONENT SIDE
(REFERENCE : PWB THICKNESS 1.6mm, STENCIL THICKNESS 0.15mm, APERTURE RATIO 100%)

パターン非推奨エリア
パターンを引き回す際は、製品機能に影響がないことをご確認ください。
PATTERN IS NOT RECOMMENDED ON THE HATCHING AREA
PLEASE CHECK NOT TO HAVE PROBLEM FOR PRODUCT FUNCTION
WHEN SETTING PATTERN ON THE HATCHING AREA.


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: REVISED				molex	
mm		NTS							
GENERAL TOLERANCES (UNLESS SPECIFIED)				MICRO-LOCK PLUS 1.25 W/B DUAL ROW RIGHT ANGLE SMT PLUG ASSEMBLY GOLD PLATING					
ANGULAR TOL ± 3.0°									
4 PLACES		± 0.2		EC NO: 630688				PRODUCT CUSTOMER DRAWING	
3 PLACES		± 0.2		DRWN: TENAGASE 2020/01/20					
2 PLACES		± 0.2		CHK'D: SAKIYAMA 2020/01/21					
1 PLACE		± 0.2		APPR: KOMURAKAMI 2020/01/23				DOCUMENT NUMBER 5054480003-SD	
0 PLACES		± 0.2		INITIAL REVISION:					
				DRWN: TAKAIKE 2019/08/21					
				APPR: AIDA 2019/12/26				DOC TYPE PSD	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		DOC PART 000	
				A3-SIZE		505448		B	
								REVISION	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	
								5054480003-SD	
								PSD	
								000	
								B	

DOCUMENT STATUS	P1	RELEASE DATE	2020/01/23	05:31:33
-----------------	----	--------------	------------	----------

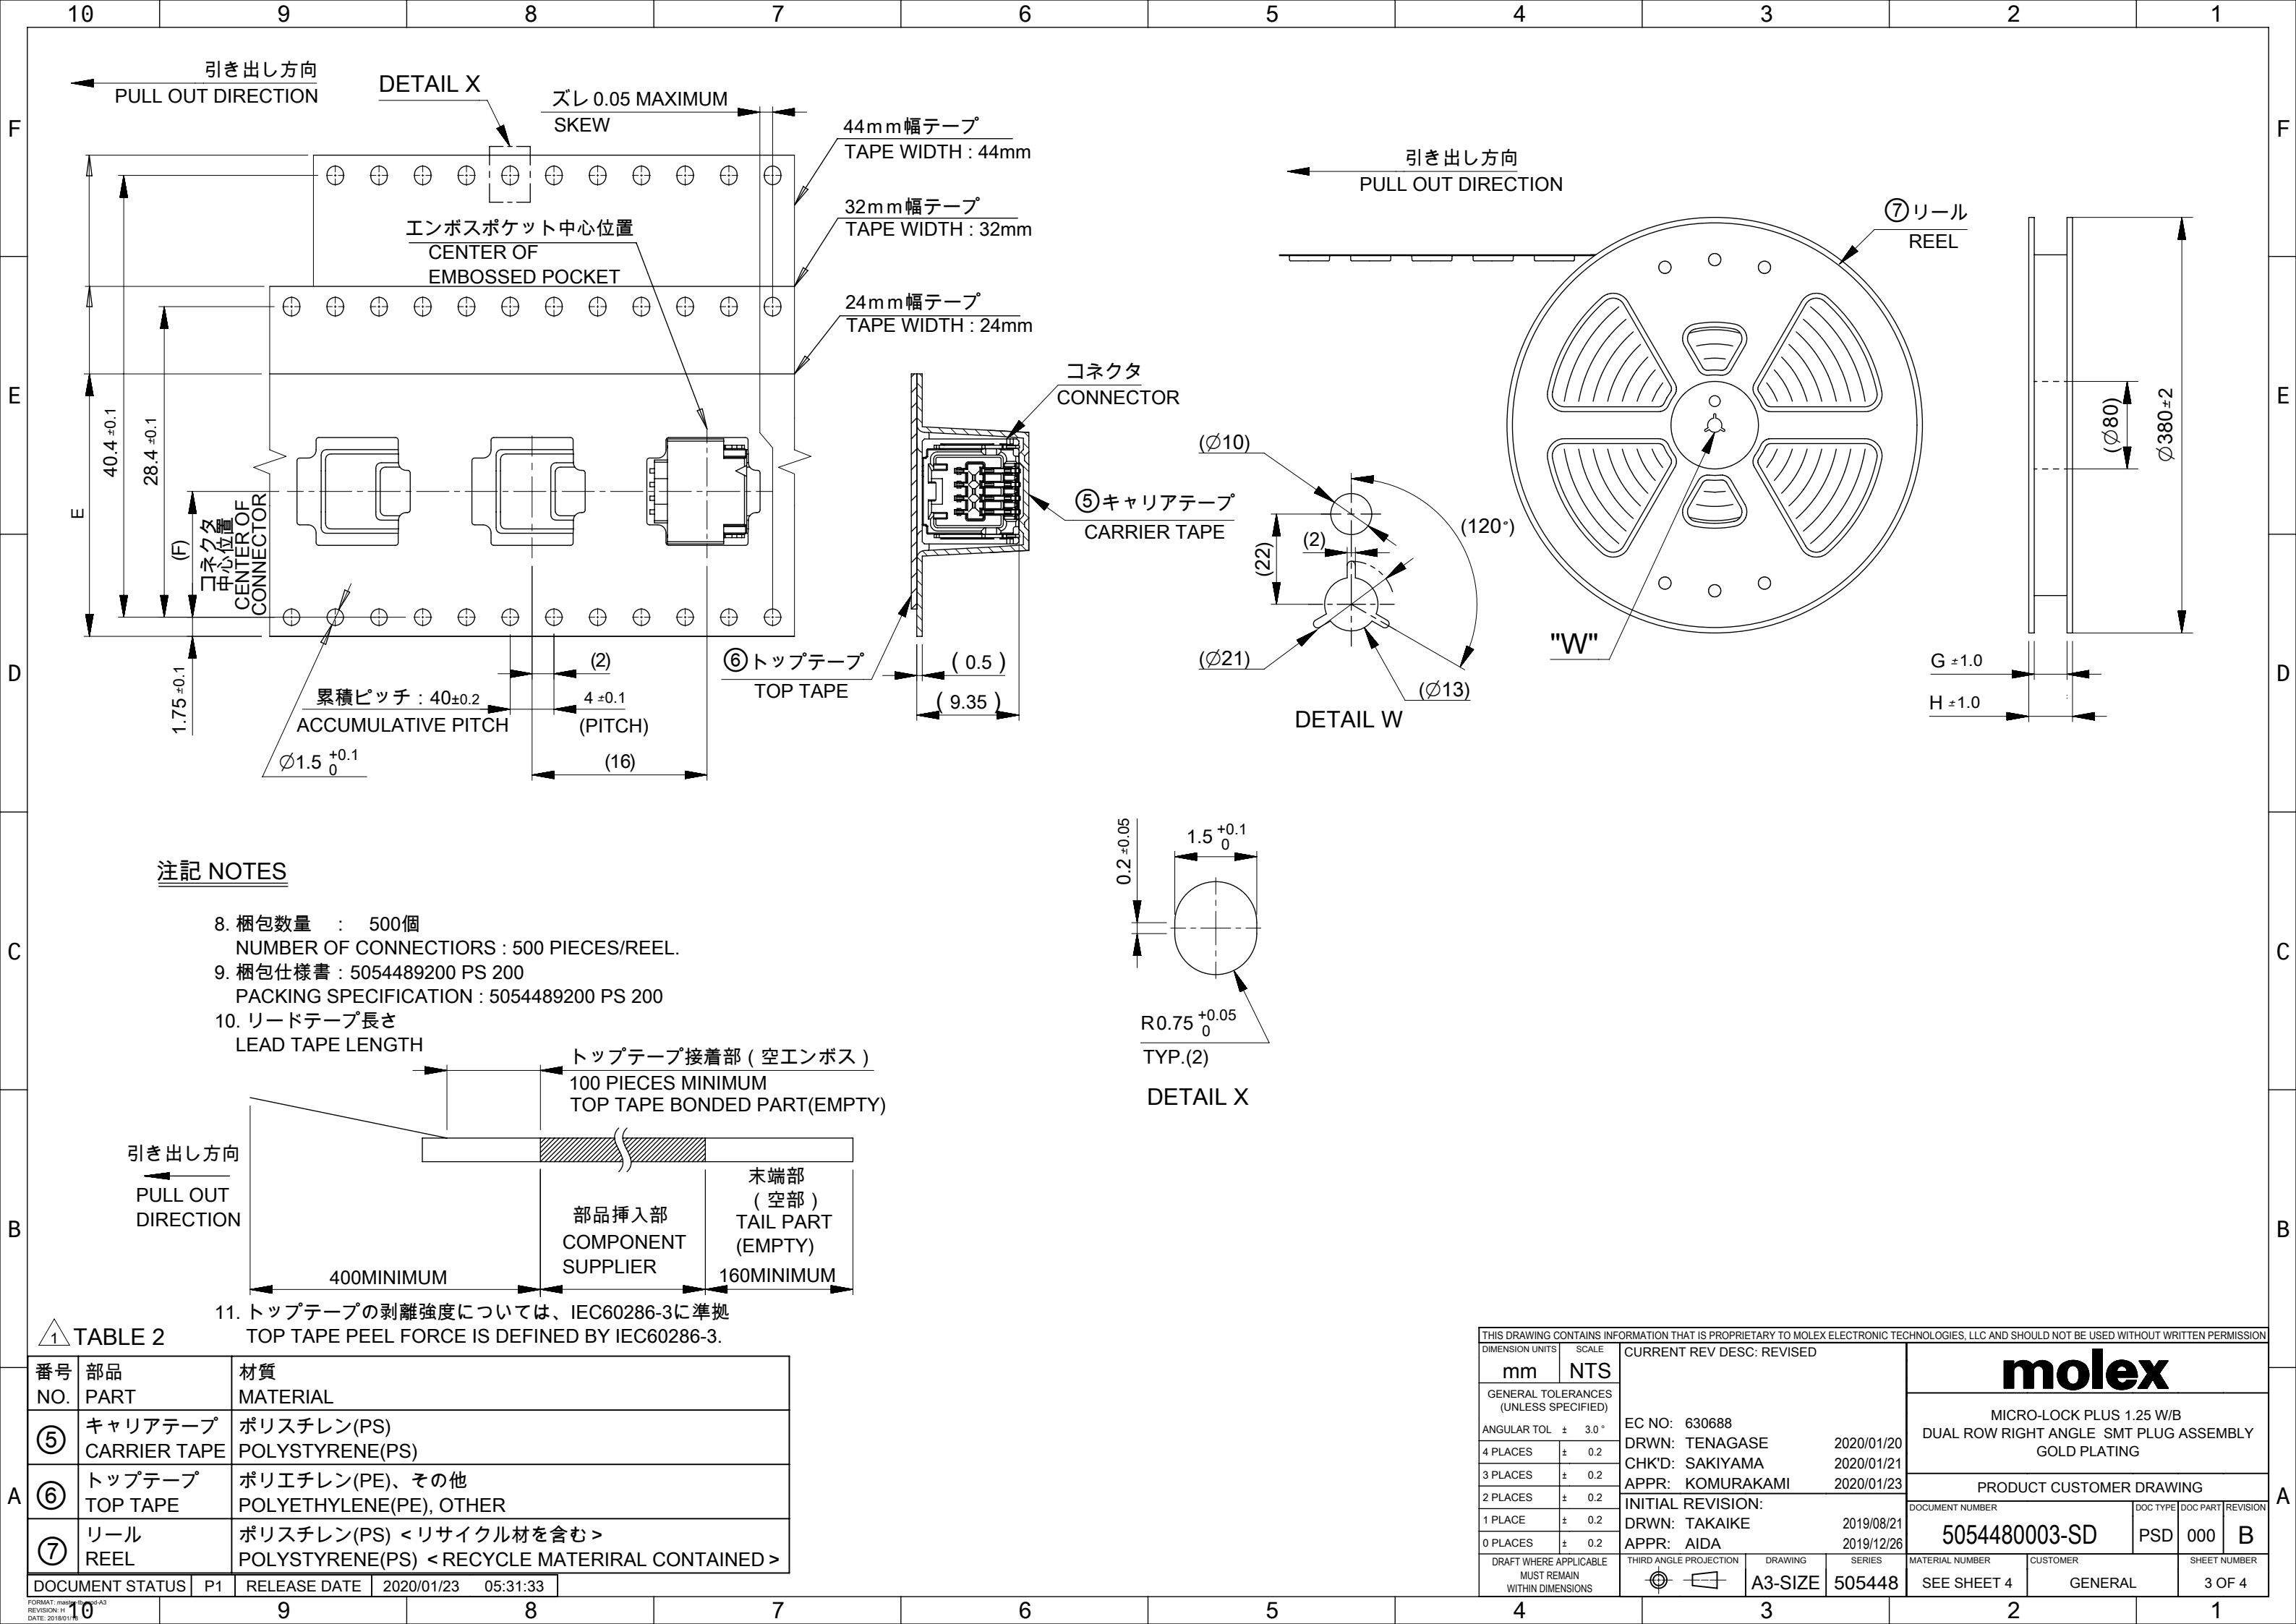

注記 NOTES

8. 梱包数量 : 500個
NUMBER OF CONNECTIONS : 500 PIECES/REEL.
9. 梱包仕様書 : 5054489200 PS 200
PACKING SPECIFICATION : 5054489200 PS 200
10. リードテープ長さ
LEAD TAPE LENGTH

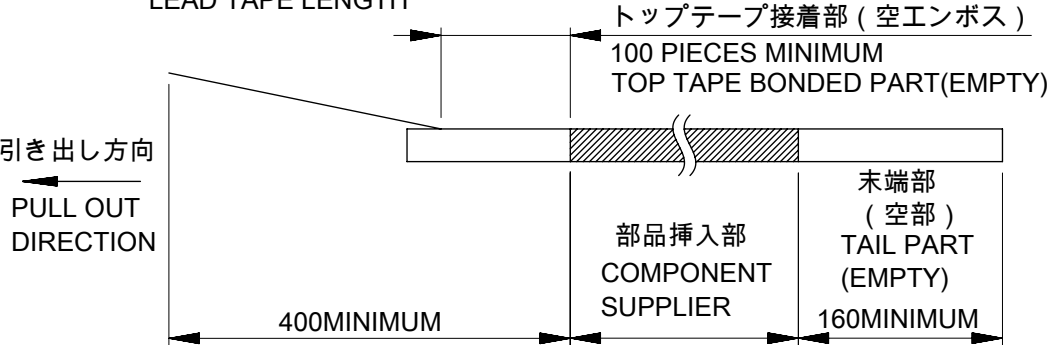

11. トップテープの剥離強度については、IEC60286-3に準拠
TOP TAPE PEEL FORCE IS DEFINED BY IEC60286-3.

TABLE 2

番号 NO.	部品 PART	材質 MATERIAL
⑤	キャリアテープ CARRIER TAPE	ポリスチレン(PS) POLYSTYRENE(PS)
⑥	トップテープ TOP TAPE	ポリエチレン(PE)、その他 POLYETHYLENE(PE), OTHER
⑦	リール REEL	ポリスチレン(PS) <リサイクル材を含む> POLYSTYRENE(PS) <RECYCLE MATERIRAL CONTAINED >

DOCUMENT STATUS	P1	RELEASE DATE	2020/01/23	05:31:33
-----------------	----	--------------	------------	----------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: REVISED		molex		
DIMENSION UNITS		SCALE		MICRO-LOCK PLUS 1.25 W/B DUAL ROW RIGHT ANGLE SMT PLUG ASSEMBLY GOLD PLATING		
mm		NTS		PRODUCT CUSTOMER DRAWING		
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 630688		DOCUMENT NUMBER		
ANGULAR TOL		± 3.0 °		5054480003-SD		
4 PLACES		± 0.2		PSD 000 B		
3 PLACES		± 0.2		2019/08/21		
2 PLACES		± 0.2		2020/01/23		
1 PLACE		± 0.2		INITIAL REVISION:		
0 PLACES		± 0.2		DRWN: TAKAIKE 2019/08/21		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		APPR: AIDA 2019/12/26		
		DRAWING		MATERIAL NUMBER		
		A3-SIZE		CUSTOMER		
		505448		SHEET NUMBER		
				SEE SHEET 4		
				GENERAL		
				3 OF 4		

