


1. MECHANICAL DIMENSIONS :


REV.	DATE	DESCRIPTION
01	Jan. 11, '18	1st RELEASE

- NOTES:
- MATERIAL:
HOUSING: HIGH THERMOPLASTIC, UL94V-0, BLACK
CONTACTS: T=0.35mm PHOS-BRONZE,
6u" GOLD PLATING AND
GOLD FLASH ON SOLDER AREA
SHIELD: T=0.25mm COPPER ALLOY, NICKEL PLATING
 - OPERATING TEMPERATURE: -40°C~+85°C
 - INSERTION FORCE: 4 POUNDS MAX.
EXTRACTION FORCE: 4 POUNDS MAX.
 - DURABILITY: 750 MATING CYCLED MIN.
 - CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68,
SUBPART F.
 - UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

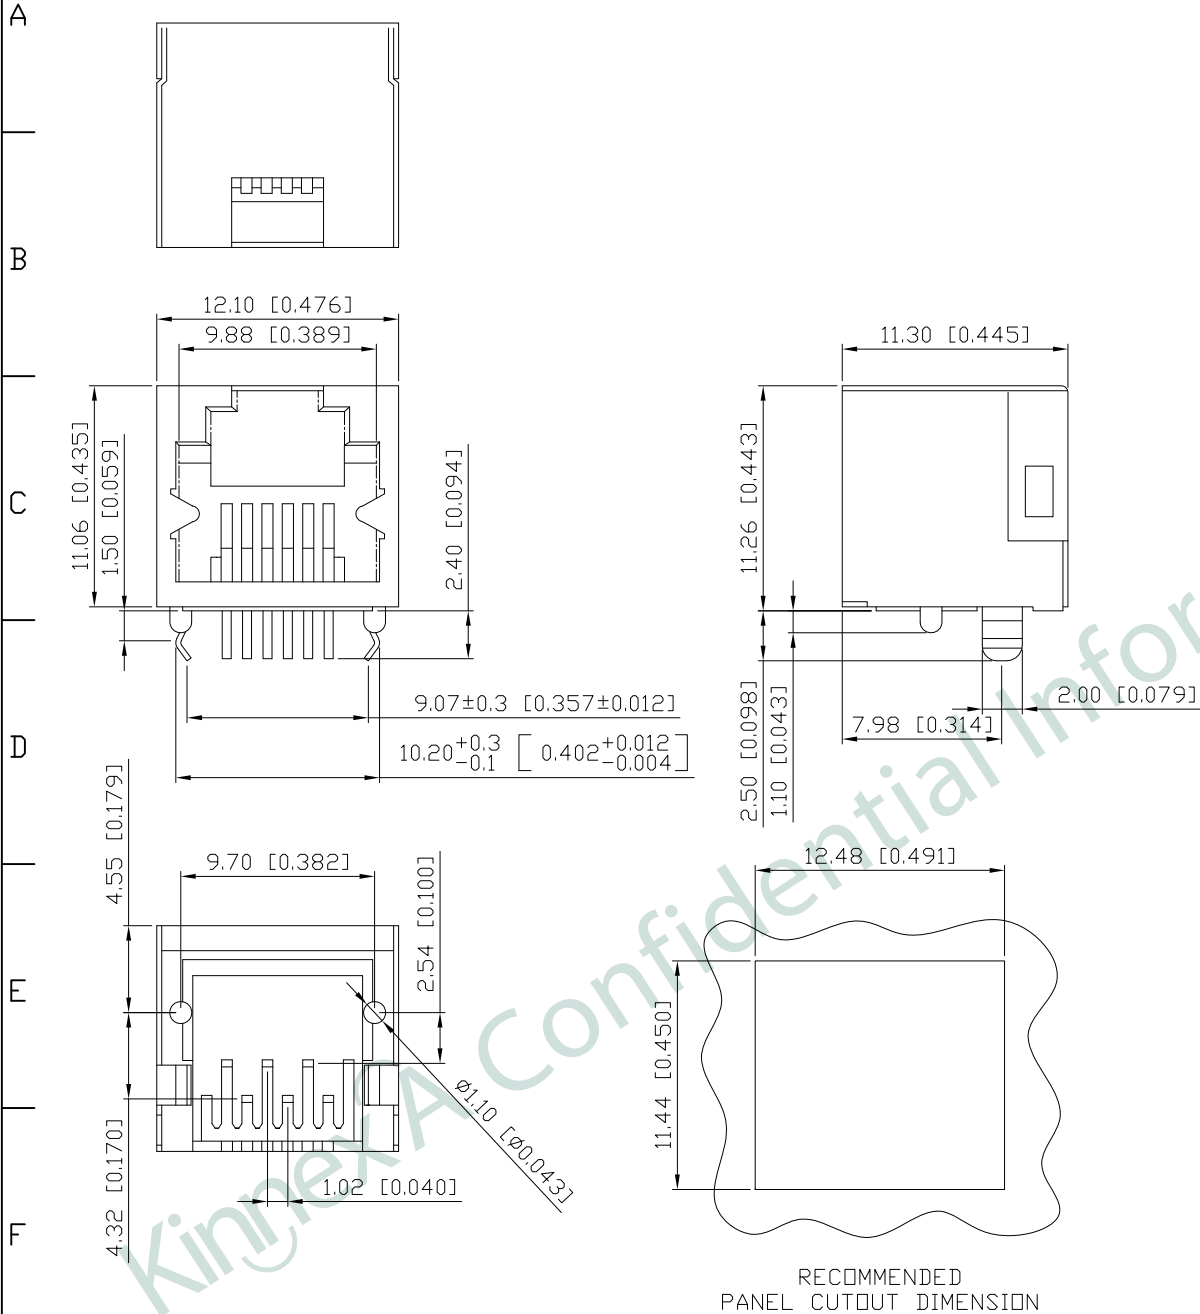

PART NO KRM-S-01-6-6-0-6B4				
TITLE	RJ25 6P6C, W/O LED, SHIELDED			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	DANIEL	Jan. 11, '18	1 of 3

2. PCB LAYOUT :

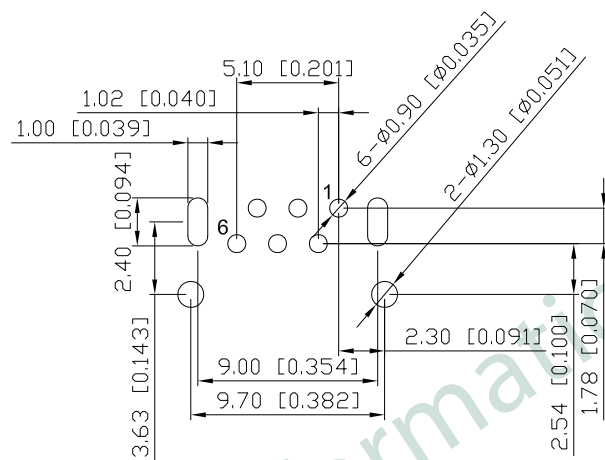

SUGGESTED PCB LAYOUT
(TOP VIEW)

DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

KRM-S-01-6-6-0-6B4

PRODUCT SERIES
KRM : LATCH UP THRU HOLE

SHIELDED
S: SHIELDED

NO. OF PORTS

NO. OF POSITION

NO. OF CONTACT

CONTACT GOLD PLATING OPTION

SERIAL NUMBER

RUNNING CODE

LED COLOR OPTION

PART NO KRM-S-01-6-6-0-6B4				
TITLE	RJ25 6P6C, W/O LED, SHIELDED			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	DANIEL	Jan. 11, '18	2 of 3

DWG NO KRM-S-01-6-6-0-6B4

KinnexA, INC. 8F, No. 172, CHENG TEH ROAD SEC. 4, TAIPEI 11167, TAIWAN

Connected
by


KinnexA

RoHS Compliant

PRELIMINARY RELEASE SUBJECT TO CHANGE

※ THIS DRAWING IS A CONTROLLED DOCUMENT ※

3. PROFILE OF WAVE SOLDER :

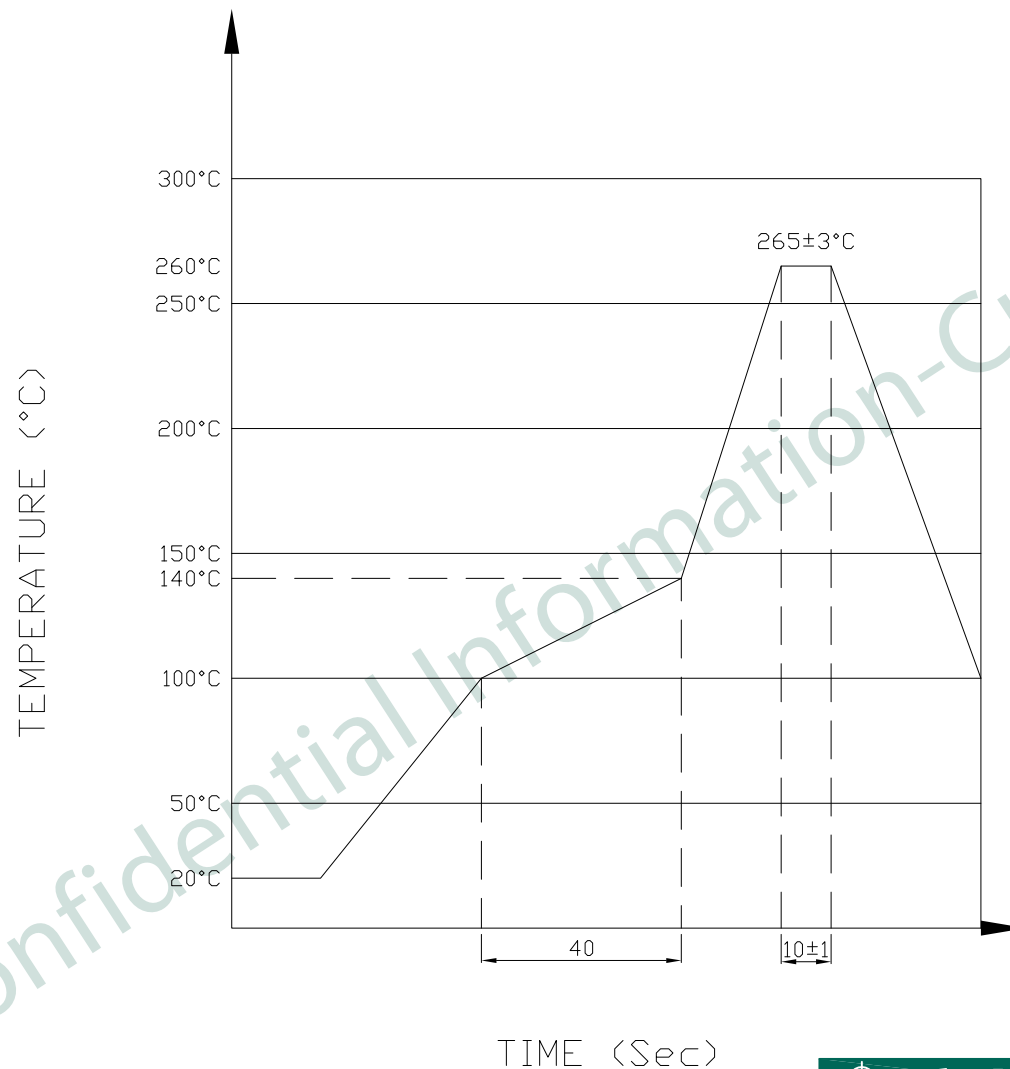

The measuring point for the specified temperature shall be on the soldered part of the lead

PART NO KRM-S-01-6-6-0-6B4				
TITLE	RJ25 6P6C, W/O LED, SHIELDED			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	DANIEL	Jan. 11, '18	3 of 3