

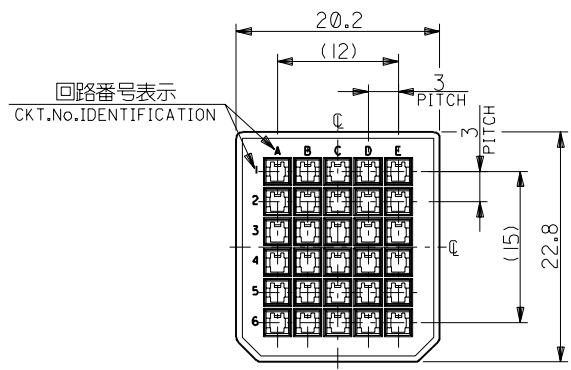
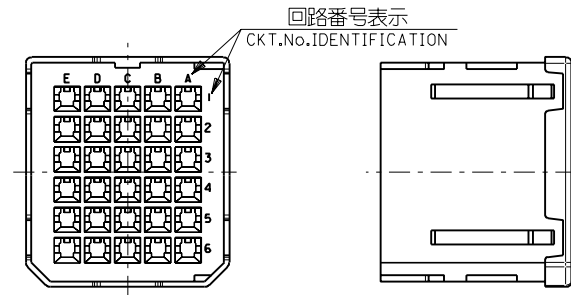


8 7 6 5 4 3 2 1



嵌合側
MATING SIDE



電線挿入側
WIRE SIDE

注記
NOTES

1. 材質
MATERIAL
ガラス入りPBT樹脂 UL94V-0 色:黒
HOUSING : PBT G.F. UL94V-0 COLOR : BLACK
2. 適用端子 : 56116-8*90 , 56117-8*90
56118-8*90 , 56119-8*90
APPLICABLE CRIMP PIN : 56116-8*90 , 56117-8*90
56118-8*90 , 56119-8*90
3. 適用シェルボディ : 56380-3000
APPLICABLE SHELL BODY : 56380-3000
4. 適用シェルカバー : 56381-3000
APPLICABLE SHELL COVER : 56381-3000
5. 嵌合相手 : 51238-301*
MEET WITH : 51238-301*

<誤嵌合防止キー（極性）タイプ> <POLARITY KEY TYPE>

51234-3001	51234-3002	51234-3003	51234-3004	51234-3005
STANDARD TYPE	A TYPE	B TYPE	C TYPE	D TYPE

B-3	D	51234-3005	51234-**0*	30
D-4	C	51234-3004		
C-4	B	51234-3003		
C-3	A	51234-3002		
—#—	STANDARD	51234-3001		
POLARITY POSITION (CIRCUIT No.)	POLARITY TYPE	MATERIAL No.	MODEL No.	CIRCUIT

EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	REVISED 01/10/04 EC NO. J2002-0786 DRWN: S.AKIYAMA CHK: J.MIYAZAWA APPR: YO.ITO	RELEASED 01/02/09 EC NO. JD2001-1040 DRWN: S.AKIYAMA CHK: J.MIYAZAWA APPR: H.IKESUGI	DESCRIPTION MATERIAL 材料 注記参照 SEE NOTES FINISH 仕上り —#— WIRE RANGE 適用電線範囲 —#— INS. RANGE 被覆外径 —#—	GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差 10 UNDER 未満 ±0.2 10 OVER 以上 30 UNDER 未満 ±0.25 30 OVER 以上 ±0.3 ANGLE 角度 ±3°	SCALE 2-1 DESIGN UNITS ☒ mm ☐ INCH THIRD ANGLE PROJECTION TITLE: COMPACT ROBOT CONN.(CRC) PLUG PIN HS'G MOLEX INCORPORATED MATERIAL NO. SEE CHART DRAWING NO. SD-51234-006 SHEET NO. 1 OF 1	DRAWN BY & DATE S. Akiyama 01/01/25 CHECKED BY & DATE J. Miyazawa / Y. Ito APPROVED BY & DATE Yo. Ito CAD FILE NAME 51234006.S01	REVISE ON CAD ONLY

8 7 6 5 4 3 2 1