


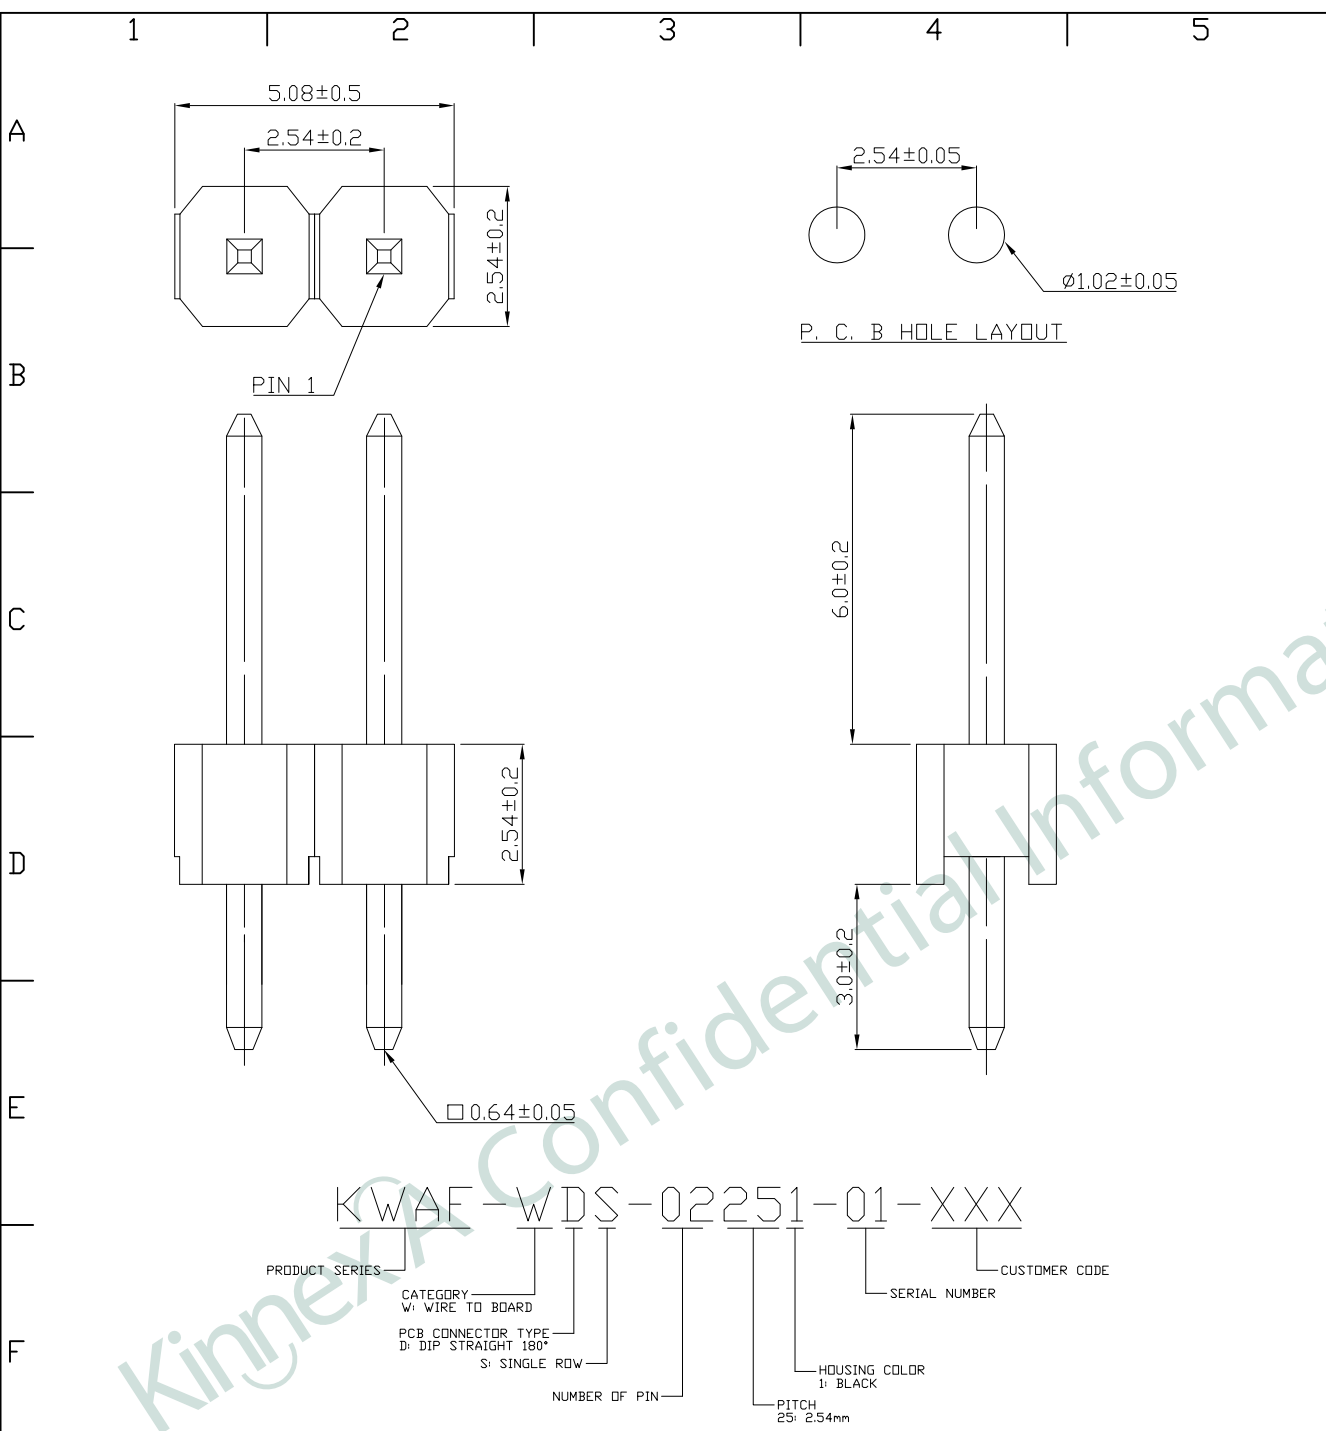

REV.	DATE	DESCRIPTION
01	May. 26, '20	1st RELEASE

NOTES:
1. SPECIFICATIONS
CURRENT RATING: 3Amps
OPERATING TEMPERATURE: -40°C ~ +105°C
CONTACT MATERIAL: COPPER ALLOY
INSULATION RESISTANCE: 5000MΩ MIN.
DIELECTRIC WITHSTANDING: AC 1000 V
INSULATOR MATERIAL: POLYESTER, UL 94V-0
STANDARD: P.B.T
FINISH: TIN, GOLD OR DUPLEX PLATED
STANDARD: GOLD FLASH ALL OVER
2. UNSPECIFIED TOLERANCE: .XX ±0.15
.X ±0.20

KWAF-WDS-02251-01-XXX

PRODUCT SERIES: KWAF
CATEGORY: W: WIRE TO BOARD
PCB CONNECTOR TYPE: D: DIP STRAIGHT 180°
S: SINGLE ROW
NUMBER OF PIN: 2
HOUSING COLOR: 1: BLACK
PITCH: 25: 2.54mm
SERIAL NUMBER: 02251
CUSTOMER CODE: 01-XXX

 PART NO		KWAF-WDS-02251-01-XXX		
TITLE	WIRE TO BOARD, DIP STRAIGHT 180*, SINGLE ROW, PITCH=2.54mm			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	VINCENT	May. 26, '20	1 of 1

RoHS Compliant