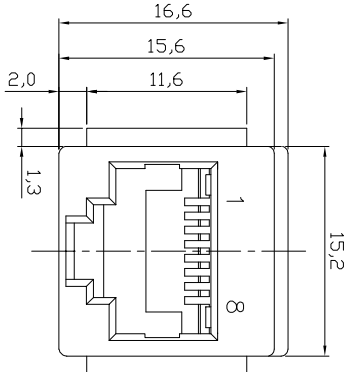
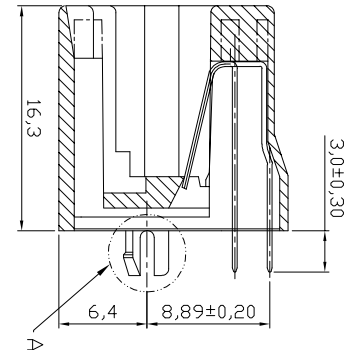
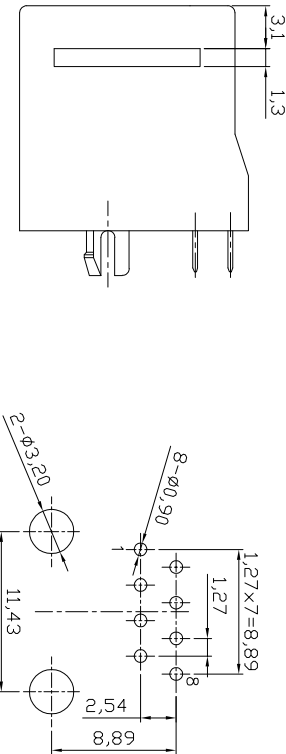
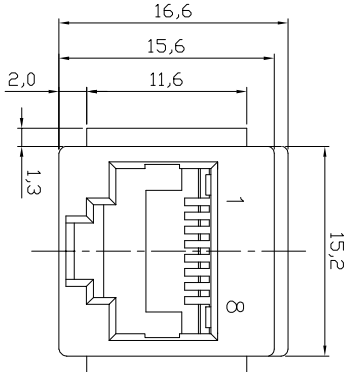
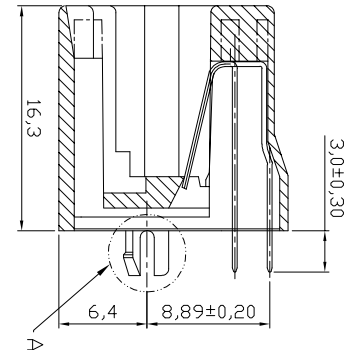
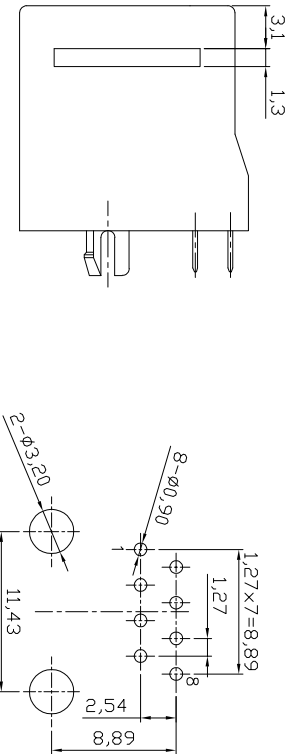
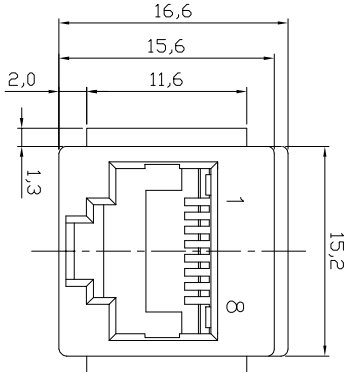
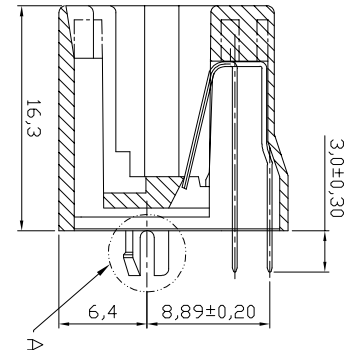
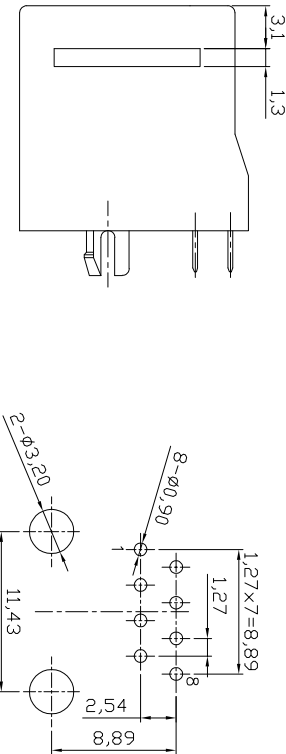
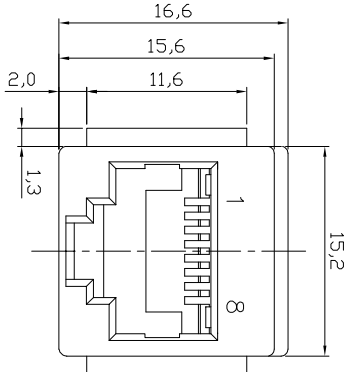
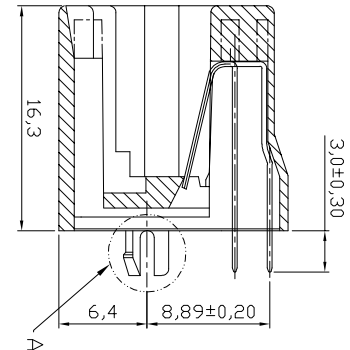
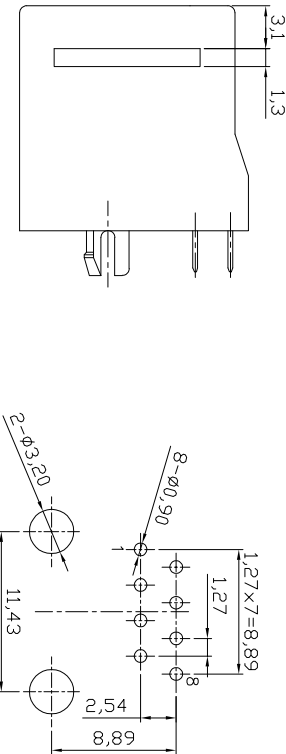
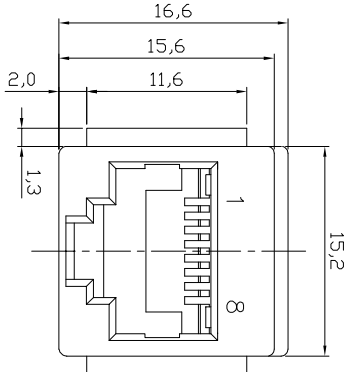
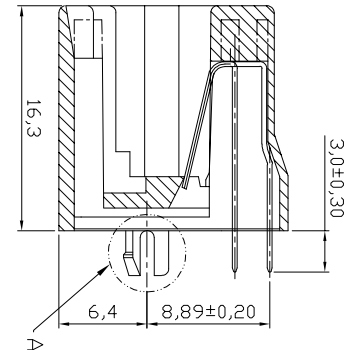
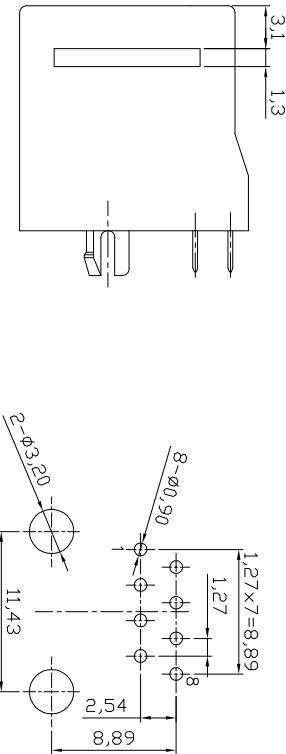
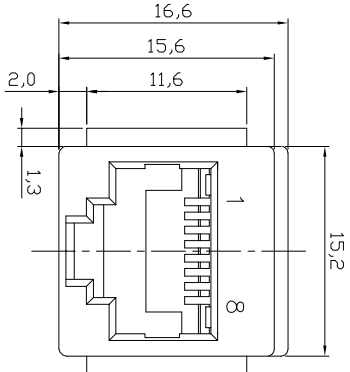
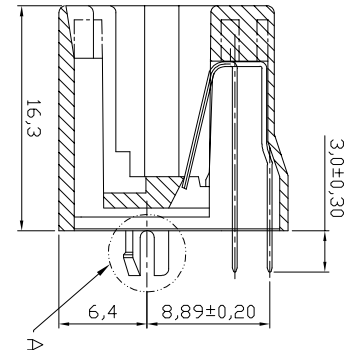
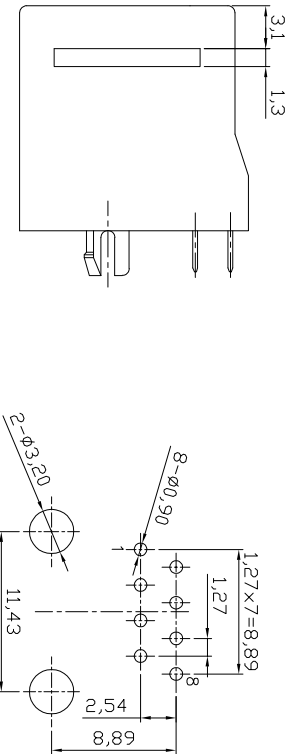
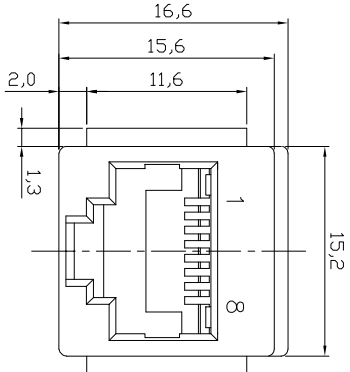
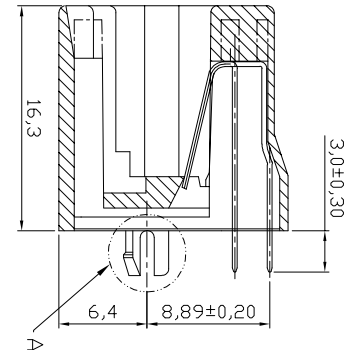
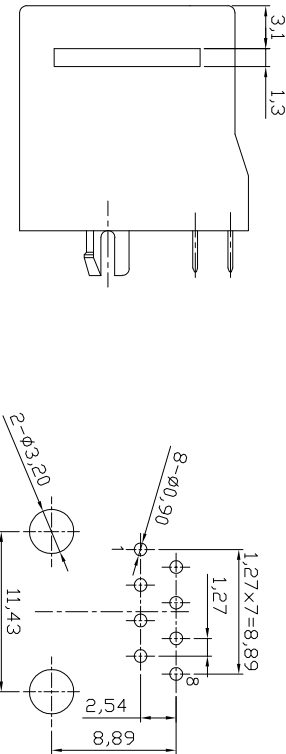
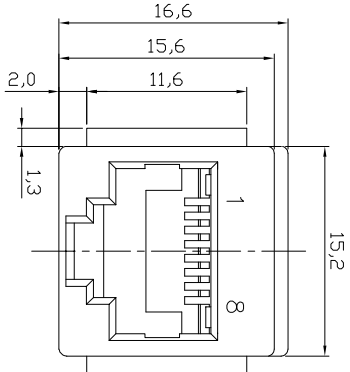
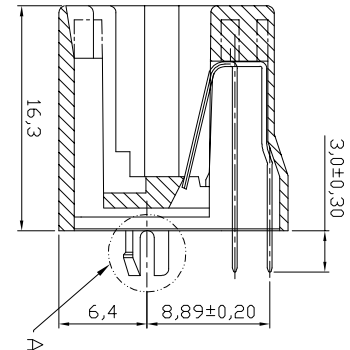
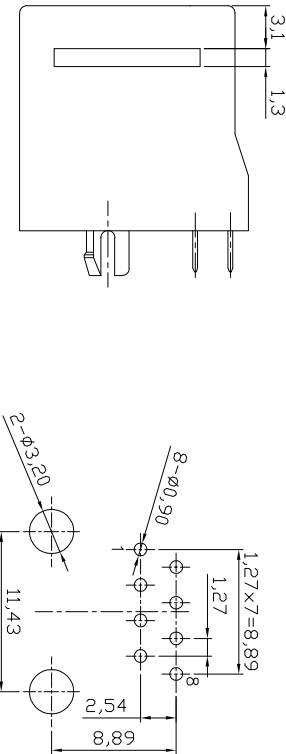


	1	2	3	4	5	6	7	
A	   NOTES: Mechanical: 1. Housing material : Glass Filled Polyester UL94V-0 , Color: Black 2. Contact material: Phosphor Bronze t=0.35mm 3. Contact plating: Contact area---see order code Tails---100~200u" Tin plated over 30~80u" Nickel 4. Operating Life: 750 Cycles min. 5. PCB Retention Pre-solder: 1 LB min. 6. PCB Retention Post-solder: 10 LBS min. Electrical: 1. Voltage Rating: 125VAC. 2. Current Rating: 1.5AMP. 3. Contact Resistance: 30mΩ max. 4. Insulation Resistance: 1000MΩ min. @ 500 VDC 5. Dielectric Strength: 1000 VAC 60Hz, 1 min. Environmental: 1. Storage: -40°C To +85°C 2. Operation: -40°C~+85°C 3. Wave Soldering Temp: 200~220°C(5~10S) Packing: 100pcs/Tray, 3200pcs/Cartron Order code: A-2014-2-X							
B	   NOTES: Mechanical: 1. Housing material : Glass Filled Polyester UL94V-0 , Color: Black 2. Contact material: Phosphor Bronze t=0.35mm 3. Contact plating: Contact area---see order code Tails---100~200u" Tin plated over 30~80u" Nickel 4. Operating Life: 750 Cycles min. 5. PCB Retention Pre-solder: 1 LB min. 6. PCB Retention Post-solder: 10 LBS min. Electrical: 1. Voltage Rating: 125VAC. 2. Current Rating: 1.5AMP. 3. Contact Resistance: 30mΩ max. 4. Insulation Resistance: 1000MΩ min. @ 500 VDC 5. Dielectric Strength: 1000 VAC 60Hz, 1 min. Environmental: 1. Storage: -40°C To +85°C 2. Operation: -40°C~+85°C 3. Wave Soldering Temp: 200~220°C(5~10S) Packing: 100pcs/Tray, 3200pcs/Cartron Order code: A-2014-2-X							
C	   NOTES: Mechanical: 1. Housing material : Glass Filled Polyester UL94V-0 , Color: Black 2. Contact material: Phosphor Bronze t=0.35mm 3. Contact plating: Contact area---see order code Tails---100~200u" Tin plated over 30~80u" Nickel 4. Operating Life: 750 Cycles min. 5. PCB Retention Pre-solder: 1 LB min. 6. PCB Retention Post-solder: 10 LBS min. Electrical: 1. Voltage Rating: 125VAC. 2. Current Rating: 1.5AMP. 3. Contact Resistance: 30mΩ max. 4. Insulation Resistance: 1000MΩ min. @ 500 VDC 5. Dielectric Strength: 1000 VAC 60Hz, 1 min. Environmental: 1. Storage: -40°C To +85°C 2. Operation: -40°C~+85°C 3. Wave Soldering Temp: 200~220°C(5~10S) Packing: 100pcs/Tray, 3200pcs/Cartron Order code: A-2014-2-X							
D	   NOTES: Mechanical: 1. Housing material : Glass Filled Polyester UL94V-0 , Color: Black 2. Contact material: Phosphor Bronze t=0.35mm 3. Contact plating: Contact area---see order code Tails---100~200u" Tin plated over 30~80u" Nickel 4. Operating Life: 750 Cycles min. 5. PCB Retention Pre-solder: 1 LB min. 6. PCB Retention Post-solder: 10 LBS min. Electrical: 1. Voltage Rating: 125VAC. 2. Current Rating: 1.5AMP. 3. Contact Resistance: 30mΩ max. 4. Insulation Resistance: 1000MΩ min. @ 500 VDC 5. Dielectric Strength: 1000 VAC 60Hz, 1 min. Environmental: 1. Storage: -40°C To +85°C 2. Operation: -40°C~+85°C 3. Wave Soldering Temp: 200~220°C(5~10S) Packing: 100pcs/Tray, 3200pcs/Cartron Order code: A-2014-2-X							
E	   NOTES: Mechanical: 1. Housing material : Glass Filled Polyester UL94V-0 , Color: Black 2. Contact material: Phosphor Bronze t=0.35mm 3. Contact plating: Contact area---see order code Tails---100~200u" Tin plated over 30~80u" Nickel 4. Operating Life: 750 Cycles min. 5. PCB Retention Pre-solder: 1 LB min. 6. PCB Retention Post-solder: 10 LBS min. Electrical: 1. Voltage Rating: 125VAC. 2. Current Rating: 1.5AMP. 3. Contact Resistance: 30mΩ max. 4. Insulation Resistance: 1000MΩ min. @ 500 VDC 5. Dielectric Strength: 1000 VAC 60Hz, 1 min. Environmental: 1. Storage: -40°C To +85°C 2. Operation: -40°C~+85°C 3. Wave Soldering Temp: 200~220°C(5~10S) Packing: 100pcs/Tray, 3200pcs/Cartron Order code: A-2014-2-X							
F	   NOTES: Mechanical: 1. Housing material : Glass Filled Polyester UL94V-0 , Color: Black 2. Contact material: Phosphor Bronze t=0.35mm 3. Contact plating: Contact area---see order code Tails---100~200u" Tin plated over 30~80u" Nickel 4. Operating Life: 750 Cycles min. 5. PCB Retention Pre-solder: 1 LB min. 6. PCB Retention Post-solder: 10 LBS min. Electrical: 1. Voltage Rating: 125VAC. 2. Current Rating: 1.5AMP. 3. Contact Resistance: 30mΩ max. 4. Insulation Resistance: 1000MΩ min. @ 500 VDC 5. Dielectric Strength: 1000 VAC 60Hz, 1 min. Environmental: 1. Storage: -40°C To +85°C 2. Operation: -40°C~+85°C 3. Wave Soldering Temp: 200~220°C(5~10S) Packing: 100pcs/Tray, 3200pcs/Cartron Order code: A-2014-2-X							
G	   NOTES: Mechanical: 1. Housing material : Glass Filled Polyester UL94V-0 , Color: Black 2. Contact material: Phosphor Bronze t=0.35mm 3. Contact plating: Contact area---see order code Tails---100~200u" Tin plated over 30~80u" Nickel 4. Operating Life: 750 Cycles min. 5. PCB Retention Pre-solder: 1 LB min. 6. PCB Retention Post-solder: 10 LBS min. Electrical: 1. Voltage Rating: 125VAC. 2. Current Rating: 1.5AMP. 3. Contact Resistance: 30mΩ max. 4. Insulation Resistance: 1000MΩ min. @ 500 VDC 5. Dielectric Strength: 1000 VAC 60Hz, 1 min. Environmental: 1. Storage: -40°C To +85°C 2. Operation: -40°C~+85°C 3. Wave Soldering Temp: 200~220°C(5~10S) Packing: 100pcs/Tray, 3200pcs/Cartron Order code: A-2014-2-X							
H	   NOTES: Mechanical: 1. Housing material : Glass Filled Polyester UL94V-0 , Color: Black 2. Contact material: Phosphor Bronze t=0.35mm 3. Contact plating: Contact area---see order code Tails---100~200u" Tin plated over 30~80u" Nickel 4. Operating Life: 750 Cycles min. 5. PCB Retention Pre-solder: 1 LB min. 6. PCB Retention Post-solder: 10 LBS min. Electrical: 1. Voltage Rating: 125VAC. 2. Current Rating: 1.5AMP. 3. Contact Resistance: 30mΩ max. 4. Insulation Resistance: 1000MΩ min. @ 500 VDC 5. Dielectric Strength: 1000 VAC 60Hz, 1 min. Environmental: 1. Storage: -40°C To +85°C 2. Operation: -40°C~+85°C 3. Wave Soldering Temp: 200~220°C(5~10S) Packing: 100pcs/Tray, 3200pcs/Cartron Order code: A-2014-2-X							

Frequency	Near-End Cross Talk dB, MIN.	Return Loss dB, MIN.
1.0 MHz	65.0	23.0
4.0 MHz	65.0	23.0
8.0 MHz	62.0	23.0
10.0 MHz	60.0	23.0
16.0 MHz	56.0	23.0
20.0 MHz	54.0	23.0
25.0 MHz	52.0	14.0
31.25 MHz	50.0	14.0
62.5 MHz	44.0	14.0
100.0 MHz	40.0	14.0

RoHS compliant
Unit:mm

Scale	Free						Customer-No.
TOLERANCE							
X.X	±0.20						
X.XX	±0.15						
X.XXX	±0.10						
DIM	TOL	①	Update the detail plating information	21.08.2015	Amy		
		①	Drawn	27.05.2013	Amy		
Angle	±5°	Id.	Modification	Date	Name		

ASSMANN
components

Drawing-No.
ASS 5705 CO
A-2014-2-X

Replace
ASS 5705 CO
rev01
SHEET