


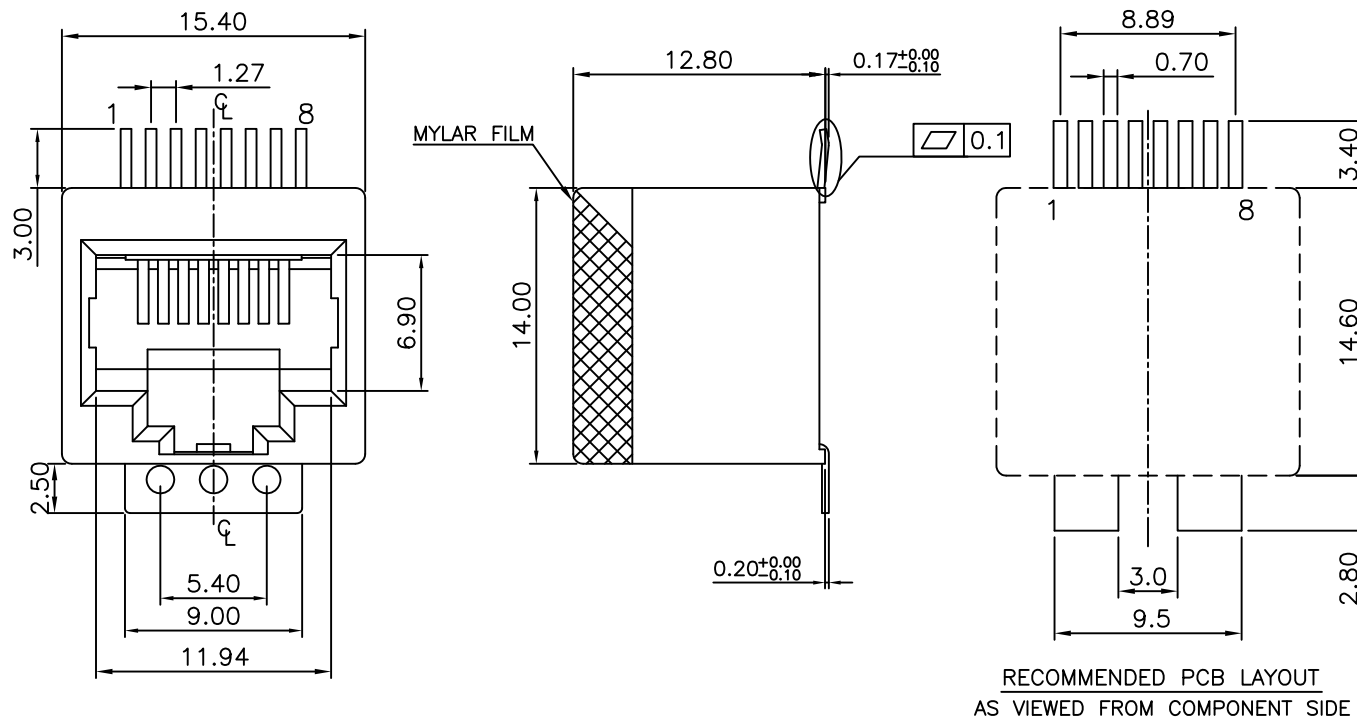

Specification 规格:

Electrical 电气规格:

Voltage Rating 电压额定值: 125 V AC (RMS)
Current Rating 电流额定值: 1.5 Amp
Contact Resistance 接触电阻值: 30mΩ Max.
Insulation Resistance 绝缘电阻值: 1000MΩ Min. @ 500 VDC
Dielectric Strength 电介质强度: 1000 VAC RMS 60Hz, 1 Min.

Material 物料规格:

Housing Material 塑胶外壳: High Temp Nylon UL94V-0, Black
Insert 插入: High Temp Nylon UL94V-0, Black
Contact Material 端子材料: Phosphor Bronze 0.35mm Thickness
Plating 电镀规格: Gold Plating over Nickel
Operating Life 使用寿命: 750 Cycles Min.
PCB Retention Force After Solder 焊接后保持力: 10 LBS Min.

Environmental 环境的:

Storage Temperature 储存温度: -40°C to +85°C
Operation Temperature 使用温度: -40°C to +85°C
IR Reflow Soldering Temperature 回流焊接温度: 255°C to 265°C, 5-10 seconds


Ordering Grid

MJ3305 - **88** - **X** - **X** Request Samples and Quotation

No. of Positions/ Positions Loaded
88=8/8

Mylar Film - for pick and place
A = Without
B = With (Standard)

Contact Plating
2 = 6μ" Gold (Standard)
4 = 30μ" Gold



Part Number			Product Description		
MJ3305 - 8 Position			Modular Jack Connector, 8 Position, Category 3, Vertical SMT, Low Profile, With Solder Tab, Without PCB Peg		
Drawing Date					
11th May 2010					
By	AJO	Tolerances (Except as Noted)		Units:	This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE
Detail	MJ3305-8 B PCN	Length	Angle	Metric (mm)	
Revision	B	X.X ± 0.20	± 5°		
Date	15/06/12	X.XX ± 0.15			
		X.XXX ± 0.10			
RoHS COMPLIANT 2011/65/EU Deca-SOE ©					



www.gct.co

Not to Scale

Drawn By PKN


Sheet No. 1/2

GCT
www.gct.co

1. Packing Material 包材 - Tape Reel

Quantity 數量 - 1*150=150 PCS


Tape Reel 卷帶 - Width 44 * Depth 15.7 * Pitch 24 = Total Length 4.1m
Reel 卷盤 - ø380mm

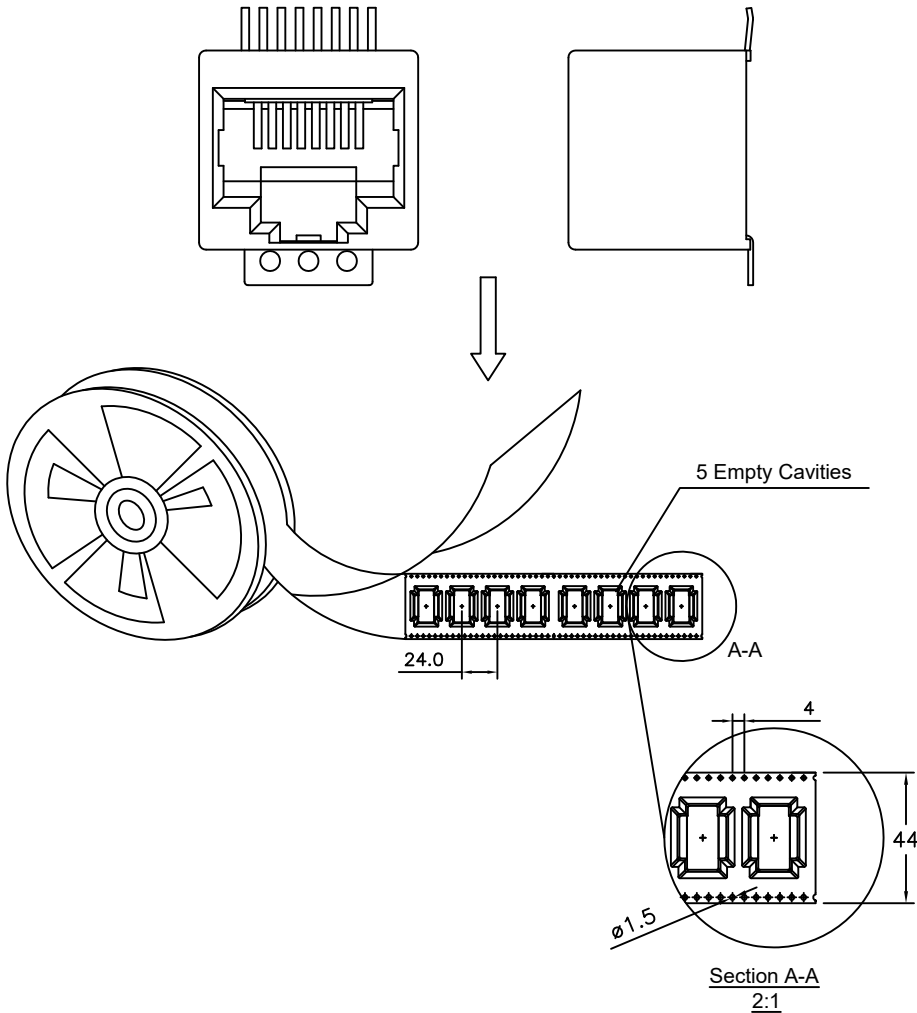

2. Packing Material 包材 - Carton 1 PC

Quantity 數量 - 150*6=900 PCS

Part Number 零部件料号	Net Weight 淨重	Gross Weight 毛重	Q'TY 數量
MJ3305-88-X-X	7.00Kg	7.50Kg	900

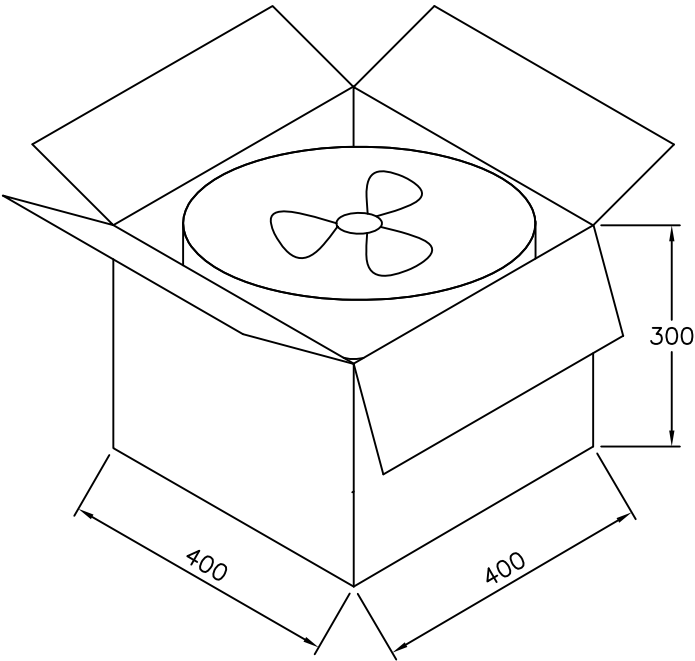

Part Number		Product Description			 www.gct.co
MJ3305 - 8 Position		Modular Jack Connector, 8 Position, Category 3, Vertical			
Drawing Date		SMT, Low Profile, With Solder Tab, Without PCB Peg			
11th May 2010					
By	AJO	Tolerances (Except as Noted) Length Angle		Units: Metric (mm)	 RoHS COMPLIANT 2011/65/EU Deca-SDE
Detail	MJ3305-8 B PCN				
Revision	B	Length Angle		 3rd Angle Projection	
Date	15/06/12				
This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE					 ©
Not to Scale		Drawn By PKN		Sheet No. 2/2	