


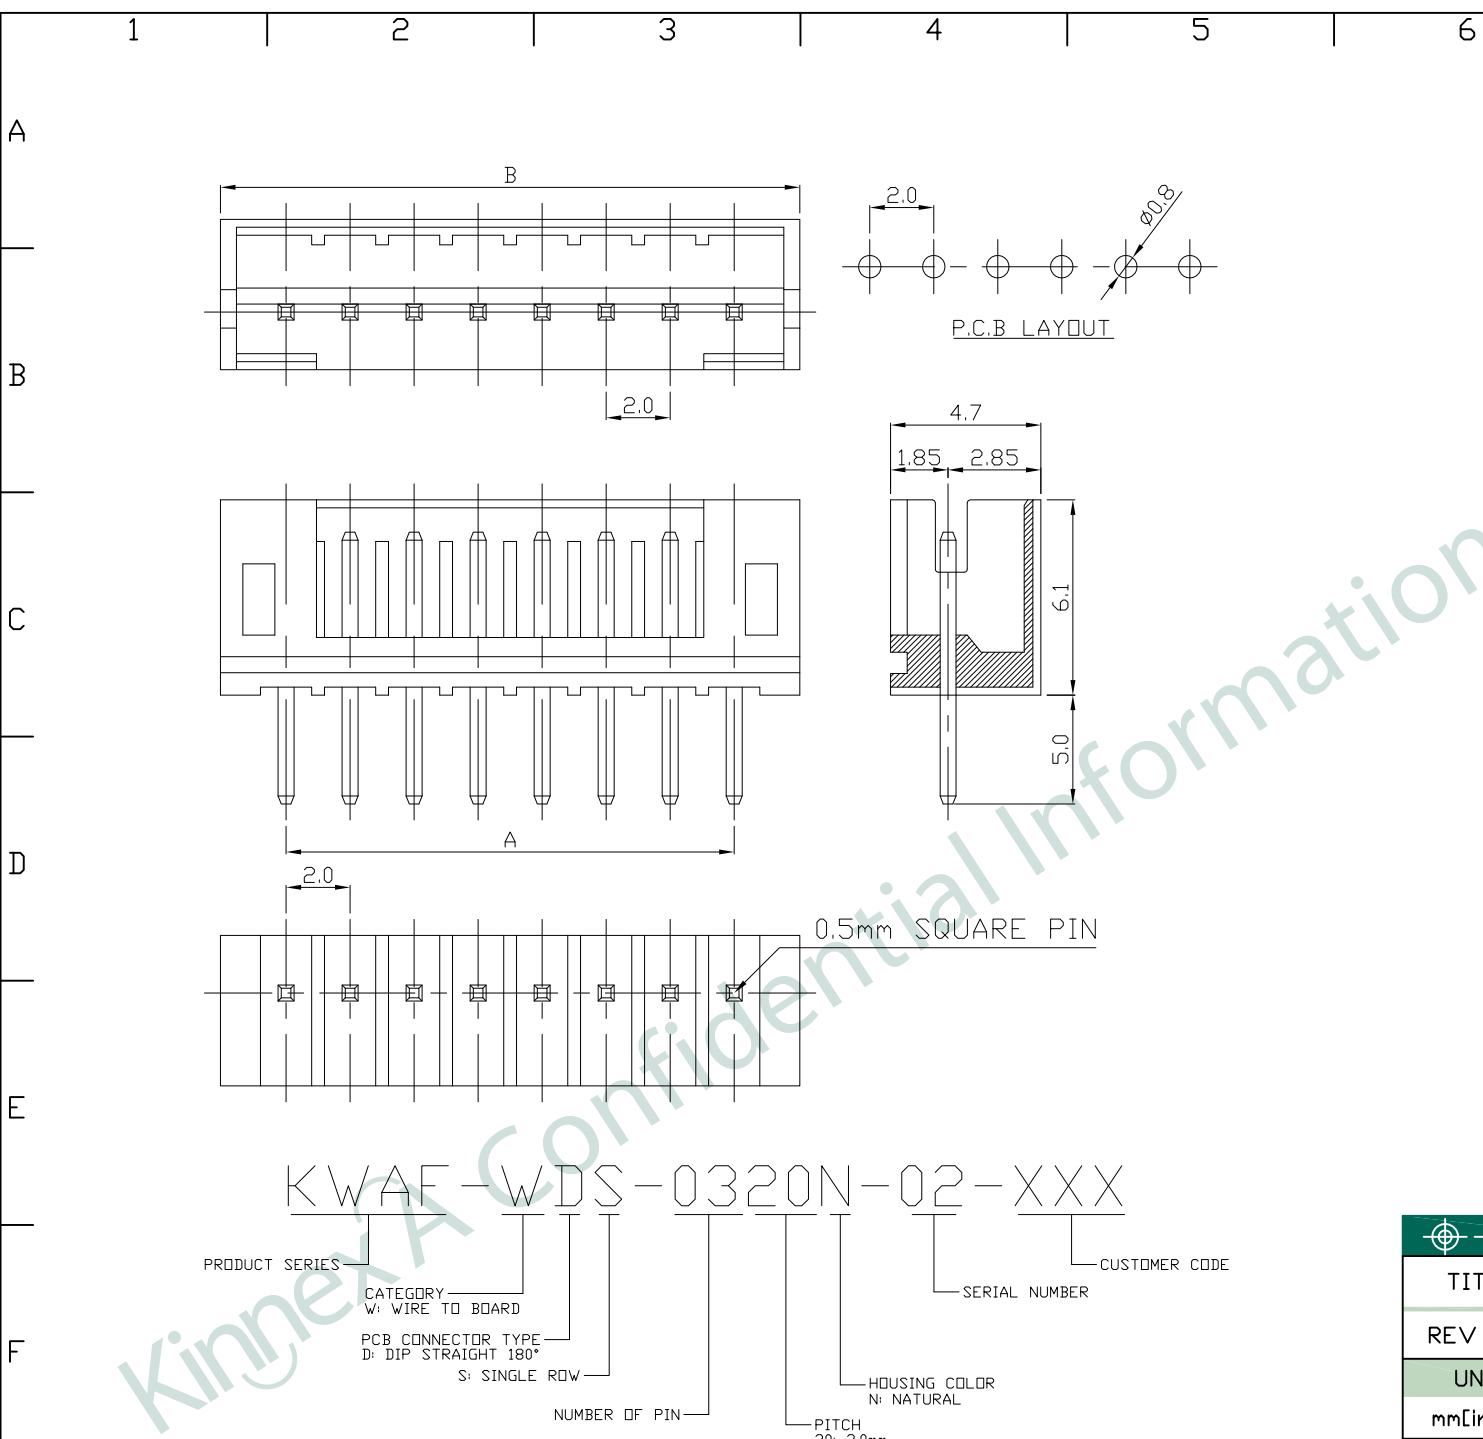

REV.	DATE	DESCRIPTION
01	Jun. 08, '20	1st RELEASE

Specifications

Electrical

Voltage Rating: 100V(AC)
Current Rating: 2A
Contact Resistance: 20mΩ max.
Dielectric Withstandeig Voltage: 800V AC/1min.
Insulation Resistance: 1000MΩ min.


Material

Circuits: 2~16
Insulator: Nylon 66 UL 94V-0
Color: White or Natural
Contact: Brass 0.50mm(0.20") Square Pin
Plating: Tin Plated
Temperature Range: -25° C~+85° C
Applicable PC Board Thickness: 0.8 to 1.6mm

Poles	Dimension mm (in.)	
	A	B
02	2.0(0.079)	6.1(0.240)
03	4.0(0.157)	8.1(0.318)
04	6.0(0.236)	10.1(0.397)
05	8.0(0.315)	12.1(0.476)
06	10.0(0.394)	14.1(0.555)
07	12.0(0.472)	16.1(0.634)
08	14.0(0.551)	18.1(0.713)
09	16.0(0.630)	20.1(0.791)
10	18.0(0.709)	22.1(0.870)
11	20.0(0.787)	24.1(0.949)
12	22.0(0.886)	26.1(1.028)
13	24.0(0.945)	28.1(1.106)
14	26.0(1.024)	30.1(1.185)
15	28.0(1.102)	32.1(1.263)
16	30.0(1.181)	34.1(1.343)

PART NO K WAF-WDS-0320N-02-XXX				
TITLE	WIRE TO BOARD, DIP STRAIGHT 180°, SINGLE ROW, PITCH=2.0mm, 3PIN			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	VINCENT	Jun. 08, '20	1 of 2

ROHS Compliant

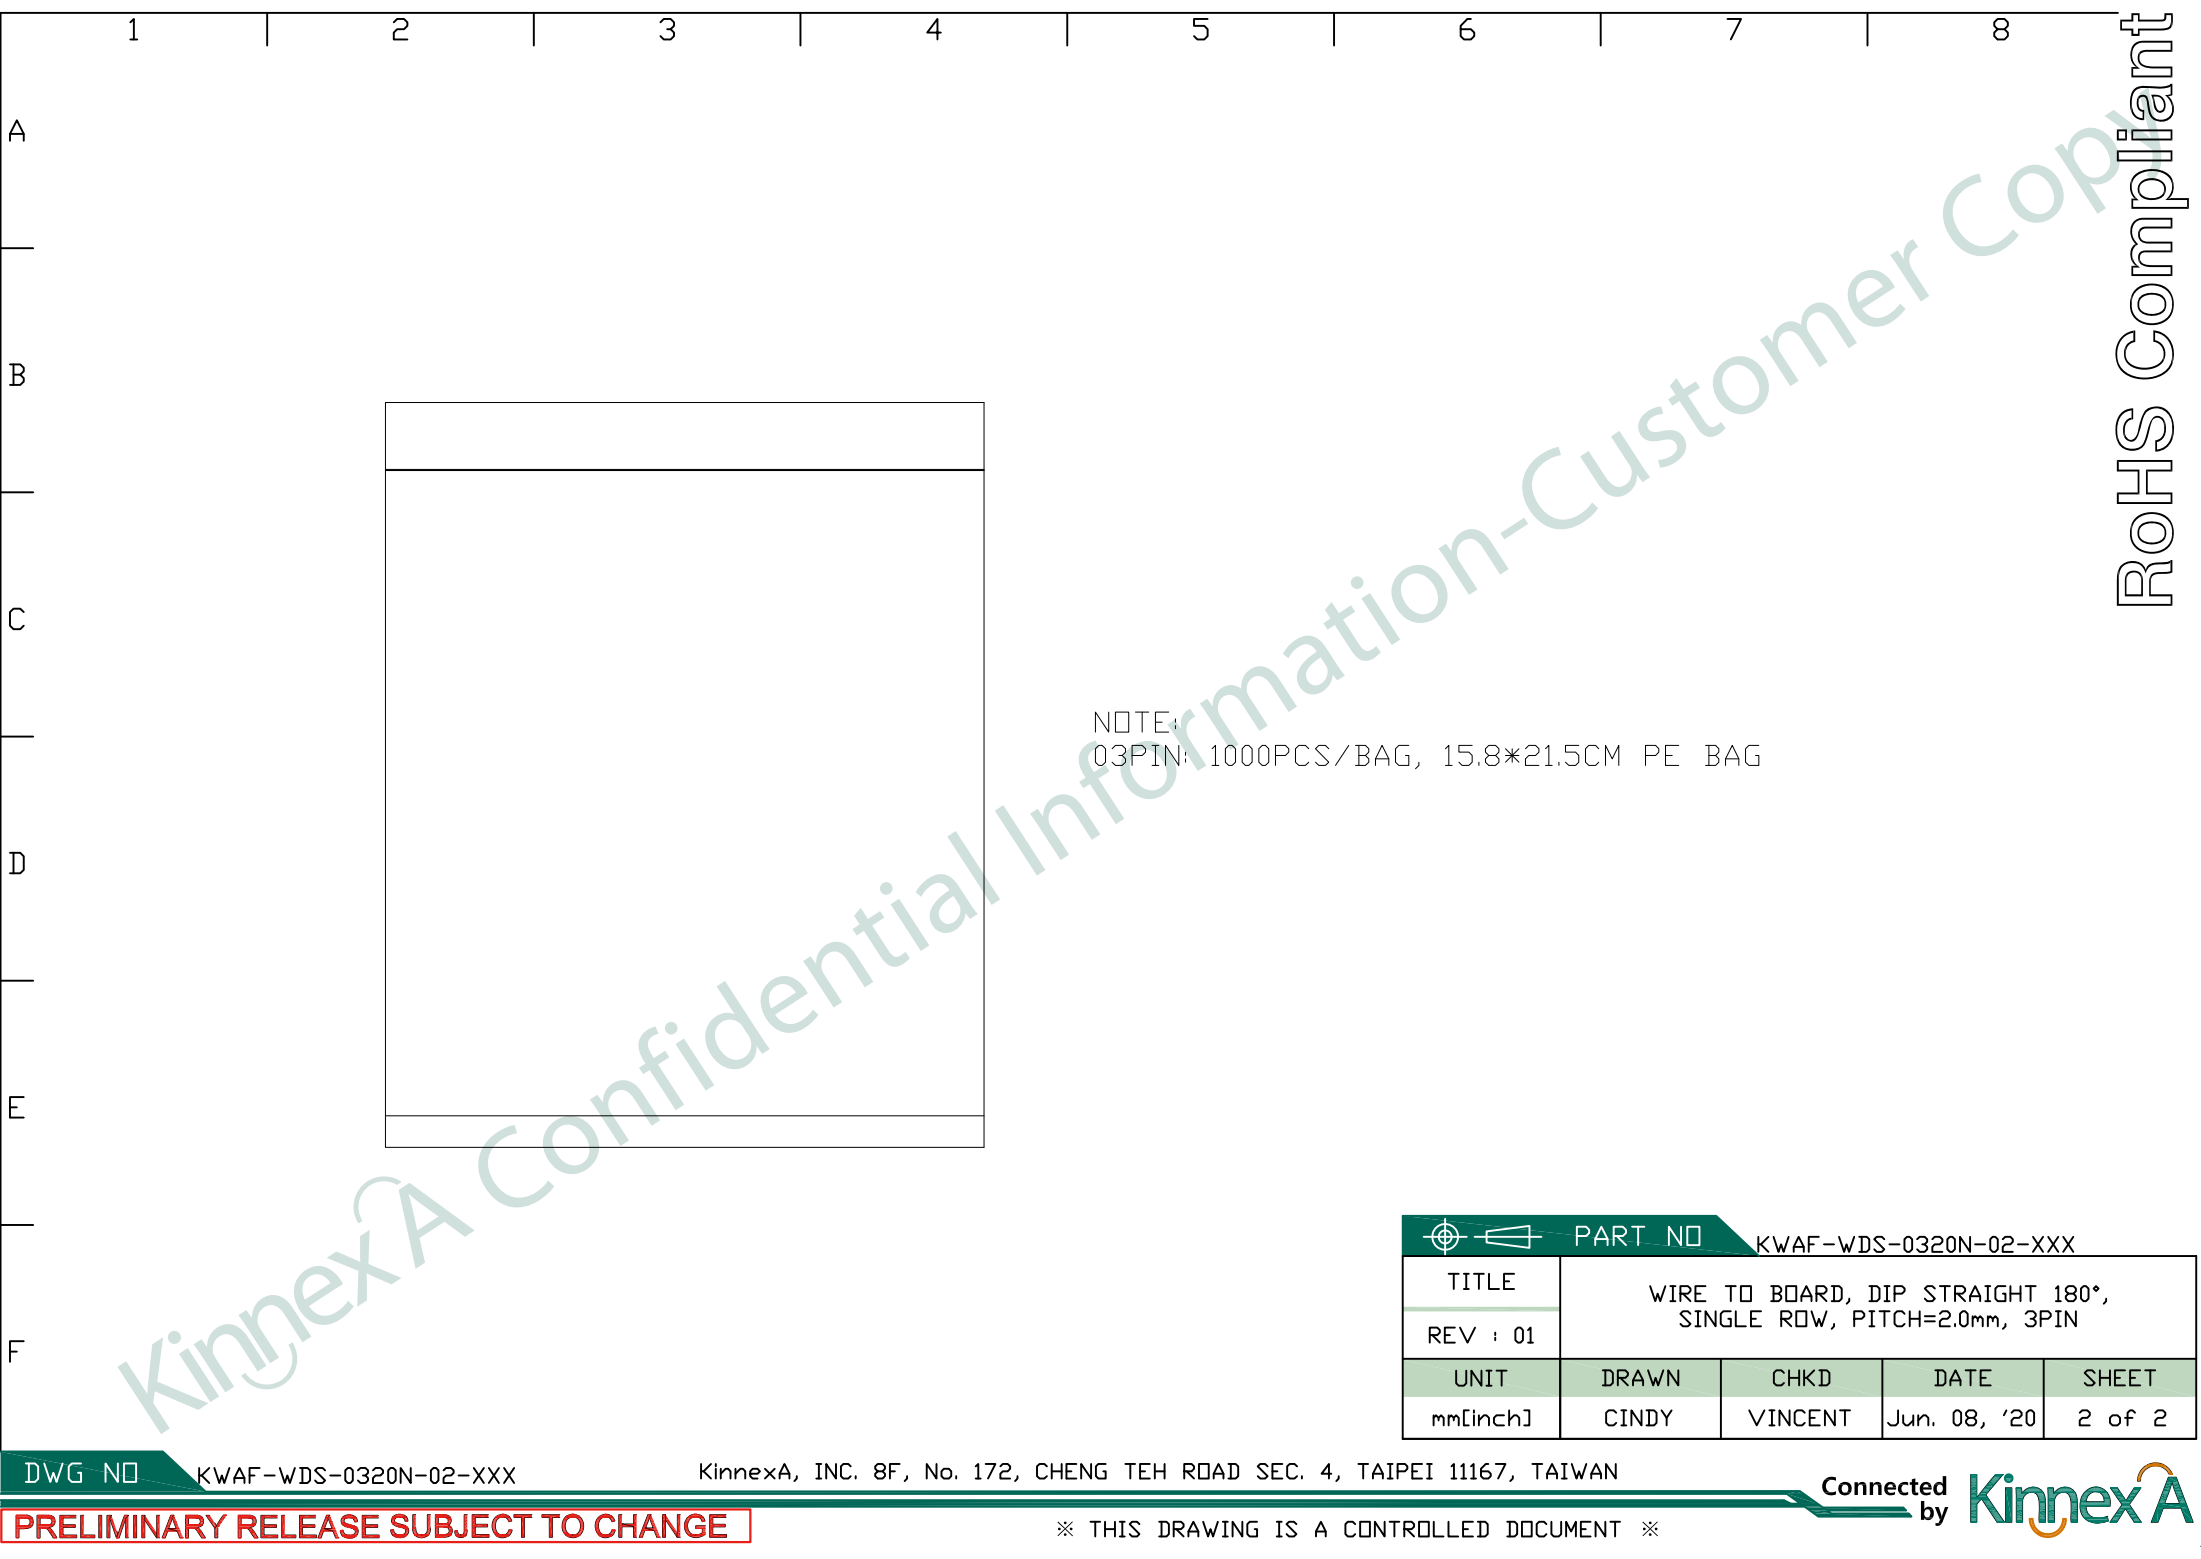

NOTE:
03PIN: 1000PCS/BAG, 15.8*21.5CM PE BAG

RoHS Compliant

 PART NO KWAF-WDS-0320N-02-XXX				
TITLE	WIRE TO BOARD, DIP STRAIGHT 180°, SINGLE ROW, PITCH=2.0mm, 3PIN			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	VINCENT	Jun. 08, '20	2 of 2