

ARV11NM-4497




- ### Electrical Specifications @ 25°C


Voltage Rating (VAC RMS)	Current Rating (Amp)	Contact Resistance (Max)	Insulation Resistance (Min @ 500 VDC)	Dielectric Strength 50Hz / 60Sec
125	1.5	50mΩ	500MΩ	500VAC RMS

MECHANICAL

Technical drawing of the top view of a 16-pin D-sub connector. The drawing shows a rectangular housing with 16 pins arranged in two rows of 8. Dimensions are given in millimeters (mm) and inches (in). Key dimensions include: overall width 63.0 mm (1.600 in), overall height 66.1 mm (1.680 in), pin pitch 2.54 mm (0.1 in), and individual pin dimensions. The drawing is labeled '16P' and 'D-SUB'.

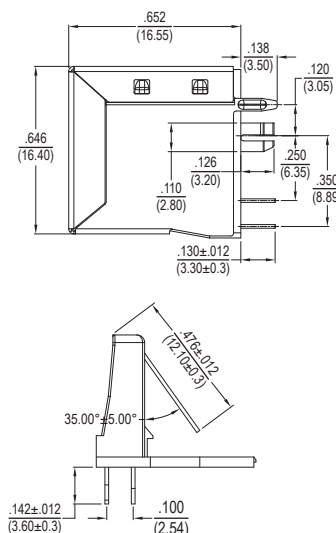

PCB LAYOUT

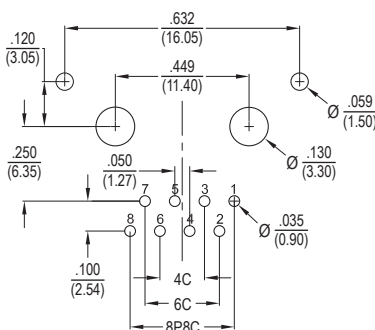

NOTES

- REVISÉD 11/04/2019