
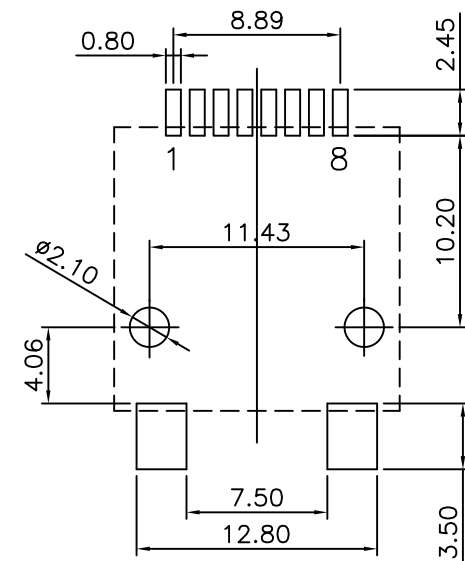
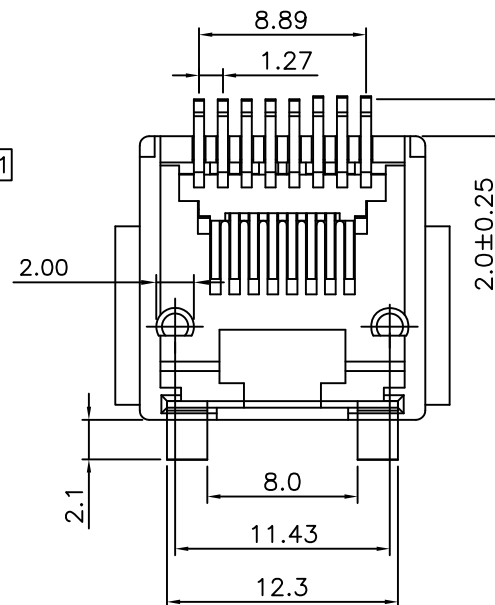


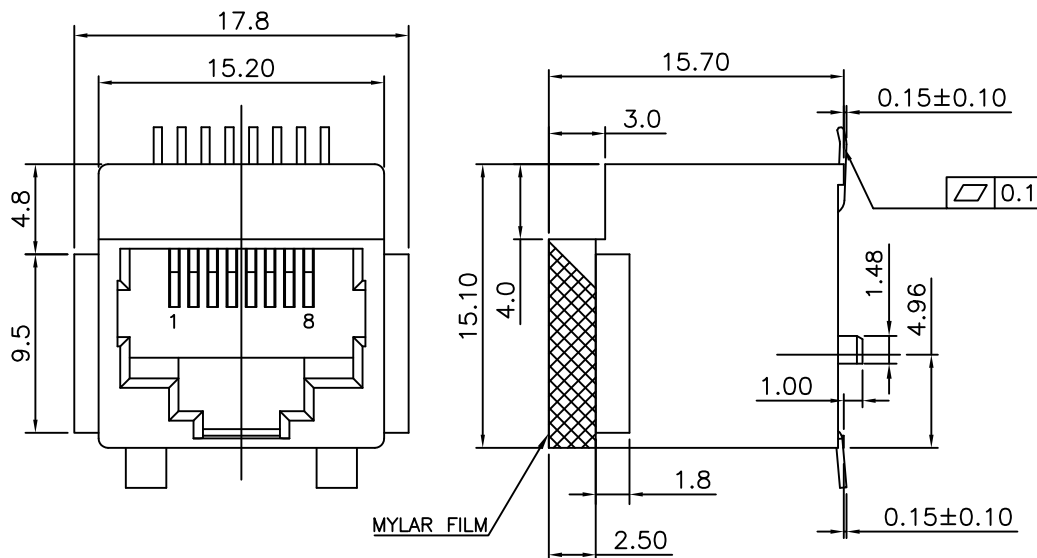

RECOMMENDED PCB LAYOUT
AS VIEWED FROM COMPONENT SIDE

Specification 规格:

Electrical 电气规格:

Voltage Rating 电压额定值: 125 V AC (RMS)

Current Rating 电流额定值: 1.5 Amp

Contact Resistance 接触电阻值: 35mΩ Max.

Insulation Resistance 绝缘电阻值: 1000MΩ Min. @ 500 VDC

Dielectric Strength: 1000 VAC RMS 60Hz, 1 Min.

Material 物料规格:

Housing Material 塑胶外壳: Hi-Temp Thermoplastic UL94V-0, Black

Contact Material: Phosphor Bronze t=0.35mm

Plating 电镀规格: Gold Plating over Nickel

Operating Life: 750 Cycles Min.

PCB Retention Post Solder: 10 LBS Min.

Environmental:

Storage: -40°C to +85°C

Operation: -40°C to +85°C

IR Reflow Soldering Temperature: 255°C to 265°C, 5-10 seconds

Ordering Grid

MJ3310 - 88 - X - X Request Samples and Quotation

No. of Positions/
Positions Loaded
88 = 8/8

Mylar Film - for pick and place

A = Without


B = With (Standard)

Contact Plating

2 = 6μ" Gold (Standard)

4 = 30μ" Gold

5 = 50μ" Gold

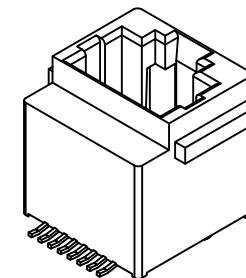

Part Number		Product Description	
MJ3310 - 8 Position		Modular Jack Connector, 8 Position, Category 3, Vertical	
Drawing Date		SMT, Standard Profile, With Solder Tab, With PCB Peg	
12th May 2010			
By	PKN	Tolerances (Except as Noted)	Units:
Detail	Drawing Release	Length X.X ± 0.20 X.XX ± 0.15 X.XXX ± 0.10	Metric (mm)
Revision	A	Angle ± 5°	3rd Angle Projection
Date	11/05/10		

RoHS COMPLIANT
2011/65/EU
Deca-BDE

This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT).
This drawing must not be copied or disclosed without written consent. E & OE

Not to Scale

Drawn By
PKN

Sheet No.
1/2

GCT
www.gct.co

H

G

F

E



C

B

A

2. Packing Material 包材 - Carton 1 PC

Quantity 數量 - 150*6=900 PCS

Technical drawing of a square box with a circular lid and a three-bladed propeller inside. The box has a height of 300 and a side length of 400. The lid is circular with a diameter of 400. A three-bladed propeller is centered on the lid.

GCT
www.gct.co