
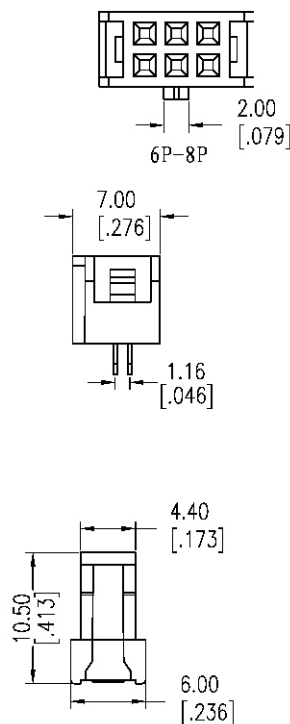


LAT-CON SOCKET, Series 050, 2,54mm, IDC

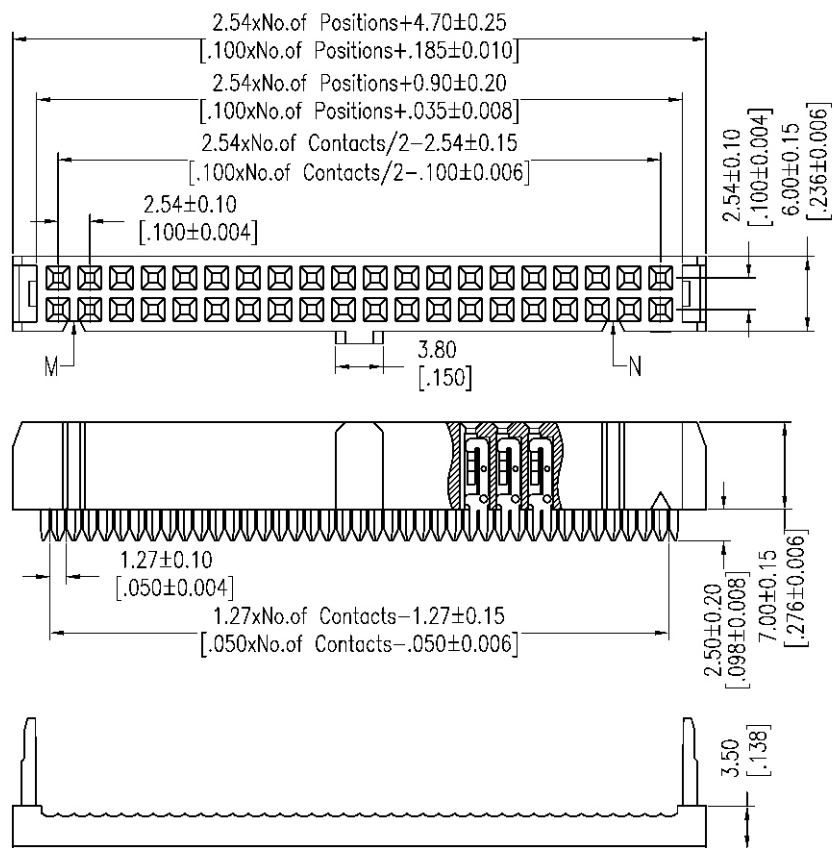


ORDERING INFORMATION	
CONNECTOR	STRAIN RELIEF
CIRCUIT	CIRCUIT
050-0 06 -435A_E	050-000-0 06_E
050-0 10 -435A_E	050-000-0 10_E
050-0 14 -435A_E	050-000-0 14_E
050-0 16 -435A_E	050-000-0 16_E
050-0 20 -435A_E	050-000-0 20_E
050-0 26 -435A_E	050-000-0 26_E
050-0 34 -435A_E	050-000-0 34_E
050-0 40 -435A_E	050-000-0 40_E
050-0 50 -435A_E	050-000-0 50_E
050-0 60 -435A_E	050-000-0 60_E
050-0 64 -435A_E	050-000-0 64_E

NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass Or Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

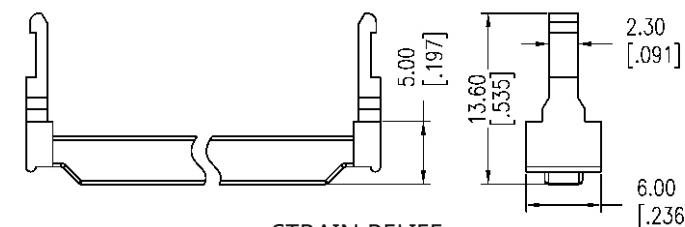

STRAIN RELIEF

REV	DATE	NOTE	NAME
1	26.11.2019	issued	LAD