



## SCREWDRIVERS

3C-SCREWDRIVER  
› 345



3C-SCREWDRIVER  
WITH STRIKING CAP  
› 350



SCREWDRIVER  
WITH WOODEN HANDLE  
› 351



ELECTRONIC  
SCREWDRIVER  
› 352



T-HANDLES  
› 354



HEXAGON ALLEN KEYS  
› 357




VARIOUS  
› 363



# GEDORE

## SCREWDRIVERS

powerful, unerring, absolute precision, wear-resistant

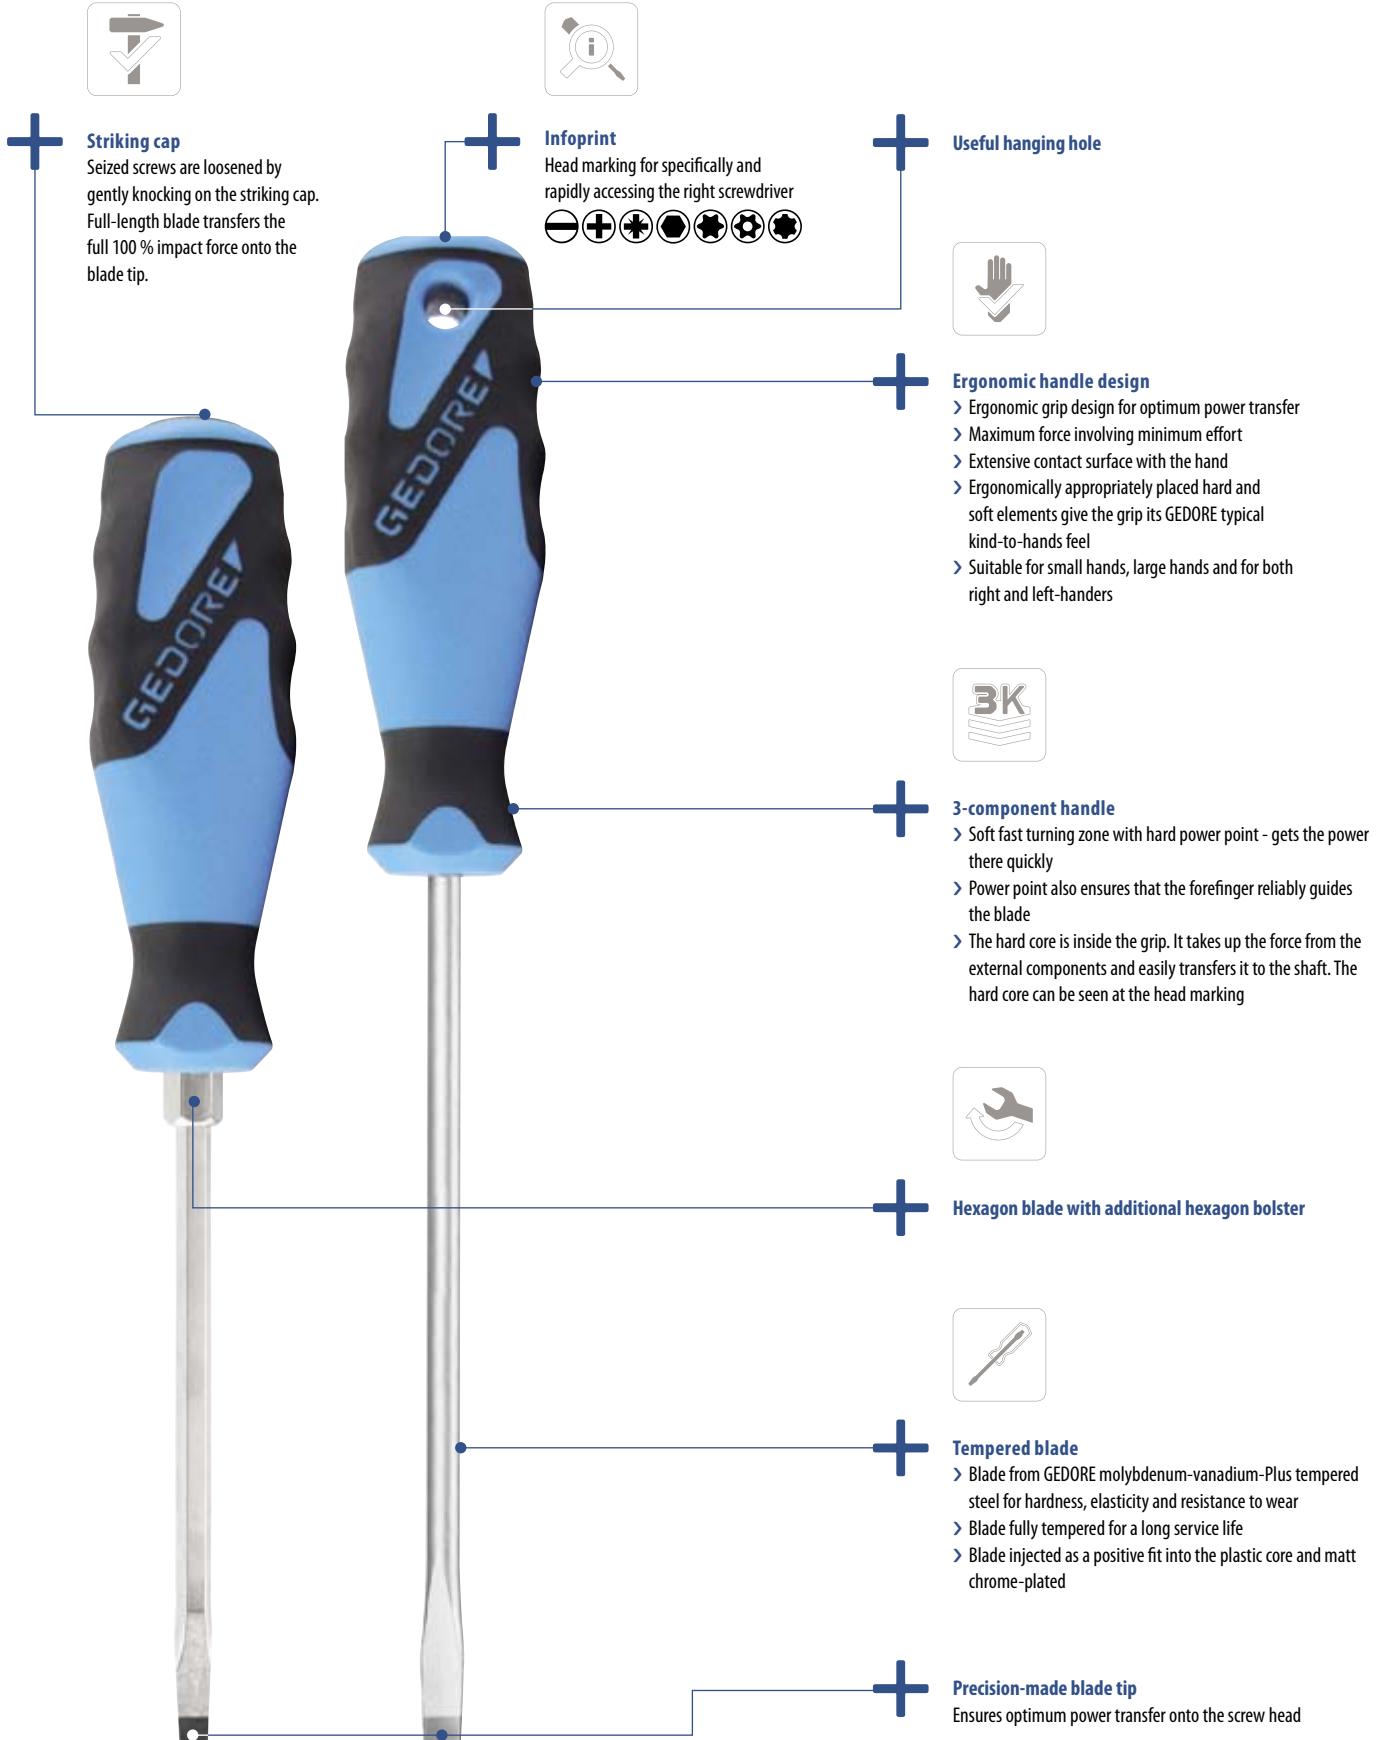

## 3C-SCREWDRIVER

### 2150 3C-SCREWDRIVER for slotted head screws

- › Acc. to DIN ISO 2380-2, blade tip acc. to DIN ISO 2380-1 Form A
  - › 3-component handles Power-Grip<sup>3</sup> with hanging hole
  - › Ergonomic handle design enables precise and fatigue-free working
  - › Positive-fit joint of handle and blade for optimum transmission of force
  - › Type of drive marked at end of the handle
  - › Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- \* Length not standardised



$\Theta$ mm	mm	mm	mm	$\varnothing$	$\frac{kg}{kg}$	Code	No.
<b>3.0</b>	0.5	80	*	165	3,0	0.039	6679270
<b>3.5</b>	0.6	75	160	3,5	0.055	2822644	2150 3,5
<b>4.0</b>	0.8	100	185	4,0	0.061	6679350	2150 4
<b>4.5</b>	0.8	90	*	190	4,0	0.100	2822652
<b>5.5</b>	1.0	100	200	5,0	0.093	6679430	2150 5,5
<b>6.5</b>	1.2	150	260	6,0	0.128	6679510	2150 6,5
<b>8.0</b>	1.2	150	270	7,0	0.170	6679780	2150 8
<b>8.0</b>	1.6	175	295	7,0	0.222	2822660	2150 8-175
<b>10.0</b>	1.6	200	320	8,0	0.203	6679860	2150 10
<b>10.0</b>	1.6	300	*	420	8,0	0.222	2822679
<b>12.0</b>	2.0	200	320	9,0	0.257	6679940	2150 12
<b>12.0</b>	2.0	250	370	9,0	0.222	2822687	2150 12-250

VDE 2170

&gt;575



### 2153 3C-SCREWDRIVER for slotted head screws, stubby

- › Acc. to DIN ISO 2380-2A, blade tip acc. to DIN ISO 2380-1 Form B
- › For confined spaces
- › 3-component handles Power-Grip<sup>3</sup> with hanging hole
- › Ergonomic handle design enables precise and fatigue-free working
- › Positive-fit joint of handle and blade for optimum transmission of force
- › Type of drive marked at end of the handle
- › Blade from GEDORE molybdenum-vanadium-Plus tempered steel



$\Theta$ mm	mm	mm	mm	$\frac{kg}{kg}$	Code	No.
<b>4.0</b>	0.8	25	81	0.031	1531174	2153 4
<b>5.5</b>	1.0	25	81	0.036	1482432	2153 5,5
<b>6.5</b>	1.2	25	81	0.039	1531182	2153 6,5
<b>8.0</b>	1.2	25	81	0.044	1531190	2153 8

### 2150 3C-SCREWDRIVER for slotted head screws, special lengths

- › Acc. to DIN ISO 2380-2, blade tip acc. to DIN ISO 2380-1 Form B
  - › 3-component handles Power-Grip<sup>3</sup> with hanging hole
  - › Ergonomic handle design enables precise and fatigue-free working
  - › Positive-fit joint of handle and blade for optimum transmission of force
  - › Type of drive marked at end of the handle
  - › Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- \* Length not standardised



$\Theta$ mm	mm	mm	mm	$\varnothing$	$\frac{kg}{kg}$	Code	No.	
<b>2.0</b>	0.4	60	*	145	2,0	0.055	2822695	2150 2-60
<b>2.5</b>	0.4	75	160	2,5	0.055	2822709	2150 2,5-75	
<b>3.0</b>	0.5	150	*	235	3,0	0.044	6680280	2150 3-150
<b>3.0</b>	0.5	200	*	285	3,0	0.055	2822717	2150 3-200
<b>3.5</b>	0.6	100	185	3,5	0.055	2822725	2150 3,5-100	
<b>3.5</b>	0.6	125	210	3,5	0.055	2822733	2150 3,5-125	
<b>3.5</b>	0.6	200	*	285	3,5	0.055	2822741	2150 3,5-200
<b>4.0</b>	0.8	150	*	235	4,0	0.069	6680360	2150 4-150
<b>4.0</b>	0.8	200	*	285	4,0	0.055	2822768	2150 4-200
<b>4.0</b>	0.8	300	*	385	4,0	0.055	2822776	2150 4-300
<b>5.5</b>	1.0	125	225	5,5	0.100	2822784	2150 5,5-125	
<b>5.5</b>	1.0	150	250	5,5	0.104	6680520	2150 5,5-150	
<b>5.5</b>	1.0	200	*	300	5,5	0.100	2822792	2150 5,5-200
<b>5.5</b>	1.0	300	*	400	5,5	0.100	2822806	2150 5,5-300
<b>6.0</b>	1.2	100	*	210	6,0	0.140	2822814	2150 6-100
<b>6.5</b>	1.2	200	*	310	6,0	0.152	6680870	2150 6,5-200



### 2160 PH 3C-SCREWDRIVER for cross-head screws PH

for cross-head screws PH

- › Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PH
  - › 3-component handles Power-Grip<sup>3</sup> with hanging hole
  - › Ergonomic handle design enables precise and fatigue-free working
  - › Positive-fit joint of handle and blade for optimum transmission of force
  - › Type of drive marked at end of the handle
  - › Size 3 and 4 blade with hexagon bolster
  - › Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- \* not standardised



$\Theta$ PH	M	mm	mm	$\frac{kg}{kg}$	Code	No.	
<b>0</b>	M1,6 - M2	60	145	0.302	6683110	2160 PH 0	
<b>0</b>	M1,6 - M2	100	*	185	0.055	2824043	2160 PH 0-100
<b>1</b>	M2 - M3	80	180	0.080	6683380	2160 PH 1	
<b>1</b>	M2 - M3	100	*	200	0.100	2824051	2160 PH 1-100
<b>1</b>	M2 - M3	200	300	0.166	6683700	2160 PH 1-200	
<b>2</b>	M3,5 - M5	100	210	0.119	6683460	2160 PH 2	
<b>2</b>	M3,5 - M5	150	*	260	0.140	2824078	2160 PH 2-150
<b>2</b>	M3,5 - M5	200	310	0.164	6683890	2160 PH 2-200	
<b>3</b>	M5,5 - M7	150	270	0.192	6683540	2160 PH 3	
<b>4</b>	M8 - M10	200	320	0.274	6683620	2160 PH 4	

## 2161 PH 3C-SCREWDRIVER

for cross-head screws PH, stubby

- Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PH
- For confined spaces
- 3-component handles Power-Grip<sup>3</sup> with hanging hole
- Ergonomic handle design enables precise and fatigue-free working
- Positive-fit joint of handle and blade for optimum transmission of force
- Type of drive marked at end of the handle
- Blade from GEDORE molybdenum-vanadium-Plus tempered steel



∅ PH	M	l-mm	l-mm	G kg	Code	No.
1	M2 - M3	25	81	0.033	1482440	2161 PH 1
2	M3,5 - M5	25	81	0.036	1531204	2161 PH 2

## 2161 PZ 3C-SCREWDRIVER

for cross-head screws Pozi PZ, stubby

- Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PZ
- For confined spaces
- 3-component handles Power-Grip<sup>3</sup> with hanging hole
- Ergonomic handle design enables precise and fatigue-free working
- Positive-fit joint of handle and blade for optimum transmission of force
- Type of drive marked at end of the handle
- Blade from GEDORE molybdenum-vanadium-Plus tempered steel



∅ PZ	M	l-mm	l-mm	G kg	Code	No.
1	M2 - M3	25	81	0.032	1550608	2161 PZ 1
2	M3,5 - M5	25	81	0.037	1550616	2161 PZ 2

## 2163 K 3C-SCREWDRIVER

for in-hex screws, with ball end

- 3-component handles Power-Grip<sup>3</sup> with hanging hole
- Ergonomic handle design enables precise and fatigue-free working
- Positive-fit joint of handle and blade for optimum transmission of force
- Type of drive marked at end of the handle
- Working angle approx. 25° in each direction
- Blade from GEDORE molybdenum-vanadium-Plus tempered steel



∅ mm	l-mm	l-mm	G kg	Code	No.
2	100	185	0.040	1828746	2163 K 2
3	100	185	0.045	6684430	2163 K 3
4	100	185	0.068	6684510	2163 K 4
5	100	200	0.100	6684780	2163 K 5
6	125	235	0.139	6684860	2163 K 6
8	150	270	0.230	6684940	2163 K 8
10	150	270	0.285	6685080	2163 K 10
12	150	270	0.369	6685160	2163 K 12

## 2160 PZ 3C-SCREWDRIVER

for cross-head screws Pozi PZ

- Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PZ
- 3-component handles Power-Grip<sup>3</sup> with hanging hole
- Ergonomic handle design enables precise and fatigue-free working
- Positive-fit joint of handle and blade for optimum transmission of force
- Type of drive marked at end of the handle
- Size 3 and 4 blade with hexagon bolster
- Blade from GEDORE molybdenum-vanadium-Plus tempered steel

\* not standardised



∅ PZ	M	l-mm	l-mm	G kg	Code	No.
0	M1,6 - M2	60	145	0.038	6683970	2160 PZ 0
1	M2 - M3	80	180	0.079	6684000	2160 PZ 1
1	M2 - M3	300	*	0.100	2824086	2160 PZ 1-300
2	M3,5 - M5	100	210	0.119	6684190	2160 PZ 2
2	M3,5 - M5	300	*	0.140	2824094	2160 PZ 2-300
3	M5,5 - M7	150	270	0.189	6684270	2160 PZ 3
4	M8 - M10	200	320	0.273	6684350	2160 PZ 4

## 2163 TX 3C-SCREWDRIVER

for recessed TORX® head screws

- 3-component handles Power-Grip<sup>3</sup> with hanging hole
- Ergonomic handle design enables precise and fatigue-free working
- Positive-fit joint of handle and blade for optimum transmission of force
- Type of drive marked at end of the handle
- Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



∅	M	★ mm	l-mm	l-mm	G kg	Code	No.
T5	M1,8	1,42	60	145	0.037	1616471	2163 TX T5
T6	M2	1,69	60	145	0.029	6685400	2163 TX T6
T7	M2,5	1,99	60	145	0.038	6685590	2163 TX T7
T8	M2,5	2,31	60	145	0.038	6685670	2163 TX T8
T9	M3	2,50	60	145	0.038	6685750	2163 TX T9
T10	M3 - M3,5	2,74	80	165	0.039	6685830	2163 TX T10
T15	M3,5 - M4	3,27	80	165	0.054	6685910	2163 TX T15
T20	M4 - M5	3,86	100	185	0.060	6686050	2163 TX T20
T25	M4,5 - M5	4,43	100	200	0.082	6686130	2163 TX T25
T27	M4,5 - M6	4,99	115	215	0.098	6686210	2163 TX T27
T30	M6 - M7	5,52	115	225	0.123	6686480	2163 TX T30
T40	M7 - M8	6,65	130	240	0.144	6686560	2163 TX T40
T45	M8 - M10	7,82	130	250	0.176	6686640	2163 TX T45

## 2163 KTX 3C-SCREWDRIVER

for recessed TORX® screws, with ball end

- 3-component handles Power-Grip<sup>3</sup> with hanging hole
- Ergonomic handle design enables precise and fatigue-free working
- Positive-fit joint of handle and blade for optimum transmission of force
- Type of drive marked at end of the handle
- Working angle approx. 25° in each direction
- Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



∅	■ M	★ mm	L mm	L mm	G kg	Code	No.
<b>T10</b>	M3 - M3,5	2,74	80	165	0.055	2824213	2163 KTX T10
<b>T15</b>	M3,5 - M4	3,27	80	165	0.055	2824221	2163 KTX T15
<b>T20</b>	M4 - M5	3,86	100	185	0.055	2824248	2163 KTX T20
<b>T25</b>	M4,5 - M5	4,43	100	200	0.100	2824256	2163 KTX T25
<b>T27</b>	M4,5 - M6	4,99	115	215	0.100	2824264	2163 KTX T27
<b>T30</b>	M6 - M7	5,52	115	225	0.140	2824272	2163 KTX T30
<b>T40</b>	M7 - M8	6,65	130	240	0.140	2824280	2163 KTX T40

## 2163 TXIP 3C-SCREWDRIVER

for recessed TORX PLUS® head screws

- 3-component handles Power-Grip<sup>3</sup> with hanging hole
- Ergonomic handle design enables precise and fatigue-free working
- Positive-fit joint of handle and blade for optimum transmission of force
- Type of drive marked at end of the handle
- Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- TORX PLUS® = reg. trademark of Acument Intellectual Properties, LLC. USA



∅	■ M	★ mm	L mm	L mm	G kg	Code	No.
<b>6IP</b>	M2	2,31	60	145	0.055	2824299	2163 TX 6IP
<b>7IP</b>	-	60	145	0.055	2824302	2163 TX 7IP	
<b>8IP</b>	M2,5 - M3	2,50	60	145	0.055	2824310	2163 TX 8IP
<b>9IP</b>	-	60	145	0.055	2824329	2163 TX 9IP	
<b>10IP</b>	M3 - M3,5	2,74	80	165	0.055	2824337	2163 TX 10IP
<b>15IP</b>	M3,5 - M4	3,27	80	165	0.055	2824345	2163 TX 15IP
<b>20IP</b>	M4 - M5	3,86	100	185	0.055	2824353	2163 TX 20IP
<b>25IP</b>	M4,5 - M5	4,43	100	200	0.100	2824361	2163 TX 25IP
<b>27IP</b>	M5 - M6	4,99	115	215	0.100	2824388	2163 TX 27IP
<b>30IP</b>	M6	5,52	115	225	0.140	2824396	2163 TX 30IP
<b>40IP</b>	M7 - M8	6,65	130	240	0.140	2824418	2163 TX 40IP

VDE 2133

➤ 572



## 2163 TXB 3C-SCREWDRIVER

for recessed TORX® head screws with pilot

- 3-component handles Power-Grip<sup>3</sup> with hanging hole
- Ergonomic handle design enables precise and fatigue-free working
- Positive-fit joint of handle and blade for optimum transmission of force
- Type of drive marked at end of the handle
- Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA




∅	■ M	★ mm	L mm	L mm	G kg	Code	No.
<b>T7</b>	M2,5	1,99	60	145	0.034	6677570	2163 TXB T7
<b>T8</b>	M2,5	2,31	60	145	0.038	6677650	2163 TXB T8
<b>T9</b>	M3	2,50	60	145	0.038	6677730	2163 TXB T9
<b>T10</b>	M3 - M3,5	2,74	80	165	0.039	6677810	2163 TXB T10
<b>T10</b>	M3 - M3,5	2,74	300	385	0.055	2824159	2163 TXB T10-300
<b>T15</b>	M3,5 - M4	3,27	80	165	0.054	6678030	2163 TXB T15
<b>T15</b>	M3,5 - M4	3,27	300	385	0.055	2824167	2163 TXB T15-300
<b>T20</b>	M4 - M5	3,86	100	185	0.060	6678110	2163 TXB T20
<b>T20</b>	M4 - M5	3,86	300	385	0.055	2824175	2163 TXB T20-300
<b>T25</b>	M4,5 - M5	4,43	100	200	0.082	6678380	2163 TXB T25
<b>T27</b>	M4,5 - M6	4,99	115	215	0.098	6678460	2163 TXB T27
<b>T30</b>	M6 - M7	5,52	115	225	0.123	6678540	2163 TXB T30
<b>T40</b>	M7 - M8	6,65	130	240	0.143	6678620	2163 TXB T40

## 2133 NUT DRIVER WITH 3C-HANDLE

- Acc. to DIN 3125, ISO 2725-1
- 3-component handles Power-Grip<sup>3</sup> with hanging hole
- Ergonomic handle design enables precise and fatigue-free working
- Positive-fit joint of handle and blade for optimum transmission of force
- Head depth 25 mm, blade length 125 mm
- 10 mm and larger with hexagon bolster
- Blade from GEDORE molybdenum-vanadium-Plus steel



∅ mm	L <sub>1</sub>	L <sub>2</sub>	d	Ø	∅ mm	G kg	Code	No.
<b>5,0</b>	225	125	8,0	5	-	0,097	1746723	2133 5
<b>5,5</b>	225	125	8,0	5	-	0,107	1746731	2133 5,5
<b>6,0</b>	225	125	9,0	5	-	0,109	1746758	2133 6
<b>7,0</b>	235	125	11,0	6	-	0,135	1746766	2133 7
<b>8,0</b>	235	125	12,0	6	-	0,152	1746855	2133 8
<b>9,0</b>	235	125	13,0	6	-	0,168	1746863	2133 9
<b>10,0</b>	245	125	14,0	6	10	0,198	1746898	2133 10
<b>11,0</b>	245	125	16,0	8	13	0,202	1746901	2133 11
<b>12,0</b>	245	125	17,0	8	13	0,221	1746928	2133 12
<b>13,0</b>	245	125	18,0	8	13	0,225	1746944	2133 13

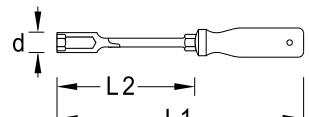

## 3C-SCREWDRIVER SETS


### 2150-2160 PH 3C-SCREWDRIVER SET

6 pieces / 10 pieces

- > Practical set composition in environmentally-friendly cardboard box
- > For slotted and cross-head screws PH
- > 3-component handles Power-Grip<sup>3</sup> with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel



2150-2160 PH-06

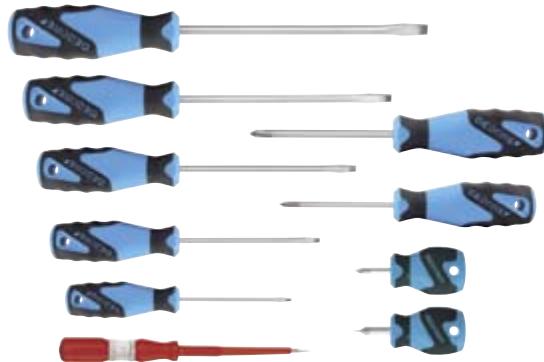

2150-2160 PH-010

Contents	$\frac{N}{m}$	Code	No.
⊖ 2150 4 5,5 6,5 8	0.660	1482319	2150-2160 PH-06
⊕ 2160 PH 1 2			


Contents	$\frac{N}{m}$	Code	No.
⊖ 2150 3 4 5,5 6,5 8	0.825	1482343	2150-2160 PH-010
⊖ 2153 5,5			
⊕ 2160 PH 1 2			
⊕ 2161 PH 1			
⊖ 4615 3,5			

### 2160 PHZ-06 3C-SCREWDRIVER SET

6 pieces


- > Practical set composition in environmentally-friendly cardboard box
- > For cross-head screws PH and Pozi PZ
- > 3-component handles Power-Grip<sup>3</sup> with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel

Contents	$\frac{N}{m}$	Code	No.
⊕ 2160 PH 0 1 2	0.344	2003589	2160 PHZ-06
⊕ 2160 PZ 0 1 2			

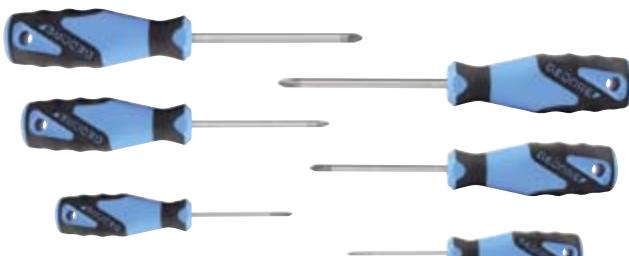


VDE 2170-2160 PH-077

&gt;579

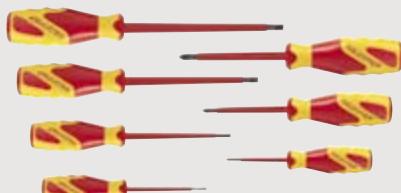

VDE 2162-2172 PM-06

&gt;577

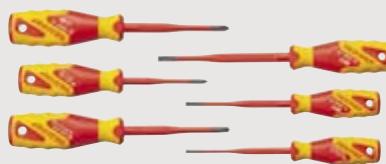

## 2150-2160 PZ-06 3C-SCREWDRIVER SET

6 pieces

- › Practical set composition in environmentally-friendly cardboard box
- › For slotted and cross-head screws Pozi PZ
- › 3-component handles Power-Grip<sup>3</sup> with hanging hole
- › Ergonomic handle design enables precise and fatigue-free working
- › Positive-fit joint of handle and blade for optimum transmission of force
- › Type of drive marked at end of the handle
- › Blade from GEDORE molybdenum-vanadium-Plus tempered steel




Contents	$\frac{kg}{set}$	Code	No.
∅ 2150 4 5,5 6,5 8	0.670	1482300	2150-2160 PZ-06
⊕ 2160 PZ 1 2			

## 2163 TXB-05 3C-SCREWDRIVER SET

5 pieces

- › Practical set composition in environmentally-friendly cardboard box
- › For recessed TORX® head screws with pilot
- › 3-component handles Power-Grip<sup>3</sup> with hanging hole
- › Ergonomic handle design enables precise and fatigue-free working
- › Positive-fit joint of handle and blade for optimum transmission of force
- › Type of drive marked at end of the handle
- › Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- › TORX® = reg. trademark of Acument Intellectual Properties, LLC, USA

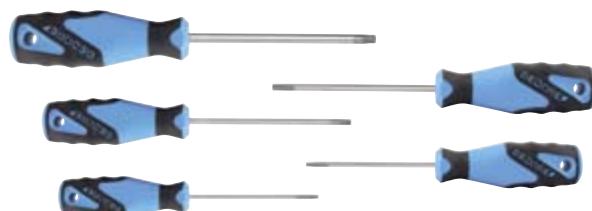

Contents	$\frac{kg}{set}$	Code	No.
∅ 2163 TXB T10 T15 T20 T25 T30	0.440	1616617	2163 TXB-05


## 2163 TX 3C-SCREWDRIVER SET

5 pieces / 10 pieces

- › Practical set composition in environmentally-friendly cardboard box
- › For recessed TORX® head screws
- › 3-component handles Power-Grip<sup>3</sup> with hanging hole
- › Ergonomic handle design enables precise and fatigue-free working
- › Positive-fit joint of handle and blade for optimum transmission of force
- › Type of drive marked at end of the handle
- › Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- › TORX® = reg. trademark of Acument Intellectual Properties, LLC, USA



2163 TX-05

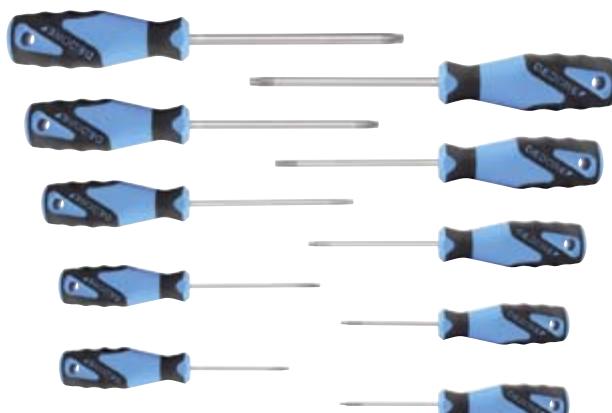

2163 TX-010

Contents	$\frac{kg}{set}$	Code	No.
∅ 2163 BTX T10 T15 T20 T25 T30	0.435	1482327	2163 TX-05

Contents	$\frac{kg}{set}$	Code	No.
∅ 2163 BTX T7 T8 T9 T10 T15 T20 T25 T27 T30 T40	0.740	1482335	2163 TX-010

## 3C-SCREWDRIVER WITH STRIKING CAP

### 2154SK 3C-SCREWDRIVER WITH STRIKING CAP

for slotted head screws

- Acc. to DIN ISO 2380-2, blade tip acc. to DIN ISO 2380-1 Form A
- 3-component handles Power-Grip<sup>3</sup> with striking cap
- Ergonomic handle design enables precise and fatigue-free working
- Positive-fit joint of handle and blade for optimum transmission of force
- Hexagon blade with additional hexagon bolster
- Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- \* Length not standardised



reddot award 2015  
winner

	∅ mm	mm	mm	mm	mm	kg	Code	No.
3.5	0.6	75	180	8	0.086	1845209	2154SK 3,5	
4.5	0.8	75	*	180	8	0.090	1845217	2154SK 4,5
5.5	1.0	100	205	8	0.092	1845225	2154SK 5,5	
6.5	1.2	125	230	10	0.154	1845233	2154SK 6,5	
6.5	1.2	150	255	10	0.229	2824108	2154SK 6,5-150	
7.0	1.2	125	230	10	0.229	2824116	2154SK 7	
8.0	1.2	150	270	13	0.178	1845241	2154SK 8	
8.0	1.6	175	295	13	0.229	2824124	2154SK 8-175	
10.0	1.6	200	320	13	0.214	1845268	2154SK 10	
10.0	1.6	300	420	13	0.229	2824132	2154SK 10-300	
12.0	2.0	200	320	16	0.260	1845276	2154SK 12	
12.0	2.0	250	370	16	0.229	2824140	2154SK 12-250	
14.0	2.5	250	370	16	0.324	1845284	2154SK 14	

### 2160SK PZ 3C-SCREWDRIVER WITH STRIKING CAP

for cross-head screws Pozi PZ

- Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PZ
- 3-component handles Power-Grip<sup>3</sup> with striking cap
- Ergonomic handle design enables precise and fatigue-free working
- Positive-fit joint of handle and blade for optimum transmission of force
- Hexagon blade with additional hexagon bolster
- Blade from GEDORE molybdenum-vanadium-Plus tempered steel



reddot award 2015  
winner

	PZ	M	mm	mm	mm	kg	Code	No.
1	M2 - M3	80	185	8	0.086	1845330	2160SK PZ 1	
2	M3,5 - M5	100	205	10	0.148	1845349	2160SK PZ 2	
3	M5,5 - M7	150	270	13	0.206	1845357	2160SK PZ 3	

### 2160SK PH 3C-SCREWDRIVER WITH STRIKING CAP

for cross-head screws PH

- Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PH
- 3-component handles Power-Grip<sup>3</sup> with striking cap
- Ergonomic handle design enables precise and fatigue-free working
- Positive-fit joint of handle and blade for optimum transmission of force
- Hexagon blade with additional hexagon bolster
- Blade from GEDORE molybdenum-vanadium-Plus tempered steel



reddot award 2015  
winner

	PH	M	mm	mm	mm	kg	Code	No.
1	M2 - M3	80	185	8	0.086	1845292	2160SK PH 1	
2	M3,5 - M5	100	205	10	0.148	1845306	2160SK PH 2	
3	M5,5 - M7	150	270	13	0.204	1845314	2160SK PH 3	
4	M8 - M10	200	320	16	0.292	1845322	2160SK PH 4	

### SK 2154 PH-06 3C-SCREWDRIVER SET WITH STRIKING CAP

6 pieces

- Practical set composition in environmentally-friendly cardboard box
- For firmly seated slotted and cross-head screws PH
- Hexagon blade with additional hexagon bolster
- 3-component handles Power-Grip<sup>3</sup> with striking cap
- Ergonomic handle design enables precise and fatigue-free working
- Positive-fit joint of handle and blade for optimum transmission of force
- Blade from GEDORE molybdenum-vanadium-Plus tempered steel



reddot award 2015  
winner

Contents	kg	Code	No.
∅ 2154SK 4,5 5,5 6,5 8	0.880	1878743	SK 2154 PH-06
⊕ 2160SK PH 1 2			

## SCREWDRIVER WITH WOODEN HANDLE

### 147 SCREWDRIVER for slotted head screws

- › Similar to DIN ISO 2380-2 Row B+C, blade tip acc. to DIN ISO 2380-1 Form A
- › Blade tanged right through the handle, chrome-plated
- › GEDORE vanadium steel 50CrV4
- › Hardwood handle, clear varnished with leather cap
- › Hexagon bolster for higher transmission of force



$\Theta$ mm	$\text{mm} \frac{1}{2}$	$\text{mm} \frac{1}{4}$	$\text{mm} \frac{5}{8}$	$\text{mm} \frac{3}{4}$	$\text{mm} \frac{7}{8}$	Code	No.
<b>3.5</b>	0.6	75	170	6	0.055	6413830	147 3,5
<b>4.5</b>	0.8	90	185	6	0.059	6413910	147 4,5
<b>5.5</b>	1.0	100	200	8	0.073	6414050	147 5,5
<b>7.0</b>	1.2	125	235	10	0.112	6414130	147 7
<b>9.0</b>	1.4	150	270	12	0.166	6414210	147 9
<b>10.0</b>	1.6	175	300	12	0.192	6414480	147 10
<b>12.0</b>	2.0	200	330	13	0.250	6414560	147 12

### 148 SCREWDRIVER for slotted head screws

- › Similar to DIN ISO 2380-2 Row B+C, blade tip acc. to DIN ISO 2380-1 Form A
- › Hexagon blade with forged bolster for higher transmission of force
- › Blade tanged right through the handle, chrome-plated
- › GEDORE vanadium steel 50CrV4
- › Hardwood handle, clear varnished with leather cap



$\Theta$ mm	$\text{mm} \frac{1}{2}$	$\text{mm} \frac{1}{4}$	$\text{mm} \frac{5}{8}$	$\text{mm} \frac{3}{4}$	$\text{mm} \frac{7}{8}$	Code	No.
<b>5.5</b>	0.8	100	200	6	0.083	6415020	148 5,5
<b>7.0</b>	1.0	125	230	7	0.123	6415100	148 7
<b>8.0</b>	1.2	150	270	8	0.174	6415290	148 8
<b>10.0</b>	1.6	175	300	8	0.233	6415370	148 10
<b>12.0</b>	2.0	200	330	12	0.381	6415450	148 12
<b>14.0</b>	2.5	250	390	12	0.478	6415530	148 14

### 162 SCREWDRIVER for cross-head screws PH

- › Similar to DIN ISO 8764-2, tip acc. to DIN ISO 8764-1 PH
- › Blade tanged right through the handle, chrome-plated

- › GEDORE vanadium steel 50CrV4
- › Hardwood handle, clear varnished with leather cap

- › Hexagon bolster for higher transmission of force



$\oplus$ PH	$\text{mm} \frac{1}{2}$	$\text{mm} \frac{1}{4}$	$\text{mm} \frac{5}{8}$	$\text{mm} \frac{3}{4}$	$\text{mm} \frac{7}{8}$	Code	No.
<b>1</b>	M 2 - M 3	80	180	6	0.058	6429400	162 1
<b>2</b>	M 3,5 - M 5	100	210	10	0.096	6429590	162 2
<b>3</b>	M 6	150	275	12	0.172	6429670	162 3
<b>4</b>	M 8 - M 10	200	340	17	0.325	6429750	162 4

### 147-04 SCREWDRIVER SET 4 pieces

- › Work-oriented assortment packed in environmentally-friendly cardboard box
- › For slotted head screws
- › Blade tanged right through the handle, chrome-plated
- › GEDORE vanadium steel 50CrV4
- › Hardwood handle, clear varnished with leather cap
- › Hexagon bolster for higher transmission of force



Contents	$\frac{\text{kg}}{\text{A}}$	Code	No.
<b>147 5,5 7 9 10</b>	0.585	6422820	147-04

### 147-162-05 SCREWDRIVER SET 5 pieces

- › Work-oriented assortment packed in environmentally-friendly cardboard box
- › For slotted head and cross-head screws PH
- › Blade tanged right through the handle, chrome-plated
- › GEDORE vanadium steel 50CrV4
- › Hardwood handle, clear varnished with leather cap
- › Hexagon bolster for higher transmission of force



Contents	$\frac{\text{kg}}{\text{A}}$	Code	No.
<b>147 5,5 7 9</b>	0.535	6423120	147-162-05
<b>162 1 2</b>			

## ELECTRONIC SCREWDRIVER

### 171 IS ELECTRONIC SCREWDRIVER for slotted head screws

- › Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- › Tip additionally coated for highest precision and corrosion protection
- › 2-component-handle in ergonomic design
- › Pivoting end cap with micro anti-slip surface
- › Colour coding of the drive type



	mm	mm	mm	mm	Ø	kg	Code	No.
1.2	60	155	2,5	0,017	1845004	171 IS 1,2		
1.5	60	155	2,5	0,014	6436450	171 IS 1,5		
1.8	60	155	2,5	0,017	1845012	171 IS 1,8		
2.0	60	155	2,5	0,017	6438660	171 IS 2		
2.5	75	170	2,5	0,020	1845020	171 IS 2,5		
3.0	100	195	3,0	0,023	1845039	171 IS 3		

### 165 PH ELECTRONIC SCREWDRIVER for cross-head screws PH

- › Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- › Tip additionally coated for highest precision and corrosion protection
- › 2-component-handle in ergonomic design
- › Pivoting end cap with micro anti-slip surface
- › Colour coding of the drive type



		mm	mm	mm	Ø	kg	Code	No.
000		60	155	2,5	0,018	1845047	165 PH 000	
00		60	155	2,5	0,016	6442770	165 PH 00	
0	M1,6 - M2	60	155	3,0	0,018	6442930	165 PH 0	
1	M2-M3	80	175	4,5	0,031	1845055	165 PH 1	

### 165 TX ELECTRONIC SCREWDRIVER

for recessed TORX® head screws

- › Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- › Tip additionally coated for highest precision and corrosion protection
- › 2-component-handle in ergonomic design
- › Pivoting end cap with micro anti-slip surface
- › Colour coding of the drive type

› TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



		mm	mm	mm	Ø	kg	Code	No.
T3	M1,2 - M1,4	1,13	60	155	2,5	0,016	1845098	165 TXT3
T4	M1,4	1,29	60	155	2,5	0,016	1845101	165 TXT4
T5	M1,8	1,42	60	155	2,5	0,017	1845128	165 TXT5
T6	M2	1,69	60	155	3,0	0,019	1845136	165 TXT6
T7	M2,5	1,99	60	155	3,0	0,019	1845144	165 TXT7
T8	M2,5	2,31	60	155	3,0	0,019	1845152	165 TXT8
T9	M3	2,50	60	155	3,0	0,019	1845160	165 TXT9
T10	M3 - M3,5	2,74	60	155	3,0	0,020	1845179	165 TXT10
T15	M3,5 - M4	3,27	60	155	3,5	0,023	1845187	165 TXT15
T20	M4 - M5	3,86	80	175	4,0	0,029	1845195	165 TXT20

### 164 IN ELECTRONIC SCREWDRIVER

for in-hex screws

- › Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- › Tip additionally coated for highest precision and corrosion protection
- › 2-component-handle in ergonomic design
- › Pivoting end cap with micro anti-slip surface
- › Colour coding of the drive type



		mm	mm	mm	Ø	kg	Code	No.
0,7		60	155	2,5	0,018	1845063	164 IN 0,7	
0,9		60	155	2,5	0,018	1845071	164 IN 0,9	
1,3		60	155	2,5	0,017	6443150	164 IN 1,3	
1,5		60	155	2,5	0,017	6443230	164 IN 1,5	
2		60	155	2,5	0,019	6443310	164 IN 2	
2,5		60	155	3,0	0,016	6443580	164 IN 2,5	
3		60	155	3,5	0,022	6443740	164 IN 3	

## 165-171-06

### ELECTRONIC SCREWDRIVER SET

6 pieces

- › For slotted head and cross-head screws PH
- › Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- › Tip additionally coated for highest precision and corrosion protection
- › 2-component-handle in ergonomic design
- › Pivoting end cap with micro anti-slip surface
- › Colour coding of the drive type
- › In plastic case
- › With GEDORE Check-Tool-System: 2-colour foam insert to check that the set is complete




## 165 TX-06

### ELECTRONIC SCREWDRIVER SET

6 pieces

- › For recessed TORX® head screws
- › Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- › Tip additionally coated for highest precision and corrosion protection
- › 2-component-handle in ergonomic design
- › Pivoting end cap with micro anti-slip surface
- › Colour coding of the drive type
- › In plastic case
- › With GEDORE Check-Tool-System: 2-colour foam insert to check that the set is complete
- › TORX® = reg. trademark of Acument Intellectual Properties, LLC, USA

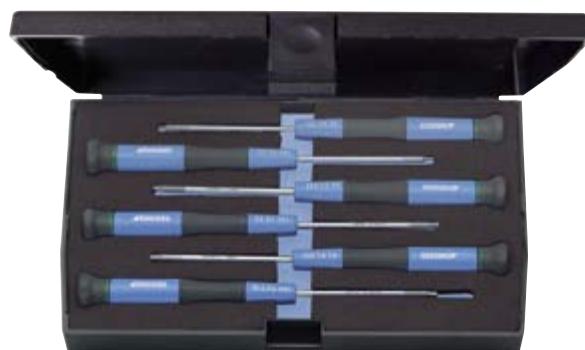

Contents	$\frac{\text{kg}}{\text{pc}}$	Code	No.
⊕ 165 PH 000 00 0	0.385	1902849	165-171-06
⊖ 171 IS 1,2 1,8 2,5			


Contents	$\frac{\text{kg}}{\text{pc}}$	Code	No.
⊕ 165 TX5 T6 T7 T8 T9 T10	0.415	1902857	165 TX-06

## 1021

### ELECTRONIC SCREWDRIVER SET

7 pieces



- › In plastic case
- › Dimensions: 275 x 150 x 42 mm

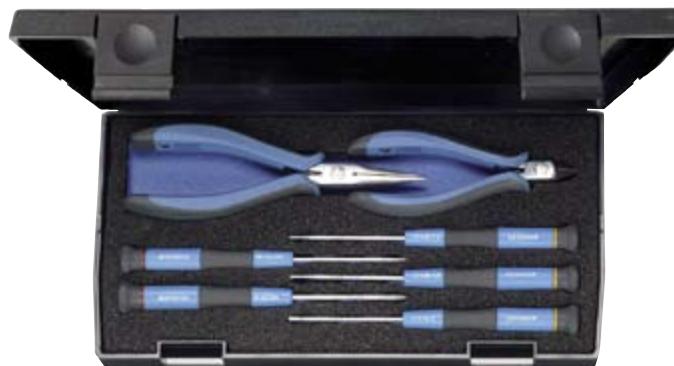


Contents	$\frac{\text{kg}}{\text{pc}}$	Code	No.
⊖ 171 IS 1,2 1,5 2	0.624	6601830	1021
⊕ 165 PH 00 0			
8305-2			
8306-5			

## 2C-T-HANDLE

- With hanging hole
- Soft component made of thermoplastic elastomer
- Hard component made of fibre-glass reinforced plastic with special-purpose glass fibres. The benefits of short glass fibres (rigidity and firmness) are combined with that of long glass fibres (impact strength).

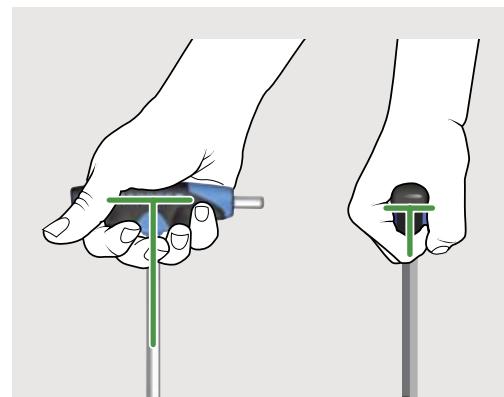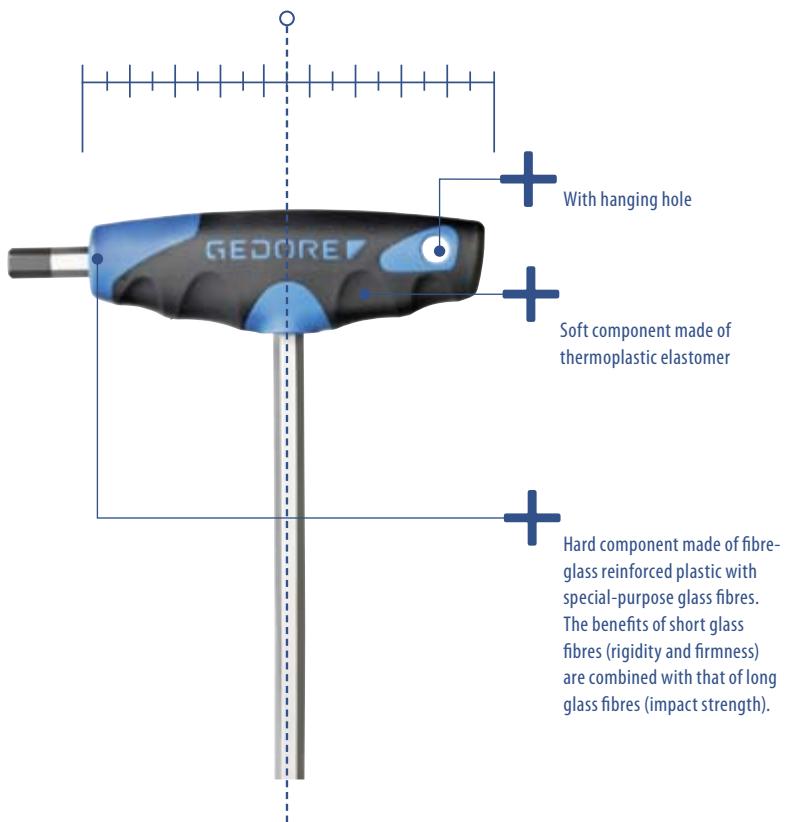

With T-shaped cross-section: broad at the top and slender below. In this way one's hand takes on a firm grip leading to vigorous working over an extended period without any fatigue.

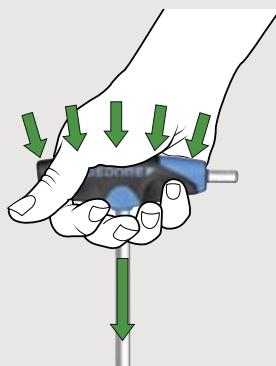


Soft zones where sensitive hand zones grip e.g. finger tips. Hard zones where robust hand zones grip.

## 2142 T (MM) HEXAGON ALLEN KEY WITH 2C-T-HANDLE

for in-hex screws

- With hanging hole
- GEDORE vanadium steel 61CrSiV5, chromated

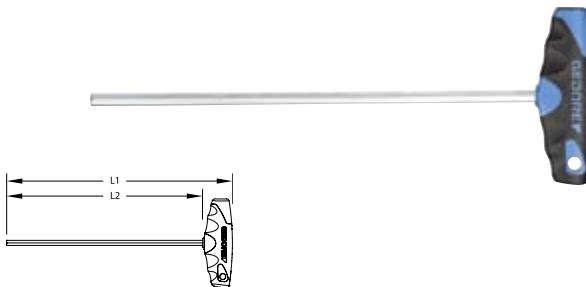


$\bullet$ mm	L <sub>1</sub>	L <sub>2</sub>	$\frac{\text{kg}}{\text{kg}}$	Code	No.
2	152	125	0.061	2647257	2142T 2
2,5	152	125	0.091	2647265	2142T 2,5
3	152	125	0.071	2647273	2142T 3
4	152	125	0.080	2647281	2142T 4
5	177	150	0.100	2647303	2142T 5
6	188	150	0.140	2647311	2142T 6
7	213	175	0.160	2681439	2142T 7
8	213	175	0.221	2647338	2142T 8
10	238	200	0.201	2647346	2142T 10

## 2142 T (AF) HEXAGON ALLEN KEY WITH 2C-T-HANDLE

for in-hex screws

- With hanging hole
- GEDORE vanadium steel 61CrSiV5, chromated

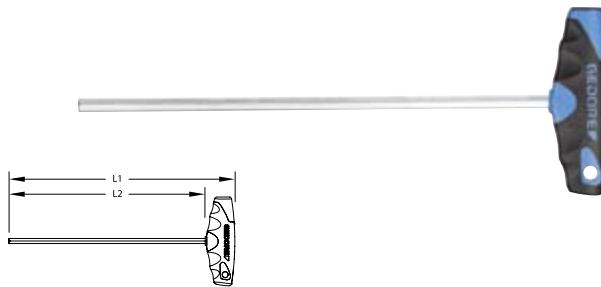


$\bullet$ "AF	L <sub>1</sub>	L <sub>2</sub>	$\frac{\text{kg}}{\text{kg}}$	Code	No.
1/8	152	125	0.101	2647354	2142T 1/8AF
5/32	152	125	0.121	2647362	2142T 5/32AF
3/16	177	150	0.100	2647370	2142T 3/16AF
1/4	213	175	0.140	2647389	2142T 1/4AF
5/16	213	175	0.221	2647397	2142T 5/16AF
3/8	238	200	0.201	2647400	2142T 3/8AF

## DT 2142

### HEXAGON ALLEN KEY WITH 2CT-HANDLE


for in-hex screws

- With hanging hole
- With 2 hexagons, same size each end
- GEDORE vanadium steel 61CrSiV5, chromated

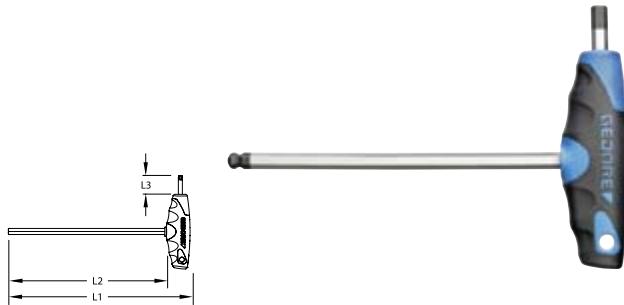

$\bullet$	$\square \text{ mm}$	$L_1$	$L_2$	$L_3$	$\frac{\text{kg}}{\text{kg}}$	Code	No.
2	152	125	15	0.091	2488914	DT 2142 2	
2,5	152	125	15	0.071	2498596	DT 2142 2,5	
3	152	125	15	0.040	2498618	DT 2142 3	
4	152	125	15	0.080	2498626	DT 2142 4	
5	177	150	20	0.100	2502631	DT 2142 5	
6	188	150	20	0.120	2502658	DT 2142 6	
7	213	175	25	0.251	2505487	DT 2142 7	
8	213	175	25	0.180	2507447	DT 2142 8	
10	238	200	25	0.280	2507471	DT 2142 10	

1500 CT2-DT 2142



&gt;110

## DT 2142 TX



### WRENCH KEY WITH 2CT-HANDLE

for recessed TORX® screws

- Working angle approx. 25°
- With hanging hole

- Chrome-vanadium steel, blades chrome-plated, tip phosphated

- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

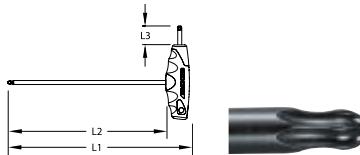


$\bullet$	$\square \text{ mm}$	$\star \text{ mm}$	$L_1$	$L_2$	$\frac{\text{kg}}{\text{kg}}$	Code	No.
T5	M1,8	1,42	152	125	0.081	2509393	2142 TX T5
T6	M2	1,70	152	125	0.081	2511622	2142 TX T6
T7	M2,5	1,99	152	125	0.081	2511657	2142 TX T7
T8	M2,5	2,31	152	125	0.051	2513072	2142 TX T8
T9	M3	2,50	152	125	0.071	2513102	2142 TX T9
T10	M3 - M3,5	2,74	152	125	0.061	2513749	2142 TX T10
T15	M3,5 - M4	3,27	152	125	0.091	2516934	2142 TX T15
T20	M4 - M5	3,86	152	125	0.081	2519062	2142 TX T20
T25	M4,5 - M5	4,43	177	150	0.091	2519186	2142 TX T25
T27	M4,5 - M6	4,99	177	150	0.100	2521571	2142 TX T27
T30	M6 - M7	5,52	188	150	0.100	2521598	2142 TX T30
T40	M7 - M8	6,65	213	175	0.140	2521601	2142 TX T40
T45	M8 - M10	7,82	213	175	0.160	2521636	2142 TX T45
T50	M10	8,83	238	200	0.180	2521644	2142 TX T50

$\bullet$	$\square \text{ mm}$	$\star \text{ mm}$	$L_1$	$L_2$	$L_3$	$\frac{\text{kg}}{\text{kg}}$	Code	No.
T10	M3 - M3,5	2,74	152	125	15	0.091	2647486	DT 2143 KTX T10
T15	M3,5 - M4	3,27	152	125	15	0.081	2647494	DT 2143 KTX T15
T20	M4 - M5	3,86	152	125	15	0.071	2647508	DT 2143 KTX T20
T25	M4,5 - M5	4,43	177	150	20	0.121	2647516	DT 2143 KTX T25
T27	M4,5 - M6	4,99	177	150	20	0.120	2647524	DT 2143 KTX T27
T30	M6 - M7	5,52	188	150	25	0.140	2647532	DT 2143 KTX T30
T40	M7 - M8	6,65	213	175	25	0.180	2647540	DT 2143 KTX T40

## 2133 T NUT DRIVER WITH 2G-T-HANDLE

- With hanging hole
- Head depth 25 mm
- GEDORE vanadium steel 31CrV3, matt chrome-plated

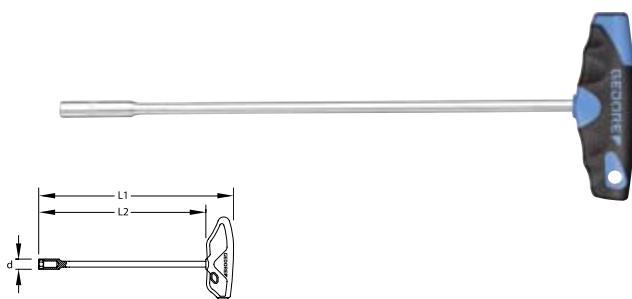

$\text{Ø mm}$	$L_1$	$L_2$	d	$\frac{\text{kg}}{\text{m}}$	Code	No.
<b>5.5</b>	257	230	8	0.101	2647621	2133 T 5,5
<b>6.0</b>	257	230	9	0.101	2647648	2133 T 6
<b>7.0</b>	268	230	11	0.101	2647656	2133 T 7
<b>8.0</b>	268	230	12	0.180	2647664	2133 T 8
<b>9.0</b>	268	230	13	0.180	2647672	2133 T 9
<b>10.0</b>	268	230	14	0.180	2647680	2133 T 10
<b>11.0</b>	268	230	16	0.200	2647699	2133 T 11
<b>12.0</b>	268	230	17	0.220	2647702	2133 T 12
<b>13.0</b>	268	230	18	0.240	2647710	2133 T 13

## DTT 42 HEXAGON ALLEN KEY

for in-hex screws


- With 3 hexagons, same size each end
- T-handle fixed



$\text{Ø mm}$	$L_1$	$L_2$	$L_3$	$\emptyset$	$\frac{\text{kg}}{\text{m}}$	Code	No.
<b>3</b>	150	75	30	5.0	0.042	1669540	DTT 42 3
<b>4</b>	180	90	35	6.0	0.064	1669559	DTT 42 4
<b>5</b>	180	90	35	7.0	0.092	1669567	DTT 42 5
<b>6</b>	210	105	40	8.0	0.134	1669575	DTT 42 6
<b>8</b>	250	125	50	9.5	0.224	1669583	DTT 42 8
<b>10</b>	300	150	60	12.0	0.418	1669591	DTT 42 10

## 42 DKEL - THE FIRST WITH TWO BALL ENDS

- Two ball ends and an extra short angle side for working optimally in confined spaces
- Positive or negative inclination produces a possible 50° angle of approach (+/- 25°) to the screw axis
- Projecting hindrances can be got round with the two ball ends - rapid work is the outcome
- The GEDORE vanadium steel 59CrV4 with its high manganese share ensures the screwdriver has that strength needed

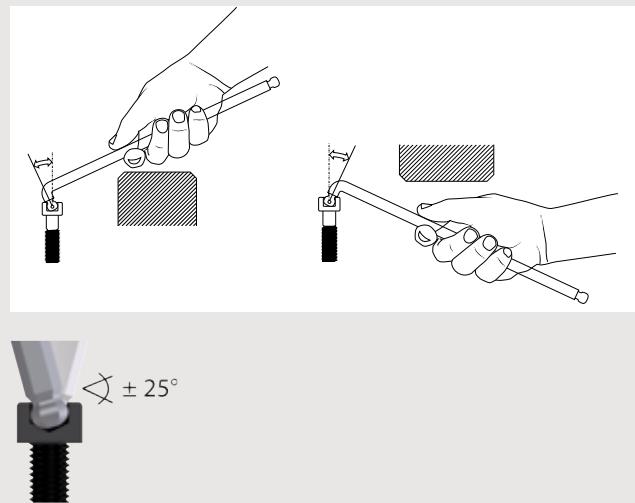

## H 42 DKEL-88 HEXAGON ALLEN KEY SET

for in-hex screws, extra long, with double ball end

- Particularly suitable for confined spaces in view of a double ball end and short angled side
- Easy to use where normal hexagon allen keys would fail thanks to improved accessibility and a low profile
- Rapid progress in work since the two ball ends allow protrusions to be gone round
- Reduces the risk of injury to the fingers when working on flat surfaces
- GEDORE vanadium steel 59CrV4, zinc-plated



Contents	$\frac{\text{kg}}{\text{m}}$	Code	No.
<b>42 DKEL 2 2,5 3 4 5 6 8 10</b>	0.400	2797186	H 42 DKEL-88

## 42 DKEL

### HEXAGON ALLEN KEY

for in-hex screws, extra long, with double ball end

- Particularly suitable for confined spaces in view of a double ball end and short angled side
- Easy to use where normal hexagon allen keys would fail thanks to improved accessibility and a low profile
- Rapid progress in work since the two ball ends allow protrusions to be gone round
- Reduces the risk of injury to the fingers when working on flat surfaces
- GEDORE vanadium steel 59CrV4, zinc-plated



• mm	L <sub>1</sub>	L <sub>2</sub>	$\frac{d}{kg}$	Code	No.
1,5	89	7,5	0,003	2797062	42 DKEL 1,5
2	102	9,0	0,004	2797089	42 DKEL 2
2,5	115	10,0	0,006	2797097	42 DKEL 2,5
3	129	11,5	0,010	2797100	42 DKEL 3
4	144	14,5	0,018	2797119	42 DKEL 4
5	165	16,5	0,050	2797127	42 DKEL 5
6	186	19,0	0,060	2797135	42 DKEL 6
7	197	20,5	0,070	2797143	42 DKEL 7
8	205	22,0	0,090	2797151	42 DKEL 8
10	227	28,0	0,160	2797178	42 DKEL 10

## 42 KEL

### HEXAGON ALLEN KEY

for in-hex screws, extra long, with ball end

- GEDORE vanadium steel 59CrV4, chrome-plated



• mm	L <sub>1</sub>	L <sub>2</sub>	$\frac{d}{kg}$	Code	No.
1,5	91,5	15,5	0,003	1563556	42 KEL 1,5
2	102,0	18,0	0,004	6370090	42 KEL 2
2,5	114,5	20,5	0,006	6370170	42 KEL 2,5
3	129,0	23,0	0,010	6370250	42 KEL 3
4	144,0	29,0	0,019	6370330	42 KEL 4
5	165,0	33,0	0,033	6370410	42 KEL 5
6	186,0	38,0	0,053	6370680	42 KEL 6
7	197,0	41,0	0,076	1729241	42 KEL 7
8	208,0	44,0	0,103	6370760	42 KEL 8
10	234,0	50,0	0,179	6370840	42 KEL 10
12	262,0	57,0	0,287	6370920	42 KEL 12

## H 42 KEL-88

### HEXAGON ALLEN KEY SET

for in-hex screws, extra long, with ball end

- In blue plastic holder (LPDE)
- GEDORE vanadium steel 59CrV4, chromated




Contents	$\frac{d}{kg}$	Code	No.
• mm 42 KEL 2 2,5 3 4 5 6 8 10	0,415	1523988	H 42 KEL-88

## H 42 EL-88

### HEXAGON ALLEN KEY SET

for in-hex screws, extra long

- In blue plastic holder (LPDE)
- Acc. to DIN ISO 2936
- GEDORE vanadium steel 61CrSiV5, zinc-plated

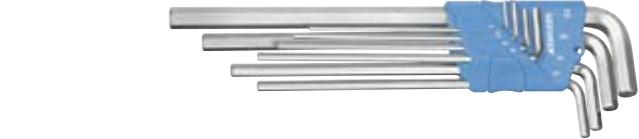

Contents	$\frac{d}{kg}$	Code	No.
• mm 42 EL 2 2,5 3 4 5 6 8 10	0,425	1505416	H 42 EL-88

## H 42 EL-88 A

### HEXAGON ALLEN KEY SET

for in-hex screws, extra long

- In blue plastic holder (LPDE)
- GEDORE vanadium steel 61CrSiV5, zinc-plated




Contents	$\frac{d}{kg}$	Code	No.
• "AF 42 EL 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16"	0,300	1543555	H 42 EL-88 A

## 42 EL (MM) HEXAGON ALLEN KEY

for in-hex screws, extra long

- Acc. to DIN ISO 2936
- GEDORE vanadium steel 61CrSiV5, zinc-plated




$\bullet$ mm	L <sub>1</sub>	L <sub>2</sub>	$\frac{\text{kg}}{\text{kg}}$	Code	No.
<b>2</b>	102.0	18.0	0.004	6350810	42 EL 2 (5/64AF)
<b>2,5</b>	114.5	20.5	0.007	6351030	42 EL 2,5
<b>3</b>	129.0	23.0	0.010	6351110	42 EL 3
<b>4</b>	144.0	29.0	0.019	6351380	42 EL 4
<b>5</b>	165.0	33.0	0.033	6351460	42 EL 5
<b>5,5</b>	186.0	38.0	0.047	1543342	42 EL 7/32AF (5,5MM)
<b>6</b>	186.0	38.0	0.054	6351540	42 EL 6
<b>7</b>	194.0	41.0	0.750	2977486	42 EL 7
<b>8</b>	208.0	44.0	0.104	6351620	42 EL 8
<b>10</b>	234.0	50.0	0.184	6351700	42 EL 10
<b>12</b>	262.0	57.0	0.293	6351890	42 EL 12
<b>14</b>	294.0	70.0	0.453	6351970	42 EL 14

## 42 EL (AF) HEXAGON ALLEN KEY

for in-hex screws, extra long

- GEDORE vanadium steel 61CrSiV5, zinc-plated



$\bullet$ "AF"	L <sub>1</sub>	L <sub>2</sub>	$\frac{\text{kg}}{\text{kg}}$	Code	No.
<b>5/64</b>	102.0	18.0	0.004	6350810	42 EL 2 (5/64AF)
<b>3/32</b>	114.5	20.5	0.006	1543377	42 EL 3/32AF
<b>1/8</b>	129.0	23.0	0.011	1543318	42 EL 1/8AF
<b>5/32</b>	144.0	29.0	0.019	1543326	42 EL 5/32AF
<b>3/16</b>	165.0	33.0	0.030	1543334	42 EL 3/16AF
<b>7/32</b>	186.0	38.0	0.047	1543342	42 EL 7/32AF (5,5MM)
<b>1/4</b>	197.0	41.0	0.065	1543369	42 EL 1/4AF
<b>5/16</b>	208.0	44.0	0.103	1543350	42 EL 5/16AF
<b>3/8</b>	234.0	50.0	0.167	1543385	42 EL 3/8AF
<b>1/2</b>	277.0	63.0	0.355	1543393	42 EL 1/2AF
<b>9/16</b>	294.0	70.0	0.475	1543407	42 EL 9/16AF

## PH 42-88 HEXAGON ALLEN KEY SET

for in-hex screws

- In blue plastic holder
- GEDORE vanadium steel 61CrSiV5, zinc-plated



Contents	$\frac{\text{kg}}{\text{kg}}$	Code	No.
<b>• mm 42 2 2,5 3 4 5 6 8 10</b>	0.245	6352000	PH 42-88

## H 42-10 HEXAGON ALLEN KEY SET

for in-hex screws

- In blue plastic holder (LPDE)
- Acc. to DIN ISO 2936
- GEDORE vanadium steel 61CrSiV5, zinc-plated



Contents	$\frac{\text{kg}}{\text{kg}}$	Code	No.
<b>• mm 42 1,3 1,5 2 2,5 3 4 5 6 8 10</b>	0.259	1505408	H 42-10

## 42 (MM) HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue PVC wallet
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



Contents	$\frac{\text{kg}}{\text{set}}$	Code	No.
● mm 42 2 2,5 3 4 5 6 8	0.144	6347510	42-07
● mm 42 2,5 3 4 5 6 8 10	0.254	6349050	42-70

Contents	$\frac{\text{kg}}{\text{set}}$	Code	No.
● mm 42 3 4 5 6 8 10 12 14	0.716	6347780	42-08
● mm 42 2 2,5 3 4 5 6 7 8 10	0.297	6347860	42-09

## 42 (MM) HEXAGON ALLEN KEY

for in-hex screws

- > Acc. to DIN ISO 2936
- > GEDORE vanadium steel 61CrSiV5, sizes 0.7 mm and 0.9 mm gun-metal finish, zinc-plated up to size 12 mm, chrome-plated up from size 14 mm
- \* not standardised



● mm	L <sub>1</sub>	L <sub>2</sub>	$\frac{\text{kg}}{\text{set}}$	Code	No.
0,7	33.0	7.0	0.001	6342200	42 0,7
0,9	33.0	11.0	0.001	6342390	42 0,9
1,3	41.0	13.0	0.001	6342470	42 1,3
1,5	46.5	15.5	0.001	6340260	42 1,5
2	52.0	18.0	0.002	6340340	42 2 (5/64AF)
2,5	58.5	20.5	0.004	6340420	42 2,5
3	66.0	23.0	0.006	6340500	42 3
4	74.0	29.0	0.011	6340690	42 4
5	85.0	33.0	0.019	6340770	42 5
5,5	*	82.0	0.022	6344840	42 7/32AF (5,5MM)
6	96.0	38.0	0.031	6340850	42 6
7	*	102.0	0.044	6340930	42 7

● mm	L <sub>1</sub>	L <sub>2</sub>	$\frac{\text{kg}}{\text{set}}$	Code	No.	
8	108.0	44.0	0.061	6341070	42 8	
9	*	114.0	47.0	0.081	6341150	42 9
10	122.0	50.0	0.106	6341230	42 10	
12	137.0	57.0	0.169	6341310	42 12	
14	154.0	70.0	0.266	6341580	42 14	
17	177.0	80.0	0.430	6341660	42 17	
19	199.0	89.0	0.602	6341740	42 19	
22	222.0	102.0	0.907	6341820	42 22	
24	248.0	114.0	1.211	6341900	42 24	
27	277.0	127.0	1.711	6342550	42 27	
30	315.0	142.0	2.423	6342630	42 30	
32	347.0	157.0	3.010	6342710	42 32	

## H 42-88 A HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue plastic holder (LPDE)
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



Contents	$\frac{\text{kg}}{\text{set}}$	Code	No.
● "AF" 42 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16"	0.172	1505424	H 42-88 A

## 42 (AF) HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue PVC wallet
- > GEDORE vanadium steel 61CrSiV5, zinc-plated




Contents	$\frac{\text{kg}}{\text{set}}$	Code	No.
● "AF" 5/64 3/32 1/8 5/32 3/16 7/32 1/4"	0.103	6348750	42-07 A
● "AF" 1/8 5/32 3/16 1/4 5/16 3/8 1/2 9/16"	0.731	6348830	42-08 A
● "AF" 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16 3/8"	0.257	6348910	42-09 A

## 42 (AF) HEXAGON ALLEN KEY

for in-hex screws

- > GEDORE vanadium steel 61CrSiV5, zinc-plated up to size 1/2", chrome-plated up from size 9/16"

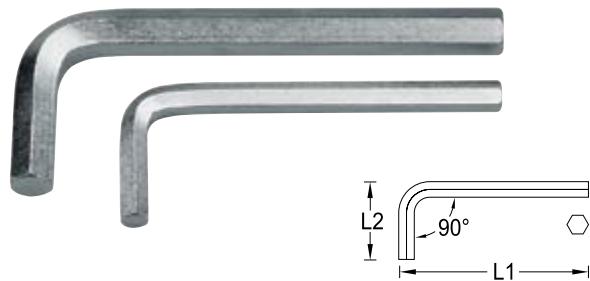


$\bullet$ "AF	L <sub>1</sub>	L <sub>2</sub>	$\frac{\text{kg}}{\text{kg}}$	Code	No.
3/64	41.0	13.0	0.002	6342120	42 3/64AF
1/16	46.5	15.5	0.002	6342040	42 1/16AF
3/32	56.5	20.5	0.004	6344330	42 3/32AF
5/64	52.0	18.0	0.002	6340340	42 2 (5/64AF)
1/8	60.0	23.0	0.006	6344410	42 1/8AF
5/32	67.0	26.0	0.010	6344680	42 5/32AF
3/16	73.0	30.0	0.015	6344760	42 3/16AF
7/32	82.0	32.0	0.022	6344840	42 7/32AF (5,5MM)
1/4	92.0	36.5	0.035	6344920	42 1/4AF
5/16	102.0	43.0	0.059	6345060	42 5/16AF
3/8	115.0	49.0	0.094	6345140	42 3/8AF
1/2	142.0	61.0	0.205	6345220	42 1/2AF
9/16	154.0	66.0	0.274	6345300	42 9/16AF
5/8	168.0	76.0	0.376	6345490	42 5/8AF
3/4	199.0	89.0	0.309	6345570	42 3/4AF

## 42 Z HEXAGON ALLEN KEY

with pilot, for in-hex screws

- > Acc. to DIN 6911
- > Chrome-vanadium steel, zinc-plated
- \* not standardised

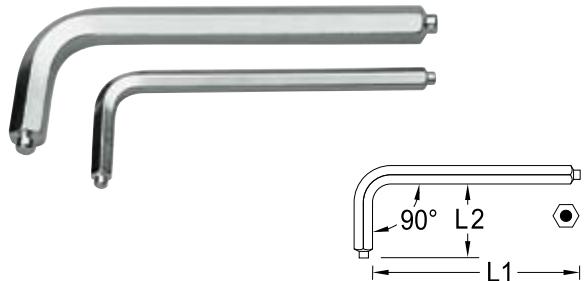

$\bullet$ mm	L <sub>1</sub>	L <sub>2</sub>	$\frac{\text{kg}}{\text{kg}}$	Code	No.
3	63	20	0.006	6342980	42 Z 3
4	70	25	0.010	6343010	42 Z 4
5	80	28	0.019	6343280	42 Z 5
6	90	32	0.031	6343360	42 Z 6
7	*	34	0.042	6343440	42 Z 7
8	100	36	0.058	6343520	42 Z 8
10	112	40	0.100	6343600	42 Z 10
12	125	45	0.162	6343790	42 Z 12
14	140	56	0.254	6343870	42 Z 14
17	160	63	0.418	6343950	42 Z 17
19	180	70	0.584	6344090	42 Z 19

## S 42-09 A HEXAGON ALLEN KEY SET

for in-hex screws

- > On key ring with quick release
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



Contents	$\frac{\text{kg}}{\text{kg}}$	Code	No.
$\bullet$ "AF 42 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16 3/8"	0.273	6348160	S 42-09 A

## S 42-07 HEXAGON ALLEN KEY SET

for in-hex screws

- > On key ring with quick release
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



Contents	$\frac{\text{kg}}{\text{kg}}$	Code	No.
$\bullet$ mm 42 2 2,5 3 4 5 6 8	0.162	6347430	S 42-07

## SCL 42-70

### HEXAGON ALLEN KEY SET

for in-hex screws

- > In robust metal clip
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



Contents 0.360  
● mm 2,5 3 4 5 6 8 10

Code 6347350 No. SCL 42-70

## SCL 42-90 A

### HEXAGON ALLEN KEY SET

for in-hex screws

- > In robust metal clip
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



Contents 0.260  
● "AF" 5/64 3/32 7/64 1/8 9/64 5/32 3/16  
7/32 1/4"

Code 6354800


No. SCL 42-90 A

## 42 X

### CRANKED ALLEN SOCKET SCREWDRIVER

for multi-point screws XZN

- > Acc. to DIN 65253, tips acc. to DIN 2325
- > GEDORE vanadium steel 50CrV4, chromated

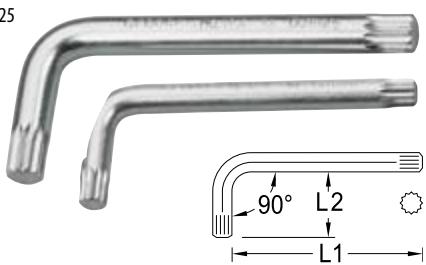

	L <sub>1</sub>	L <sub>2</sub>	0.009	Code	No.
M 4	63	20	0.009	1531212	42 X 4
M 5	75	30	0.015	6350060	42 X 5
M 6	86	34	0.025	6350140	42 X 6
M 8	98	40	0.043	6350220	42 X 8
M 10	110	46	0.085	6350300	42 X 10
M 12	124	52	0.124	6350490	42 X 12
M 14	139	59	0.191	6350570	42 X 14
M 16	156	72	0.308	6350650	42 X 16
M 18	178	81	0.333	6350730	42 X 18

## SCL 42 K-70

### HEXAGON ALLEN KEY SET

for in-hex screws

- > In robust metal clip
- > Execution K with ball end
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



Contents 0.361  
● mm 2,5 3 4 5 6 8 10

Code 6371140 No. SCL 42 K-70

## SCL 43 TX-80

### CRANKED SOCKET KEY SET

for recessed TORX® screws

- > In robust metal clip
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC, USA



Contents 0.286  
● T9 T10 T15 T20 T25 T27 T30 T40

Code 6346460


No. SCL 43 TX-80

## 43

### CRANKED SOCKET KEY

for multi-spline screws RIBE®

- > GEDORE vanadium steel 50CrV4, chromated
- > RIBE® = reg. trademark of Richard Bergner GmbH & Co. KG, Schwabach, Germany

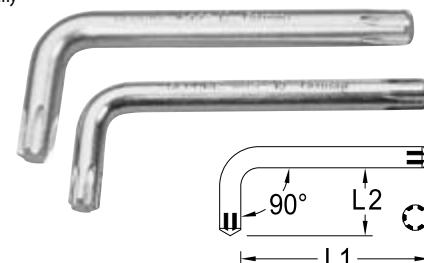

	L <sub>1</sub>	L <sub>2</sub>	0.016	Code	No.
M5	71	25	0.016	6352270	43 5
M6	80	28	0.025	6352350	43 6
M8	90	32	0.049	6352430	43 8
M10	100	36	0.084	6352510	43 10
M12	112	40	0.135	6352780	43 12
M14	125	45	0.203	6352860	43 14

## H 43 TX

### CRANKED SOCKET KEY SET

for recessed TORX® screws

- › In blue LDPE holder
- › Chrome-vanadium steel 50CrV4, gun-metal finish
- › TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA




Contents	$\frac{kg}{set}$	Code	No.
• 43 TX T7 T8 T9 T10 T15 T20 T25 T30 T40	0.120	1531417	H 43 TX-09
• 43 TX T9 T10 T15 T20 T25 T27 T30 T40	0.129	1531425	H 43 TX-88
• 43 TX T10 T15 T20 T25 T27 T30 T40 T45	0.168	1531433	H 43 TX-08

## 43 TX

### CRANKED SOCKET KEY

for recessed TORX® screws

- › Chrome-vanadium steel 50CrV4, gun-metal finish
- › TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

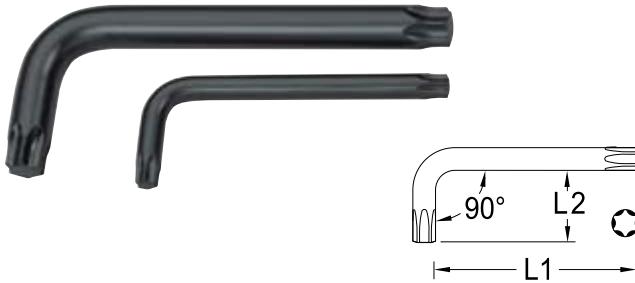

•	M	mm	L <sub>1</sub>	L <sub>2</sub>	$\frac{kg}{set}$	Code	No.
T6	M2	1,69	42	16	0.003	6363550	43 TX T6
T7	M2,5	1,99	48	16	0.003	6363630	43 TX T7
T8	M2,5	2,31	48	16	0.004	6363710	43 TX T8
T9	M3	2,50	48	16	0.004	6363980	43 TX T9
T10	M3 - M3,5	2,74	51	17	0.005	6364010	43 TX T10
T15	M3,5 - M4	3,27	54	18	0.006	6364280	43 TX T15
T20	M4 - M5	3,86	57	19	0.008	6364360	43 TX T20
T25	M4,5 - M5	4,43	60	20	0.010	6364440	43 TX T25
T27	M4,5 - M6	4,99	64	21	0.016	6364520	43 TX T27
T30	M6 - M7	5,52	70	24	0.022	6364600	43 TX T30
T40	M7 - M8	6,65	76	26	0.031	6364790	43 TX T40
T45	M8 - M10	7,82	83	29	0.046	6364870	43 TX T45
T50	M10	8,83	95	32	0.060	6364950	43 TX T50
T55	M12	11,22	108	35	0.122	6365090	43 TX T55
T60	M14	13,25	120	38	0.187	6365170	43 TX T60

## 43 TX-09

### CRANKED SOCKET KEY SET

for recessed TORX® screws

- › In blue PVC wallet
- › Chrome-vanadium steel 50CrV4, gun-metal finish
- › TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Contents	$\frac{kg}{set}$	Code	No.
• 43 TX T7 T8 T9 T10 T15 T20 T25 T30 T40	0.115	6360960	43 TX-09

## H 43 KTX-07

### CRANKED SOCKET KEY SET

for recessed TORX® screws

- › In blue LDPE holder
- › With ball end
- › Chrome-vanadium steel 50CrV4, gun-metal finish
- › TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA




Contents	$\frac{kg}{set}$	Code	No.
• 43 KTX T10 T15 T20 T25 T27 T30 T40	0.169	1531441	H 43 KTX-07

## 43 KTX

### CRANKED SOCKET KEY

for recessed TORX® screws, with ball end

- Working angle approx. 25°
- Chrome-vanadium steel, gun-metal finish
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

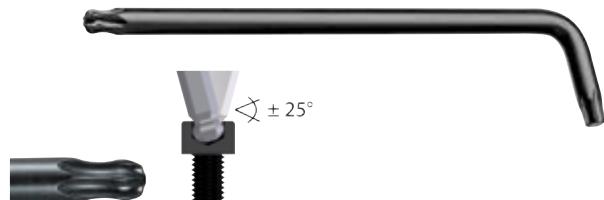

∅ mm	□ mm	★ mm	L <sub>1</sub>	L <sub>2</sub>	kg	Code	No.
<b>T10</b>	M3 - M3,5	2,74	73	17	0.006	6367110	43 KTX T10
<b>T15</b>	M3,5 - M4	3,27	83	17	0.009	6367380	43 KTX T15
<b>T20</b>	M4 - M5	3,86	94	18	0.012	6367460	43 KTX T20
<b>T25</b>	M4,5 - M5	4,43	96	18	0.015	6367540	43 KTX T25
<b>T27</b>	M4,5 - M6	4,99	106	20	0.024	6367620	43 KTX T27
<b>T30</b>	M6 - M7	5,52	119	24	0.033	6367700	43 KTX T30
<b>T40</b>	M7 - M8	6,65	132	26	0.049	6367890	43 KTX T40

## 708

### TORX® GAUGE

- Easy identification of TORX® sizes, internal E4-E16, external T10-T60
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Contents	kg	Code	No.
● E4 - E16	0.022	1394428	708
● T10 - T60			

## 173

### CRANKED SCREWDRIVER

for slotted head screws

- Acc. to DIN 5200, blade tips acc. to DIN ISO 2380-2
- Chrome-vanadium steel, matt nickel-plated




∅ mm	mm	mm	kg	Code	No.
<b>3.5</b>	0.6	90	0.010	6437180	173 3,5
<b>4.0</b>	0.8	100	0.013	6437850	173 4
<b>5.5</b>	1.0	125	0.025	6436100	173 5,5
<b>8.0</b>	1.2	150	0.050	6436370	173 8
<b>10.0</b>	1.6	175	0.087	6437930	173 10
<b>12.0</b>	2.0	200	0.127	6436530	173 12

## 174

### CRANKED SCREWDRIVER

for cross-head screws PH

- Acc. to DIN 5208, tips acc. to DIN ISO 8764-1 PH
- Chrome-vanadium steel, matt nickel-plated

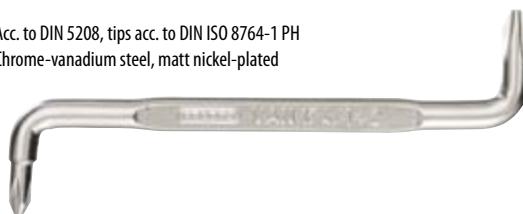

∅ PH	□ mm	mm	kg	Code	No.
<b>1-2</b>	M2 - M5	100	0.029	6436880	174 1
<b>3-4</b>	M6 - M10	200	0.121	6436960	174 3

## VARIOUS

## 149

### MAGNETIZER AND DEMAGNETIZER

- Magnetizes or demagnetises screwdrivers, tweezers and similar tools made from steel
- Blue housing, made from high-quality plastic, unbreakable, cadmium-free

L	H	W	kg	Code	No.
<b>52</b>	26	50	0.088	6416500	149



## 156 S

### SQUARE BLADED AWL

- Blue handle with hanging hole
- Blade bright nickel-plated



L	H	W	kg	Code	No.
100	200	—	0.084	6424520	156 S