


BASIC DIMENSIONS:-
 Flat Plug

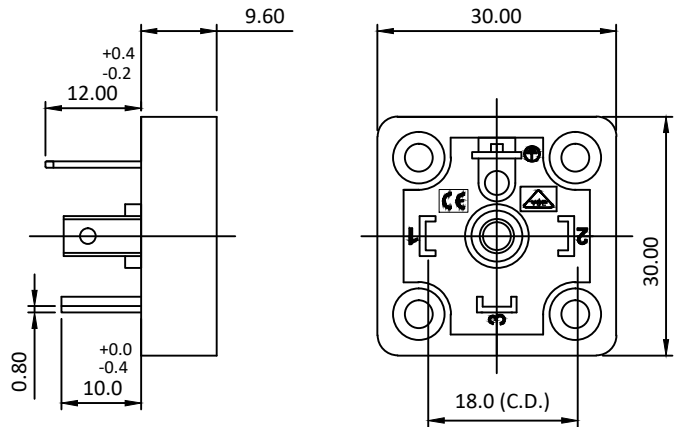

SPECIFICATION TABLE:-

SR.NO.	PARAMETER		SPECIFICATION
1	Connector Type		Solenoid Connector Style A, Square Type
2	V/A Rating		10 A 250 VAC
3	Contact Resistance (Initial)		15 m ohms max.
4	Insulation Resistance At 100 V DC		100 M ohms min.
5	H.V.Break Down Test (For 1-Minute)		2 KV AC
6	Connector Mounting		Screw Mounting
7	Terminals		Solder Type
8	Permissible Temp. With/Without Load		-40°C to 120°C
9	Material.	(a) Body	Nylon-6, GF, V2
		(b) Rubber Gasket	Silicone
		(c) Terminals / Contacts	Brass, Tin Plated
		(d) Mounting Screw	M.S , Zinc Plating With Blue passivation
10	Reference Standard		DIN-43650, ISO 4400, EN-175301-803
11	Compliance Marking		
12	Approvals		

ORDERING CODE:-

Sr. No.		Plug Type	Connection Type	Code
1	a	Flat Plug	2P + E	ME-2/PF-V
	b	Flat Plug	3P + E	ME-3/PF-V

						APP	24.02.06	SBP	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com									
						CHK	24.02.06	YSB										
						DRN	24.02.06	SNV										
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN										
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER								
OVER	-	1	10	mm	Max.	NTS.			1 OF 1	P	M	E	0	2	0	2	V	REVISION
UP TO	1	10	-	Moulding, plating details as per Bill of Material						0								
±	0.2	0.3	0.5	Unspecified colour is Black, GF:Glass filled.														