



MATERIALS:

BODY, BOTTOM BRACKET: BRASS
PLATED GOLD (0.15μm MIN) OVER NICKEL (HIGH PHOS 2 μm MIN)

CENTER CONTACT: BERYLLIUM COPPER
PLATED GOLD (0.15μm MIN) OVER NICKEL (HIGH PHOS 2 μm MIN)

INSULATOR: PTFE



SCREW: 12.9 ALLOY STEEL

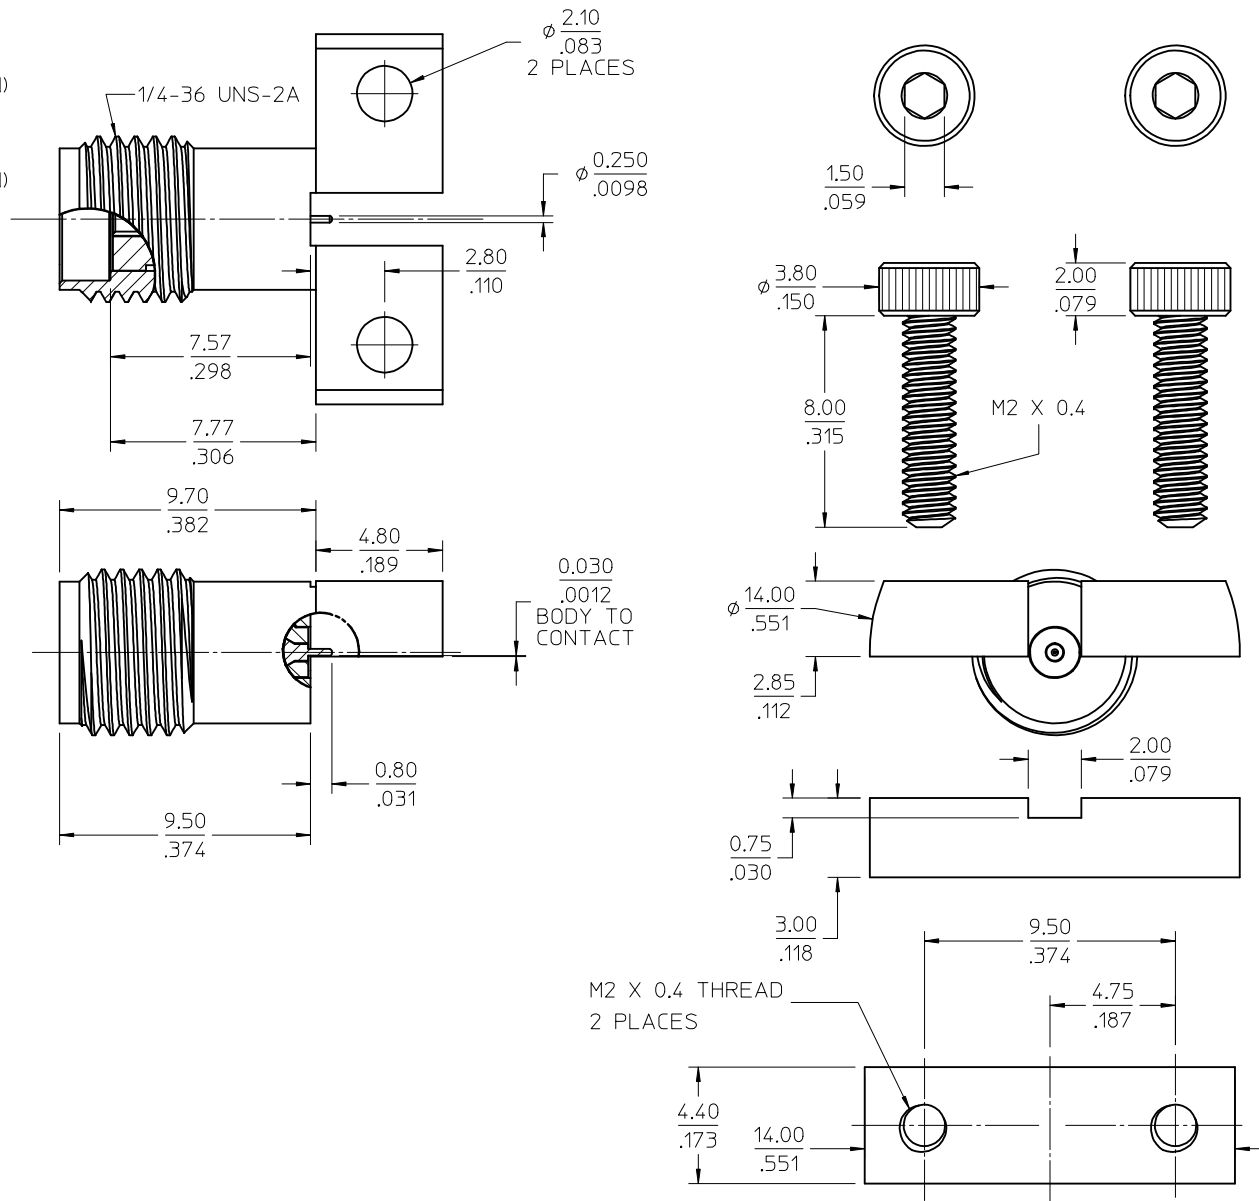

PART # 73251-4710

PS-89675-3460	PRODUCT SPECIFICATION
MIL-STD-348A, FIG. 310-2	INTERFACE
SPECIFICATION	DESCRIPTION

CHG: RELEASE DRAWING EC NO: URF2014-0136 DRWN: AROBERTSON 2013/08/30 CHKD: SSS 2013/08/30 APPR: JWIENER 2013/09/12	REV DESCRIPTION 0 0 0	QUALITY SYMBOLS 0 0 0	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ± .005 3 PLACES ± .005 2 PLACES ± .005 1 PLACE ± .005 ANGULAR ± 2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM/IN DRAWN BY AROBERTSON CHECKED BY SSS APPROVED BY JWIENER MATERIAL NO. 732514710	SCALE DESIGN UNITS INCH TITLE SMA J EDGE LAUNCH FR PCB SCREW MOUNT SMA-J/PCB, EWR-4893 MOLEX INCORPORATED DOCUMENT NO. SD-73251-471	SHEET NO. 1 OF 2

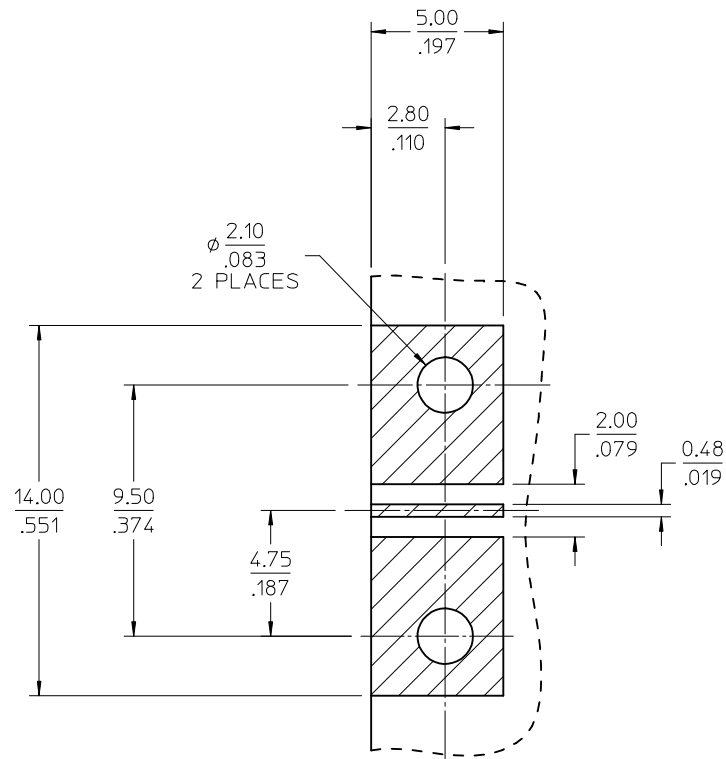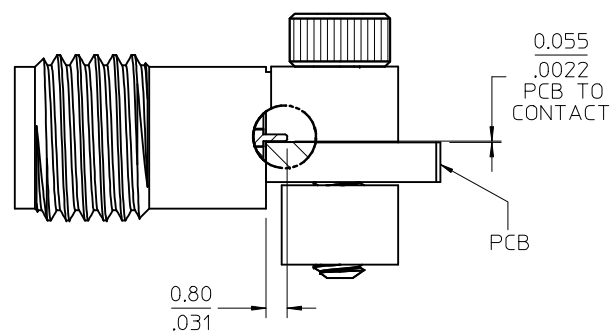

CHG: SEE SHEET 1. EC NO: URF2014-0136 DRAWN: AROBERTSON 2013/08/30 CHKD: SSS 2013/08/30 APPR: JWIENER 2013/09/12	REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
						MM/IN			INCH			
				▽=0 ▽=0 ▽=0	4 PLACES	±---	±---	DRAWN BY AROBERTSON	DATE 2012/02/09	TITLE SMA J EDGE LAUNCH FR PCB SCREW MOUNT SMA-J/PCB, EWR-4893		
					3 PLACES	±---	±---				CHECKED BY SSS	DATE 2012/02/09
					2 PLACES	±---	±---					
					1 PLACE	±---	±---					
					ANGULAR ± 2 °		APPROVED BY JWIENER					
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO. 2 OF 2		
						SEE SHEET 1		SD-73251-471				
				A				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				