

MATERIALS AND FINISHES





BODY BRASS
PLATED SEE TABLE

CENTER CONTACT BERYLLIUM COPPER
PLATED GOLD

INSULATOR TEFLON


LOCKWASHER PHOSPHOR BRONZE
PLATED SEE TABLE

JAM NUT BRASS
PLATED SEE TABLE

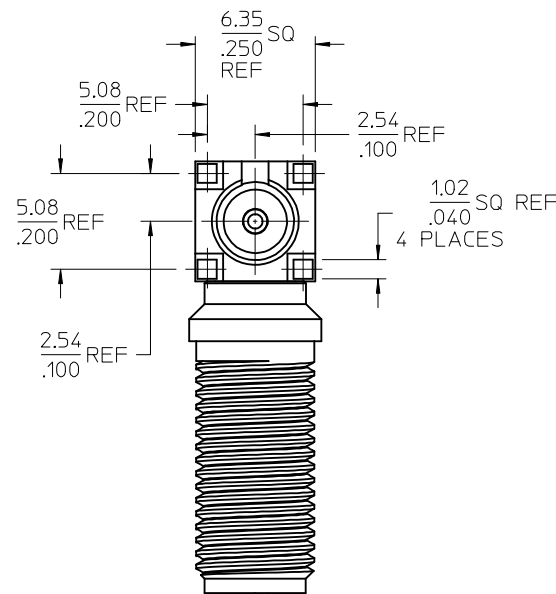
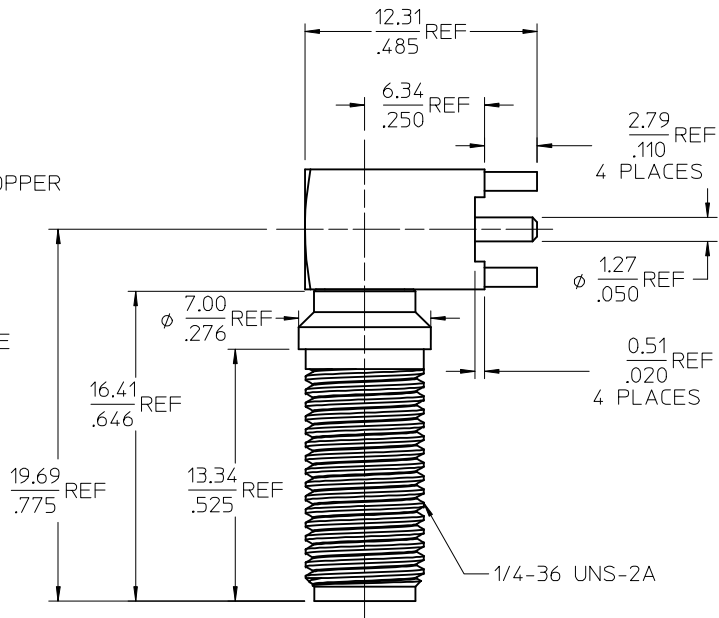


SMA JACK
INTERFACE



RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS 5.20(.205)



JAM NUT



LOCKWASHER

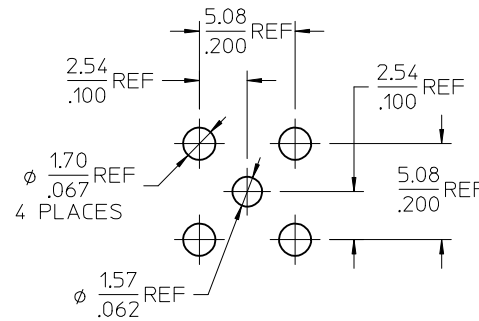

RECOMMENDED PCB HOLE LAYOUT

MIL-STD-348A, FIG. 310.2

INTERFACE

SPECIFICATION

DESCRIPTION

73251-2411	GOLD
73251-2410	NICKEL
PART NO.	PLATING

CHG: DIM 7.00 REF
WAS 7.92 REF
REDREW TO SHOW
REVISED
COMPONENTS

EC NO: URF2007-0474

DRWN:FLAHERTY 2007/05/25

CHKD:SSHAH 2007/05/25

APPR:JWIENER 2007/05/25

REV

A1

QUALITY
SYMBOLS

0=

0=

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0005
3 PLACES	± .005	± .0005
2 PLACES	± .005	± .0005
1 PLACE	± .005	± .0005

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY	DATE
TEF	2004/02/20
CHECKED BY	DATE
SSS	2004/02/20
APPROVED BY	DATE
JDW	2004/02/20

SEE TABLE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE DESIGN UNITS
METRIC

TITLE
SMA JACK, BULKHEAD, R/A
PCB, EWR-2353, 50 OHMS
SMA-J/BLK/RA

MOLEX MOLEX INCORPORATED

DOCUMENT NO. SD-73251-241

SHEET NO. 1 OF 1