


92

- > Premium stainless steel resists most chemicals, salts and acids
- > Used in the chemical, pharmaceutical and electrical industries
- > 80% anti-magnetic (20% magnetic due to weld during manufacturing)
- > Needle-point tips offer extra-fine gripping on very small components and wire
- > 92 91 02 and 92 91 03 have a cross over design








92 21 03 and 92 21 06

92 31 01 and 92 91 03

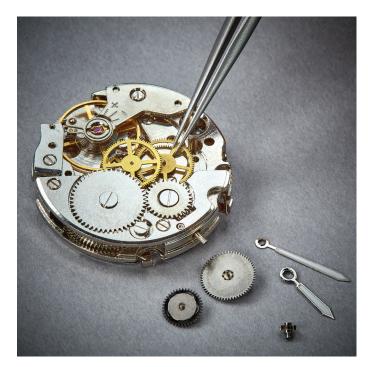





	Product Number	Length	Width	Height	Finish	Style	Gripping Surface	Tip (A)	Tip (B)
KHIPEX 52 21 02	92 21 02	4 3/8"	3/8"	7/16"	premium stainless steel, 80% anti-magnetic, acid resistant	straight	smooth	0.12 mm	0.18 mm
RNIPEX 22 21 GG	92 21 03	4 3/8"	3/8"	7/16"	premium stainless steel, 80% anti-magnetic, acid resistant	straight	smooth	0.06 mm	0.12 mm
Matter to 24.04	92 21 04	3 1/2"	5/16"	3/8"	premium stainless steel, 80% anti-magnetic, acid resistant	straight	smooth	0.09 mm	0.15 mm
Harries of 21 or	92 21 05	2 3/4"	1/4"	5/16"	premium stainless steel, 80% anti-magnetic, acid resistant	straight	smooth	0.10 mm	0.20 mm
FHIDE 12 71 00	92 21 06	3 1/8"	1/4"	5/16"	premium stainless steel, 80% anti-magnetic, acid resistant	straight	smooth	0.08 mm	0.13 mm
[MIDER 52.91.0]	92 31 01	4 3/4"	3/8"	7/16"	premium stainless steel, 80% anti-magnetic, acid resistant	45° angled	smooth	0.09 mm	0.16 mm
PRIDATE OF STATE	92 91 02	4 3/4"	3/8"	7/16"	premium stainless steel, 80% anti-magnetic, acid resistant	straight	smooth	0.12 mm	0.20 mm
KNIPEX 52 St. CS School St. Company	92 91 03	4 1/2"	3/8"	7/16"	premium stainless steel, 80% anti-magnetic, acid resistant	45° angled	smooth	0.22 mm	0.25 mm