

PART NO.	A28100-031	REV	ECO	DATE	APP
		G	96463	01-30-10	TLM

ALUMINUM 6061-T6, NICKEL
PLATE PER AMS-C-26074

LIQUID CRYSTAL POLYMER (LCP)
PER ASTM D5138






BERYLLIUM COPPER PER ASTM
B194, C17200, GOLD PLATED
PER ASTM B488, (HARD GOLD)
TYPE II CODE C, CLASS 1.27

SOLDER COATED WITH SN63A PER
J-STD-006 OR AMS-P-81728

1 AMP MAX PER MIL-DTL-32139

71 MILLIOHM MAX (71mV DROP
MAX) @ 1.0 AMPS PER MIL—
DTL-32139

PRODUCT FAMILY TESTED TO AND
PASSED THE PERFORMANCE
SPECIFICATIONS OF TABLE VIII OF
MIL-DTL-32139

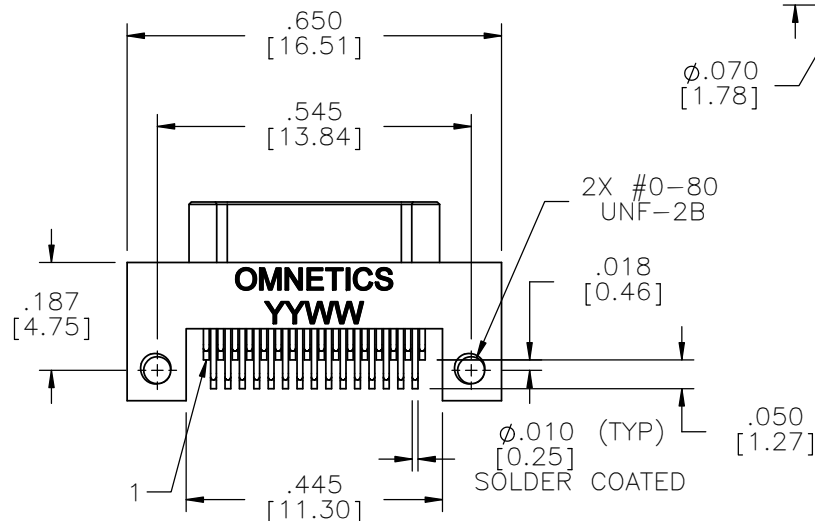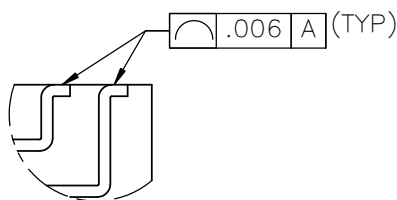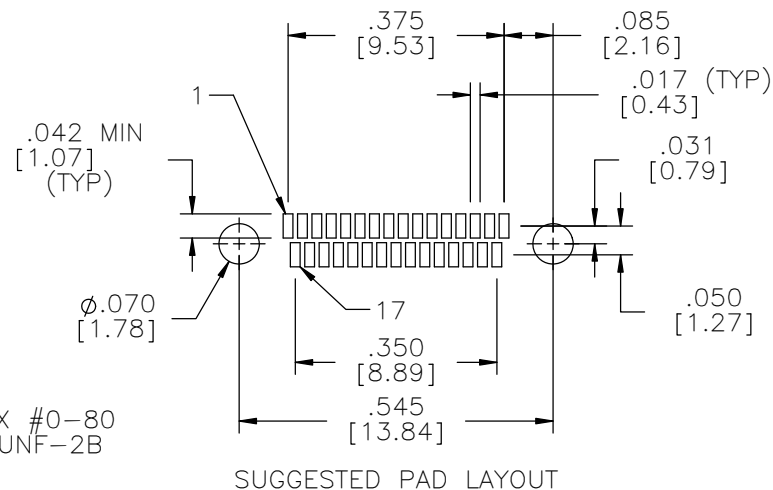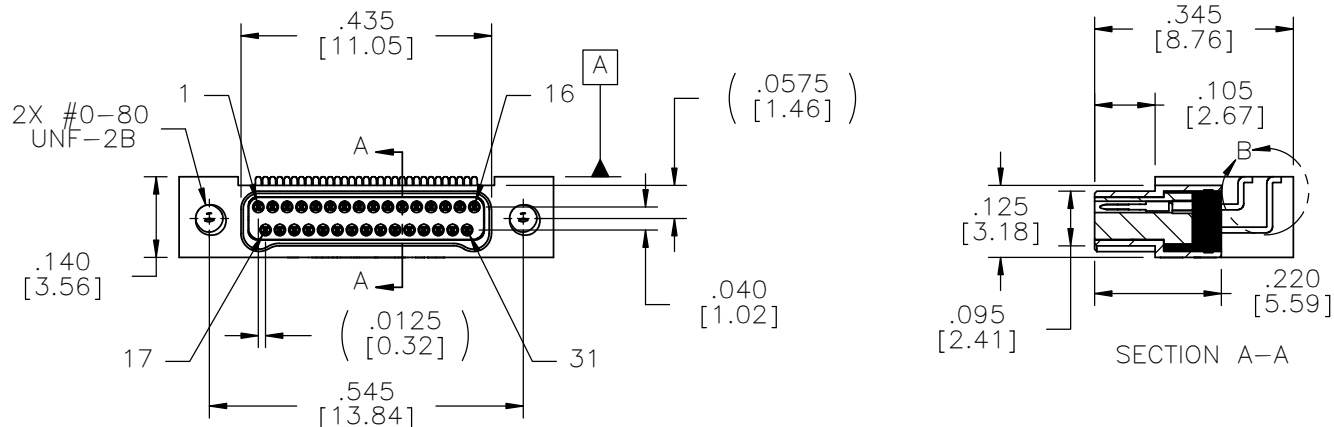

ACTUAL SIZE

DETAIL B
SCALE 6 : 1

MNP0 SLDW	THIRD ANGLE -TOLERANCES- UNLESS OTHERWISE NOTED		THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.		OMNETICS CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873		
	DIMENSIONS IN INCHES		DFTM. AAS	DATE 05-05-04		TITLE: (31) PIN MALE Bi-Lobe® CONNECTOR	DWG NO. A28100-031	
	2 PL DEC±.01 3 PL DEC±.005 4 PL DEC±.0005 ANGLES ± 1°		CHK'D.	DATE			SHEET 1 OF 1	REV G
			APP'D.	DATE			SCALE: 3:1	