

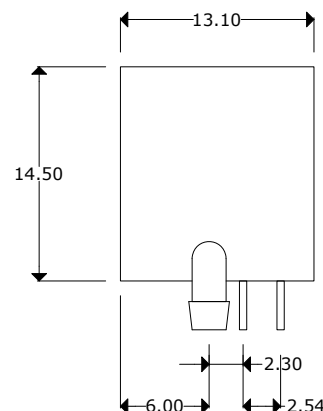
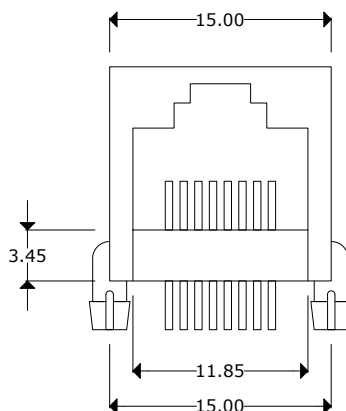


SCNRJ - 8 8 SG N N N N - 47 4F SO RTH

SUNTSU	RJ45	CONTACTS 8 : 8	MAGENETIC N : None	EMI Finger N : None	OPERATING TEMP 47 : -40~70°C	CONTACT TERMINATION SO : SOLDER	MOUNTING STYLE RTH : Right Angle Through Hole
CONNECTOR		POSITIONS 8 : 8	CONTACT PLATING SG : Selective Gold Plating	SHIELD N : None	LED COLOR N : None	HEIGHT 4F : 14.5mm	



PC Board Layout

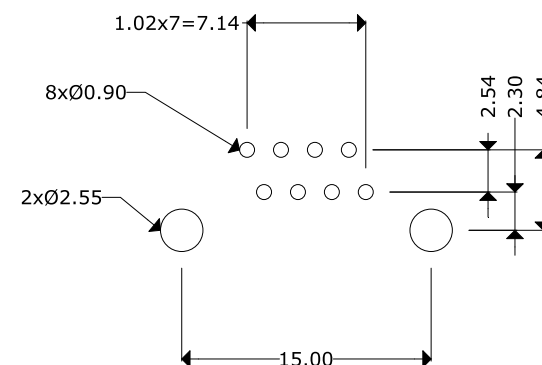

Electrical Parameters

Voltage Rating: 125V
 Current Rating: 1.5A
 Contact Resistance: 30mΩ Max
 Insulation Resistance: 500MΩ/min.
 Dielectric Withstanding Voltage: 1000V

Materials

Housing: PBT, UL94V-0
 Insert: PBT, UL94V-0
 Conductor: Stamping Pin, Phosphor Bronze
 Plating: 6" Gold plated over nickel

Remarks:
 Operating Life: 750 Cycles MIN.



RJ45 JACK SIDE ENTRY

Document History				Part No.	Drawn
Edits Made	Date	Edited By	Approved By	Scale	Tolerance
Initial Release	10/22/2021	B. Gibbons	KH Mun	SCNRJ-88GGNNNN-474FSORTH	B. Gibbons 10/22/2021
				Unit	Unless otherwise stated, tolerances are .x±0.25
					Pages
				mm	1/1