

5

4

3

2

1

NOTES:

1. MATERIALS AND FINISHES:
MCX STR PLUG - BeCu, GOLD PLATING


AMC RA PLUG:
HOUSING - PBT, BLACK
CONTACT & GROUND CONTACT - PHOSPHOR BRONZE, GOLD PLATING

CABLE - 1.13 MM CABLE

2. ELECTRICAL:
A. IMPEDANCE: 50 OHM

3. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 95-900-560-XXX AND DATE CODE"

SCALE 1.500

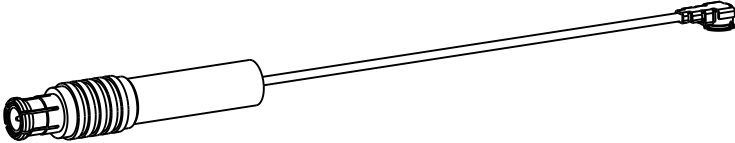

LENGTH 'L' (SEE TABLE)

HEAT SHRINK TUBE

12.70±1.27
[0.500±0.050]

INTERFACE PER MCX PLUG

INTERFACE PER AMC PLUG

LENGTH TABLE

PART NUMBER (IMPERIAL)	LENGTH AND TOLERANCE 'L' IN MM (INCHES)
95-900-560-050	50.00 ± 3.81 [1.969 ± 0.150]
95-900-560-100	100.00 ± 3.81 [3.937 ± 0.150]
95-900-560-150	150.00 ± 3.81 [5.906 ± 0.150]
95-900-560-200	200.00 ± 5.08 [7.874 ± 0.200]
95-900-560-250	250.00 ± 5.08 [9.843 ± 0.200]
95-900-560-300	300.00 ± 5.08 [11.811 ± 0.200]

DESIGN REQUIREMENTS:

☒ FREQUENCY: DC - 6 GHz

☐ VSWR: ____ MAX.

☐ INS. LOSS: ____ dB MAX.

☒ CONTINUITY

☒ HI-POT: 200 VRMS

☐ OTHER:

THIRD ANGLE PROJ.

REFERENCE

EAR#
11007

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE METRIC [INCHES] AND TOLERANCES ARE:
<0.5mm = ±0.05mm [$<0.020 = \pm 0.002$]
>0.5 - 6mm = ±0.1mm [$>0.020 - 0.236 = \pm 0.004$]
>6.00 - 30mm = ±0.2mm [$>0.236 - 1.181 = \pm 0.008$]
>30.00 - 120mm = ±0.3mm [$>1.181 - 4.725 = \pm 0.012$]

ANGLES = ±1°

MATERIAL

SEE NOTES

ENGR.1
MADHAN G

ENGR.2

DATE
27-OCT-21

TITLE
MCX STR PLUG TO
AMC RA PLUG
USING 1.13 MM CABLE
VARIOUS LENGTH

SHEET NO. 2 OF 2

SCALE: 5.4:1.0

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

Amphenol RF

SIZE
B

DRAWING NO. 95-900-560-XXX

ITEM NO. 95-900-560-XXX

PART NO. 95-900-560-XXX

REV
A

5

4

3

2

1