


RB1881 Series

182 x 171 x 82mm (7.2 x 6.7 x 3.2 in)

- 24V, 48V
- Ball bearings
- 137 CFM
- Frame and Impeller: Aluminum
- Lead Wires: UL (+) Red; (-) Black
- Operating temperature: -10°C ~ +70°C
- Operating life: 50,000 hours
- UL, cUL, CE Listed
- RoHS Compliant



Model Number	V	Range (V)	A	RPM	CFM	m ³ /min	mmAq	inH ₂ O	dBA
RBH1881B2	24	12.0~27.6	2.2	2000	136.8	3.87	63.8	2.51	63
RBH1881B4	48	24.0~55.2	1.1	2000	136.8	3.87	63.8	2.51	63

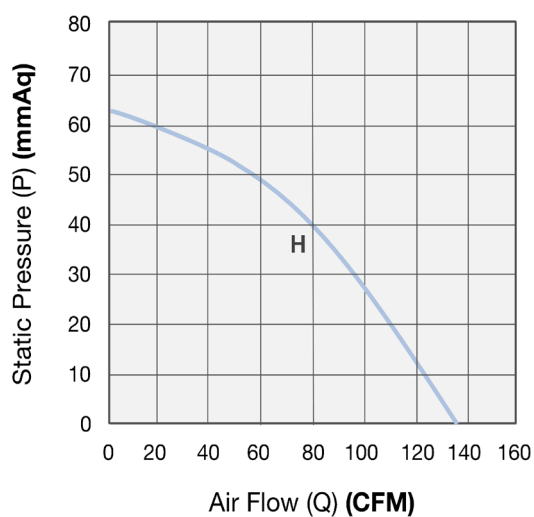

Optional Features	Inrush Current Protection	Autostart	Tachometer	Rotation Detector	Life Detection	Over Voltage Protection	VPWM	IPWM	PPWM	TPWM	RPWM	Current Limit Control	Constant Speed	IP56	IP67
	☐	☐	☒	☒	☐	☐	☐	☐	☒	☐	☐	☐	☐	☐	☐