



Connector Location A

Connector Location B

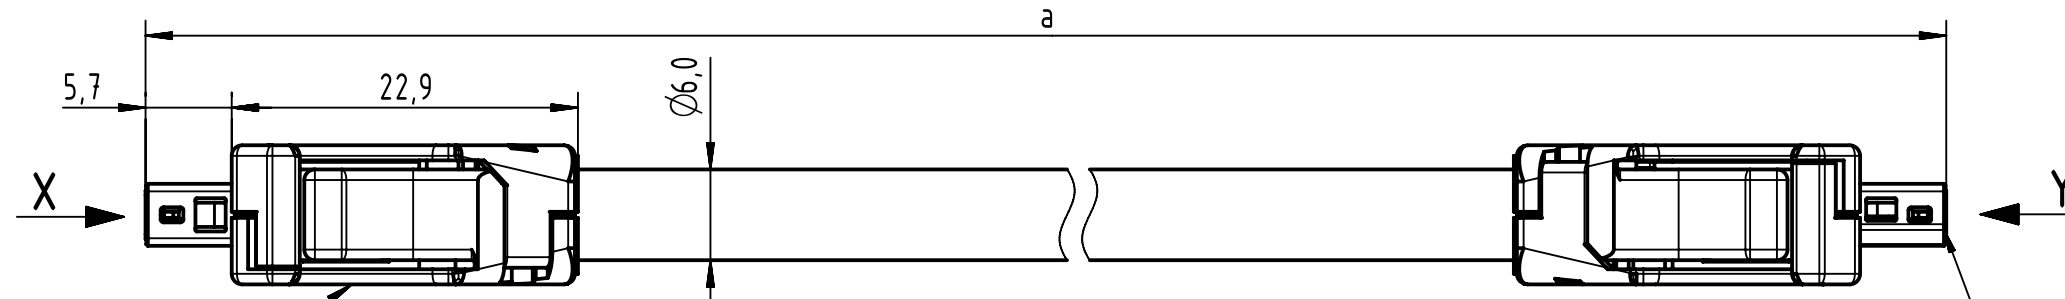

HARTING ix Industrial Cat. 6A,
10-pole, Type A Solder (IP20)




Mating face acc. to IEC 61076-3-124

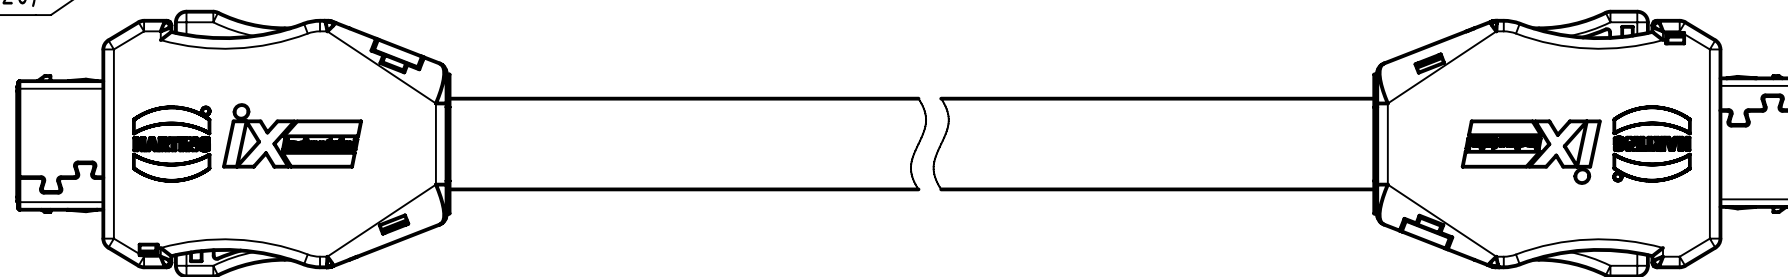

X
male


Loading Plan
acc. to TIA/EIA 568B

Y
male

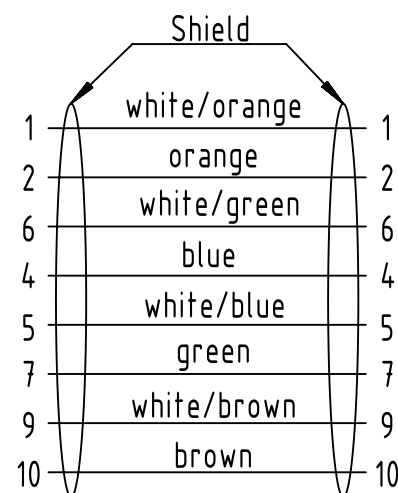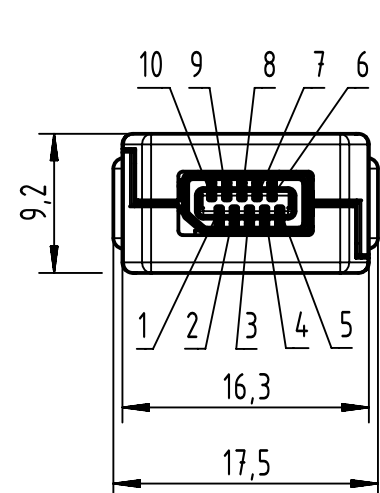

Contacts 3 and 8
are not connected
on both sides

- Temperature range: -40°C ... +80°C
- Contact material: copper alloy
- Contact area: Gold 0.2µm min.

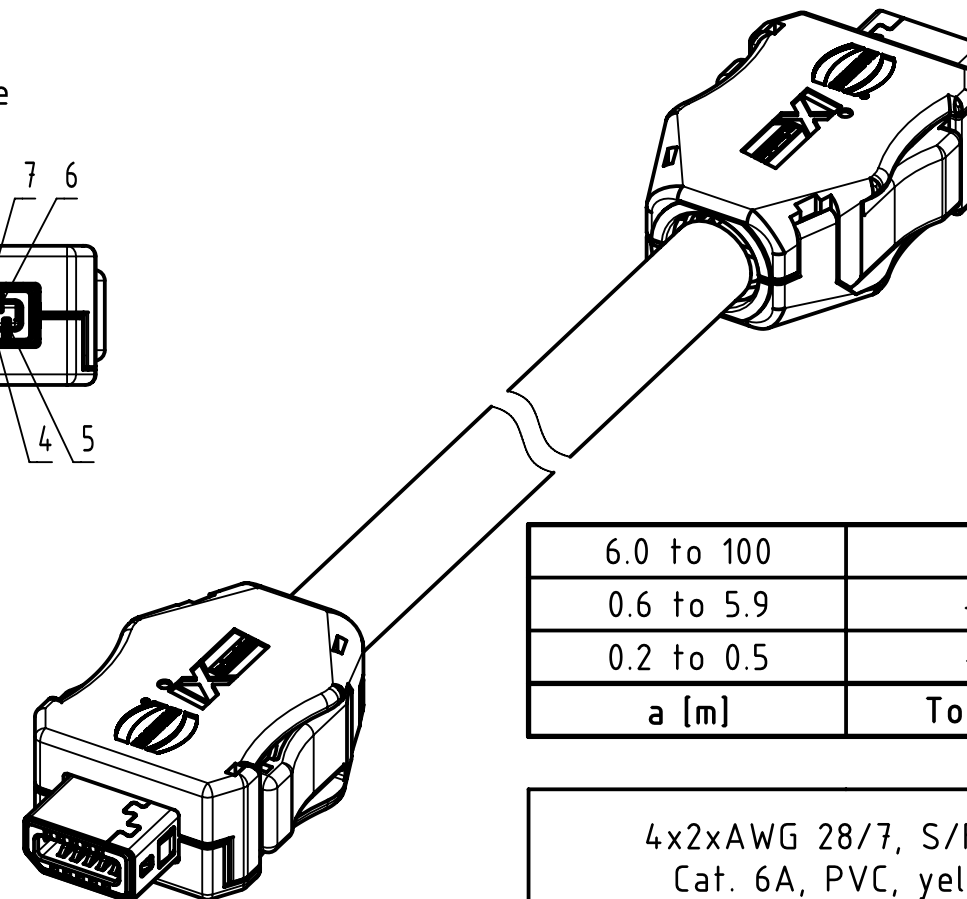

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

4x2xAWG 28/7, S/FTP,
Cat. 6A, PVC, yellow

33480606830XXX

Type of cable

Part no.

NOTE:

- * For lengths < 1.0m:
- relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30°
- * For lengths ≥ 1.0m:
- relative positioning of the connectors to each other not obligatory

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved		Created by STOCHECIC Stochechi		Inspected by COSTEA Costea		Standardisation MUNTEANV Muntean	
Department HCS - RO		Date 2021-07-26		State Final Release		Doc-Key / ECM-Nr. 100960324/UGD/000/A 500000200095	
HARTING Customised Solutions D-32339 Espelkamp		Title ix Industrial Type A AWG28 Cat6A PVC		Type TB		Number 33480606830XXX	
				Rev. A		Page 1/1	