


6		5	4	3	2	1
PART NUMBER		TITLE		CABLE DESCRIPTION	LENGTH 'L'	CABLE COLOR
2163011122		MX150 F-S 150MM 14 AWG LEADS BK Sn		14AWG DISC PVC BK TXL BALAJI	150±5	BLACK
2163011123		MX150 F-S 225MM 14 AWG LEADS BK Sn		14AWG DISC PVC BK TXL BALAJI	225±5	BLACK
2163011124		MX150 F-S 300MM 14 AWG LEADS BK Sn		14AWG DISC PVC BK TXL BALAJI	300±5	BLACK
2163011125		MX150 F-S 450MM 14 AWG LEADS BK Sn		14AWG DISC PVC BK TXL BALAJI	450±5	BLACK
2163011126		MX150 F-S 600MM 14 AWG LEADS BK Sn		14AWG DISC PVC BK TXL BALAJI	600±6	BLACK
2163012122		MX150 F-S 150MM 14 AWG LEADS RD Sn		14AWG DISC PVC RD TXL BALAJI	150±5	RED
2163012123		MX150 F-S 225MM 14 AWG LEADS RD Sn		14AWG DISC PVC RD TXL BALAJI	225±5	RED
2163012124		MX150 F-S 300MM 14 AWG LEADS RD Sn		14AWG DISC PVC RD TXL BALAJI	300±5	RED
2163012125		MX150 F-S 450MM 14 AWG LEADS RD Sn		14AWG DISC PVC RD TXL BALAJI	450±5	RED
2163012126		MX150 F-S 600MM 14 AWG LEADS RD Sn		14AWG DISC PVC RD TXL BALAJI	600±6	RED

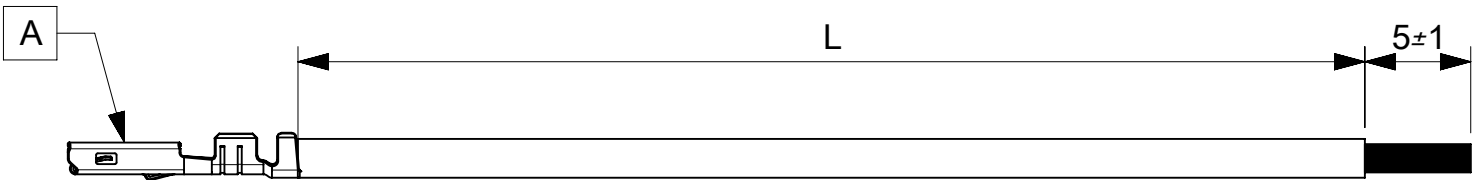

NOTES:
1. CRIMPING TO BE DONE AS PER MOLEX STANDARDS.
2. THE PRODUCT SPECIFICATION RELIES ON TERMINAL AND WIRE SPEC.
3. FREE END MUST BE STRIPPED, TWISTED & TINNED. THE LENGTH OF TINNING IS 5±1MM. TINNING DIA MUST BE 2.2MM MAX.

ITEM	PART#	DESCRIPTION	QTY	UOM
A	330123001	MX150 RCPT 0.3 TIN 14/16AWG D WIND SLD	1	PC

REVISION			
DATE	REV	DESCRIPTION	CHANGER
05/01/2021	A	INITIAL RELEASE	ARAJU

DOCUMENT STATUS	P1	RELEASE DATE	2021/01/06	05:07:51
-----------------	----	--------------	------------	----------

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
	DIMENSION UNITS	SCALE
	mm	NTS
	GENERAL TOLERANCES (UNLESS SPECIFIED)	
DIVISIONAL SYMBOLS	ANGULAR TOL	± °
	4 PLACES	±
	3 PLACES	±
	2 PLACES	±
	1 PLACE	±
	0 PLACES	±
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION
		DRAWING
	SERIES	216301
	MATERIAL NUMBER	SEE TABLE
	CUSTOMER	GENERAL MARKET
	SHEET NUMBER	1 OF 1