



soberton inc.

ELECTRO  
MAGNETIC  
BUZZER

Acoustic Product Specification

Product Number: ST-025BHT



Release | Revision: A / 2022

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1  
Specifications  
  
Dimensions

Page 2  
Reliability Test

Page 3  
Electrical And Acoustical Measuring Condition  
  
Typical Frequency Response Curve

Page 4  
Surface Mounting Condition  
  
Soldering Pattern

Page 5  
Packing

Specifications


| Item                                | Unit | Specifications                                                |
|-------------------------------------|------|---------------------------------------------------------------|
| Rated Voltage                       | Vo-p | 3.6                                                           |
| Operating Voltage                   | Vo-p | 2.5 ~ 4.5                                                     |
| Rated Current                       | mA   | Max. 100 at 2.731KHz<br>50% duty cycle, square wave, 3.6 Vo-p |
| Sound Output                        | dB   | Min. 82 at 2.731KHz<br>50% duty cycle, square wave, 3.6 Vo-p  |
| Coil Resistance                     | Ω    | 16±3                                                          |
| Resonant Frequency                  | Hz   | 2731                                                          |
| Operating Temperature               | °C   | -20 ~ +70                                                     |
| Storage Temperature                 | °C   | -40 ~ +85                                                     |
| Dimensions                          | mm   | 7.5 x 7.5 x H2.5                                              |
| Housing Material                    |      | Black LCP                                                     |
| Terminal                            |      | SMD                                                           |
| Net Weight                          | gram | Approx. 0.5                                                   |
| Environmental Protection Regulation |      | RoHS 2.0                                                      |

Measuring Condition:

Temperature: 5~35°C Humidity: 45%~85%R.H Atmospheric Pressure: 860 ~1060hPa

Dimensions

Unit: mm  
Tolerance: ±0.3mm, except where specified

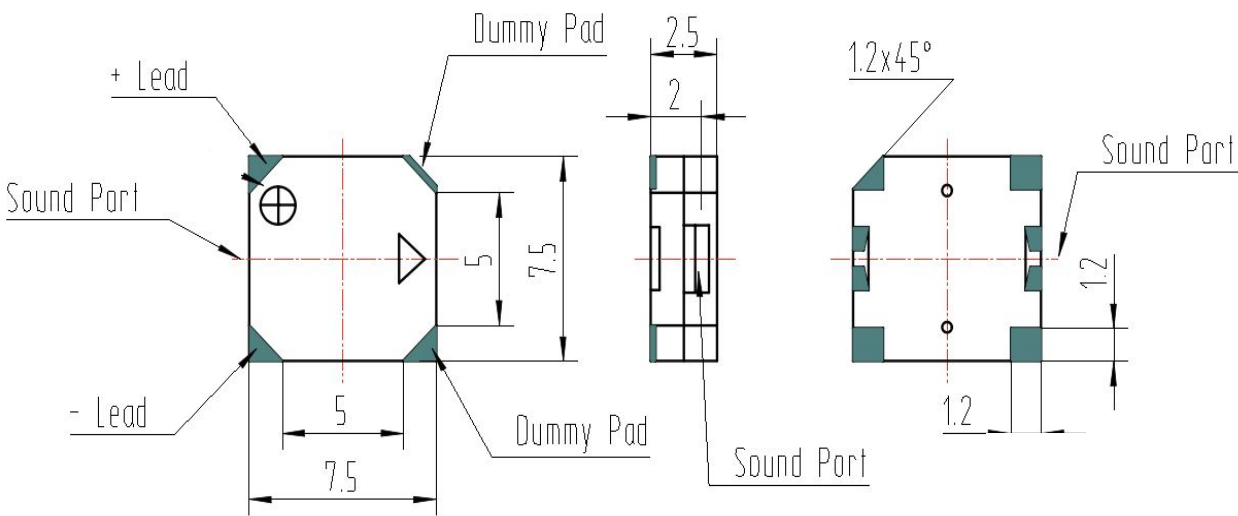

Housing Material: Black LCP  
Terminal Plate: 3 soldering pads, Tin Plating Brass



soberton inc.

ELECTRO  
MAGNETIC  
BUZZER

Acoustic Product Specification

Product Number: ST-025BHT



Release | Revision: A / 2022

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1  
Specifications

Dimensions

Page 2  
Reliability Test

Page 3  
Electrical And Acoustical Measuring Condition

Typical Frequency Response Curve

Page 4  
Surface Mounting Condition

Soldering Pattern

Page 5  
Packing

Reliability Test

After any of the following tests the part shall meet specifications without any degradation in appearance and performance except SPL. SPL shall meet the specifications and shall not deviate more than -10dB from the initial value.

Standard Temperature Life Test

The part shall be subjected to 96 hours at 25±10°C.

Input rated voltage: 3.6 Vo-p

Resonant frequency: 2731Hz, 50% duty cycle, square wave.

High Temperature Test

The part shall be capable of withstanding a storage temperature of +85°C for 96 hours.

Low Temperature Test

The part shall be capable of withstanding a storage temperature of -40°C for 96 hours.

Humidity Test

Temperature +40°C±3°C

Relative Humidity 90% ~ 95%

Duration 48 hours and exposure to room temperature for 6 hours

Temperature Shock Test

Per cycle  
60°C/1 hour → 25°C/3 hours → -20°C/1 hour → 25°C/3 hours

Total cycle 10 cycles

Drop Test

Standard Packaging from 75cm

Drop on hardwood or board of 5cm thick, three sides, six plain

Vibration Test

Vibration 1000 cycles/min.

Amplitude 1.5mm

Duration 1 hour in each 3 axes

Reflow Test

- Use recommended reflow soldering condition
1. No abnormality should be found after reflow
  2. Good soldering to meet soldering requirements

Note

Please make sure that any foreign materials (e.g. magnetic powder, washing solvent, flux, corrosive gas) do not enter this product in your production processes. Contamination may result in a loss of some or all audio output.



soberton inc.

ELECTRO  
MAGNETIC  
BUZZER

Acoustic Product Specification

Product Number: ST-025BHT



Release | Revision: A / 2022

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1  
Specifications

Dimensions

Page 2  
Reliability Test

Page 3  
Electrical And Acoustical Measuring  
Condition

Typical Frequency Response Curve


Page 4  
Surface Mounting Condition

Soldering Pattern


Page 5  
Packing

Electrical And Acoustical Measuring Condition

**Recommended Driving Circuit**  
Resonant frequency, 50% duty cycle, square wave.  
Signal amplitude should be large enough to saturate the transistor.

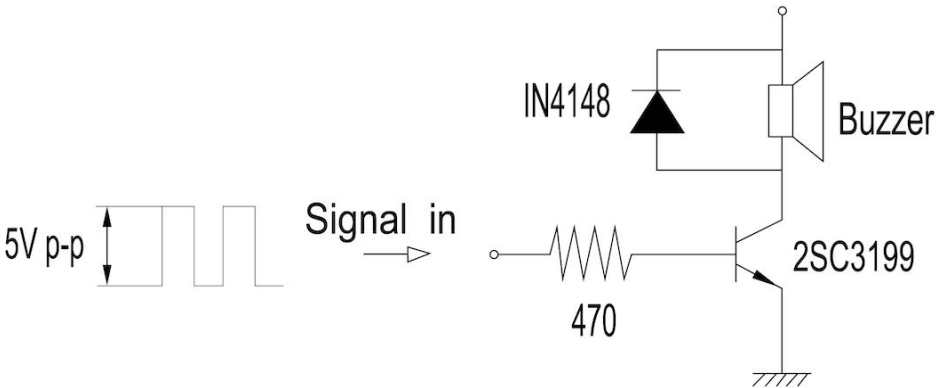


Recommended Setting

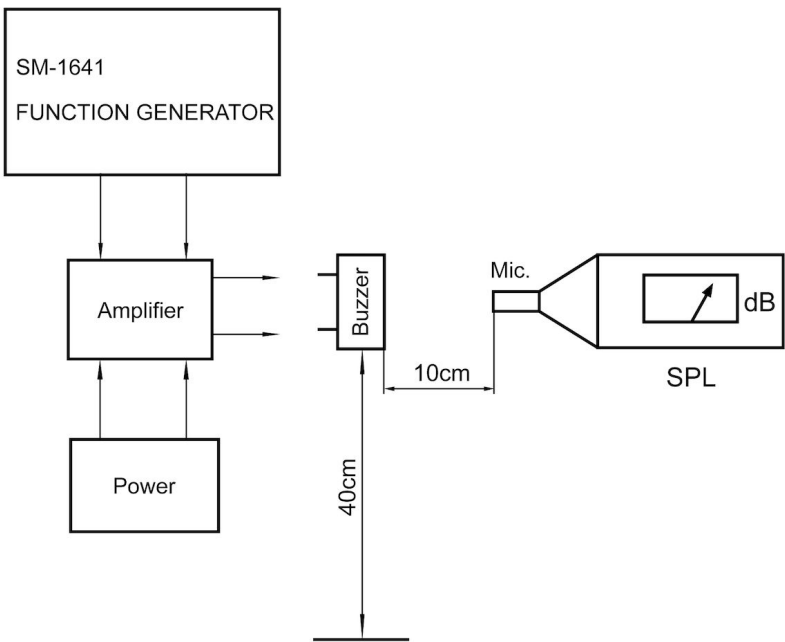

Typical Frequency Response Curve

3.6 Vo-p , 50% duty cycle, square wave,10cm

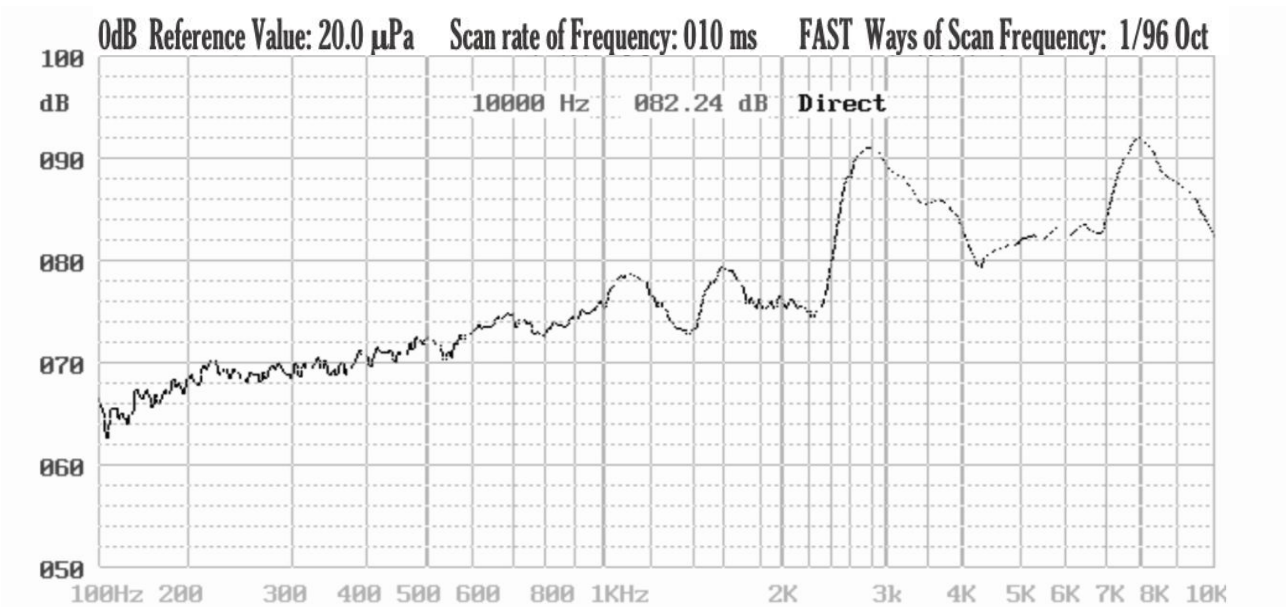



soberton inc.

ELECTRO  
MAGNETIC  
BUZZER

Acoustic Product Specification

Product Number: ST-025BHT



Release | Revision: A / 2022

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1  
Specifications

Dimensions

Page 2  
Reliability Test

Page 3  
Electrical And Acoustical Measuring  
Condition

Typical Frequency Response Curve


Page 4  
Surface Mounting Condition

Soldering Pattern

Page 5  
Packing


Surface Mounting Condition

Reflow Soldering  
Recommended reflow soldering condition is as follows.

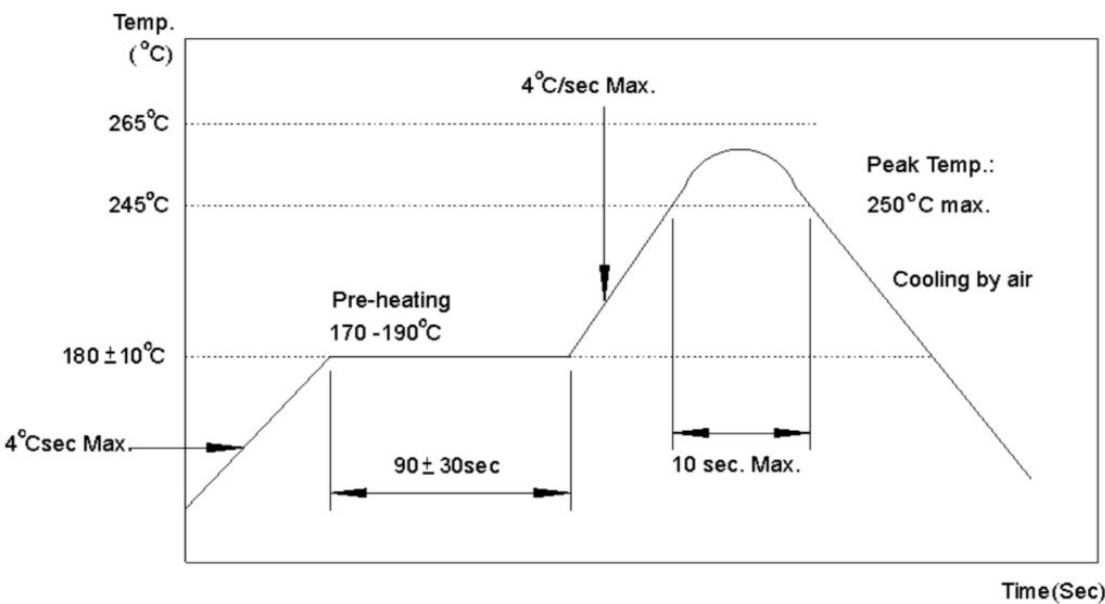

- Note
1. In automated mounting of the SMD sound transducers on PCB, any bending, expanding and pulling forces or shocks against the SMD sound transducers shall be kept minimum to prevent them from electrical failures and mechanical damage of the devices.
  2. In the reflow soldering, soldering temperatures that are above specification and extreme gradients such as rapid heating or cooling may cause electrical failures and mechanical damage of the devices.

Soldering Pattern

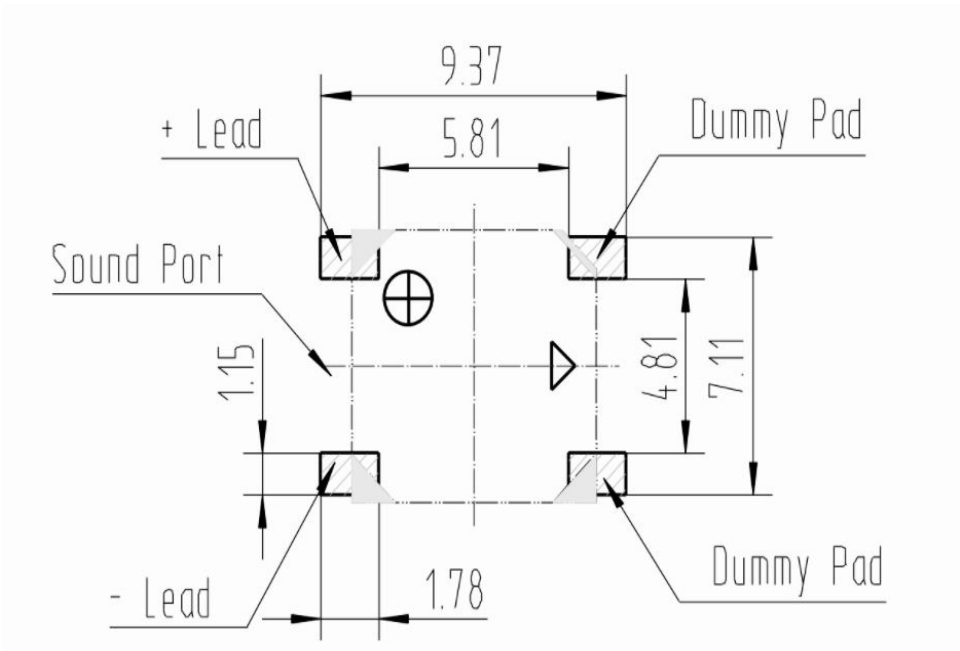

Terminal Plate: 3 soldering pads, Tin Plating Brass



# ELECTRO MAGNETIC BUZZER

## Acoustic Product Specification

**Product Number: ST-025BHT**



## CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

## Page 1

## Specifications

## Dimensions

## Page 2

### Reliability Test

## Page 3

### Electrical And Acoustical Measuring Condition

### Typical Frequency Response Curve

## Page 4



## Surface Mounting Condition

## Soldering Pattern

## Page 5

## Packing

## Packing

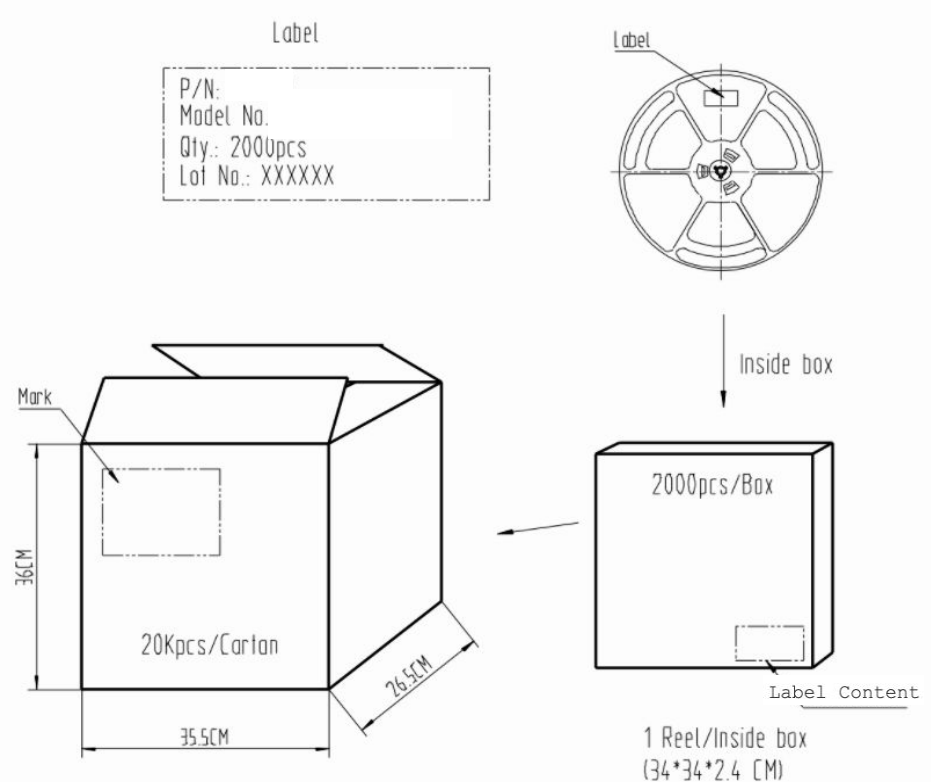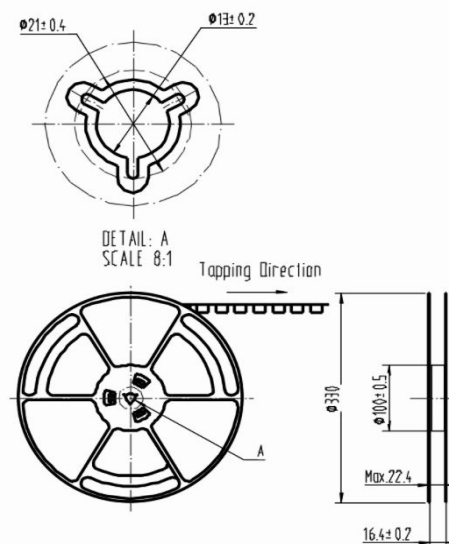**Packing Order:**

- 1. Per Reel: 2,000pcs**  
**2. Per Carton: 10 Reels**  
**3. Per Carton: 20,000pcs**  
**4. Carton Size: 35.5x26.5x36cm**