


REVISION INFORMATION			
Rec.	Rec. Date	Modified By	Brief Description

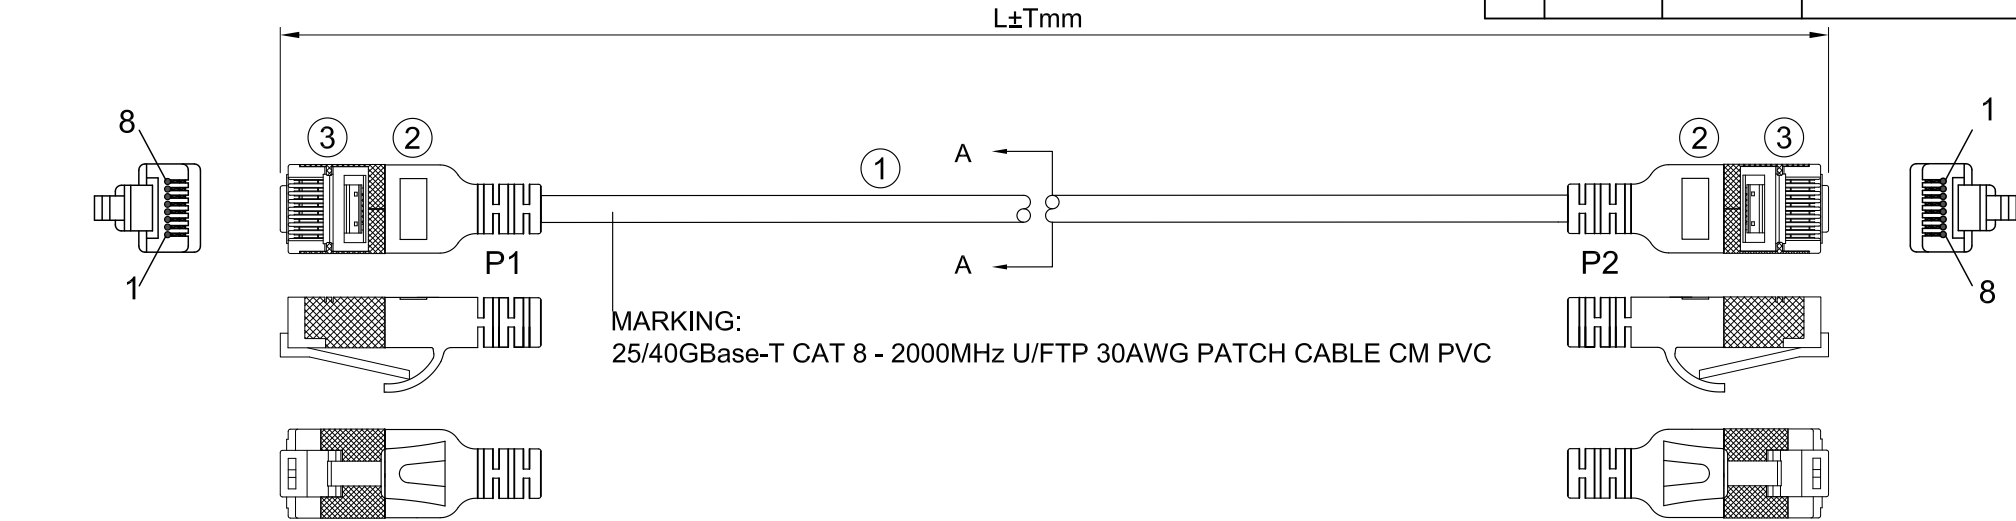

SEC:A-A

JACKET:PVC Thickness:0.65±0.1mm
OD=4.5±0.15mm
CONDUCTOR:30AWG(7/0.10±0.008mmBC)*4P
INSULATION:HDPE Thckness:0.3±0.05mm
OD=0.8±0.05mm
AL/MYLAY
DRAIN:28AWG(7/0.127TC)

orange 1 white/orange	green 2 white/orange
blue 3 white/blue	brown 4 white/brown

PINOUT		
P1	WIRE	P2
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
6	GREEN	6
5	WHITE/BLUE	5
4	BLUE	4
7	WHITE/BROWN	7
8	BROWN	8
S	SHIELDED	S

L(ft)	T(inch)	T(%)
0.5	±1.2	20%
1	±1.2	10%
2	±1.2	5%
3	±1.2	3.33%
5	±1.2	2%
7	±2	2.38%
10	±2	1.67%

③	RJ45 PLUG	8P8C 50U" GOLD PLATED TWO-PIECE TRANSPARENT BLACK PLUG; NICKEL-PLATED SHELL		
②	MOLDED	PVC MOLDED BOOT		
①	CABLE	CAT8 U/FTP [30AWG(7/0.10BC)+AL/MYLAY]*4+DRALN(7/0.127TC) OD=Ø4.5±0.15MM		
NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT

