

SUNTSU

CONNECTOR

BNC

Rows






Connector Type
Jack

Connectors
per Row

Impedance
50

Contact Termination
Solder

Mounting Style
Right Angle
Bulkhead PCB
Mount

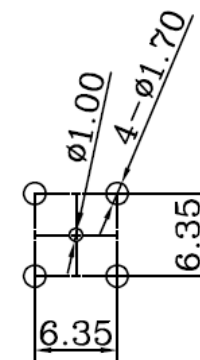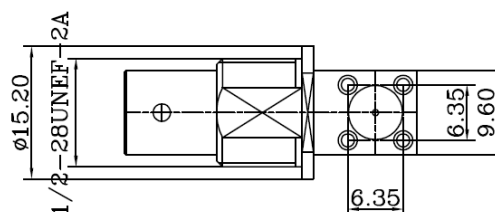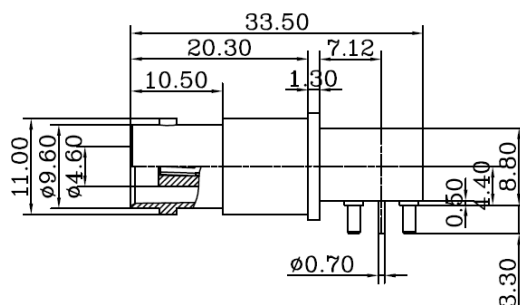

Recommended Mounting Layout

1. Materials:
 - a) Body: Zinc Nickel Plated
 - b) Contact: Brass Nickel Plated
2. Normal Impedence: 50Ω
3. Frequency Range: 0-4 GHz
4. Max Peak Voltage: 500V
5. Dielectric Strength: 1500V RMS
6. Insulation Resistance: 5000MΩ/Min



BNC FEMALE BULKHEAD PCB
MOUNT 90°

Document History				Part No.	Drawn
Edits Made	Date	Edited By	Approved By		
Initial Release	03/23/2022	B. Gibbons	KH Mun	SCNBN-J1150-SORBP	B. Gibbons 03/23/2022
				Scale	Tolerance 0.5-15 = ± 0.15 15-30 = ± 0.30 30-120 = ± 0.60 >120 = ± 1.00
				Unit	Pages
				mm	1/1