

1. MECHANICAL DIMENSIONS :

REV.	DATE	DESCRIPTION
02	Jan. 09, '18	1. UPDATE NOTES 2. UPDATE PROFILE OF WAVE SOLDER
01	Aug. 22, '16	1st RELEASE



NOTES:

1. MATERIAL:
HOUSING: HIGH THERMOPLASTIC, UL94V-0, BLACK
CONTACTS: T=0.35mm PHOS-BRONZE,
6u" GOLD PLATING ON CONTACT AREA,
TIN PLATING OVER NICKEL ON TAILS
SHIELD: COPPER ALLOY, NICKEL PLATING
2. OPERATING TEMPERATURE: -40°C~+85°C
3. INSERTION FORCE: 4 POUNDS MAX.
EXTRACTION FORCE: 4 POUNDS MAX.
4. DURABILITY: 750 MATING CYCLED MIN.
5. CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68, SUBPART F.
6. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

KRM-S-01-6-6-0-9L4

PRODUCT SERIES
KRM: LATCH UP THRU HOLE

SHIELDED
S: SHIELDED

NO. OF PORTS

NO. OF POSITION

NO. OF CONTACT

CONTACT GOLD PLATING OPTION

SERIAL NUMBER

RUNNING CODE

LED COLOR OPTION



PART NO

KRM-S-01-6-6-0-9L4

TITLE

RJ25 6P6C, W/O LED, SHIELDED

REV : 02

UNIT

mm[inch]

DRAWN

CINDY

CHKD

DANIEL

DATE

Jan. 09, '18

SHEET

1 of 2

DWG NO KRM-S-01-6-6-0-9L4

KinnexA, INC. 8F, No. 172, CHENG TEH ROAD SEC. 4, TAIPEI 11167, TAIWAN

Connected
by


KinnexA

PRELIMINARY RELEASE SUBJECT TO CHANGE

※ THIS DRAWING IS A CONTROLLED DOCUMENT ※

RoHS Compliant

2. PROFILE OF WAVE SOLDER :

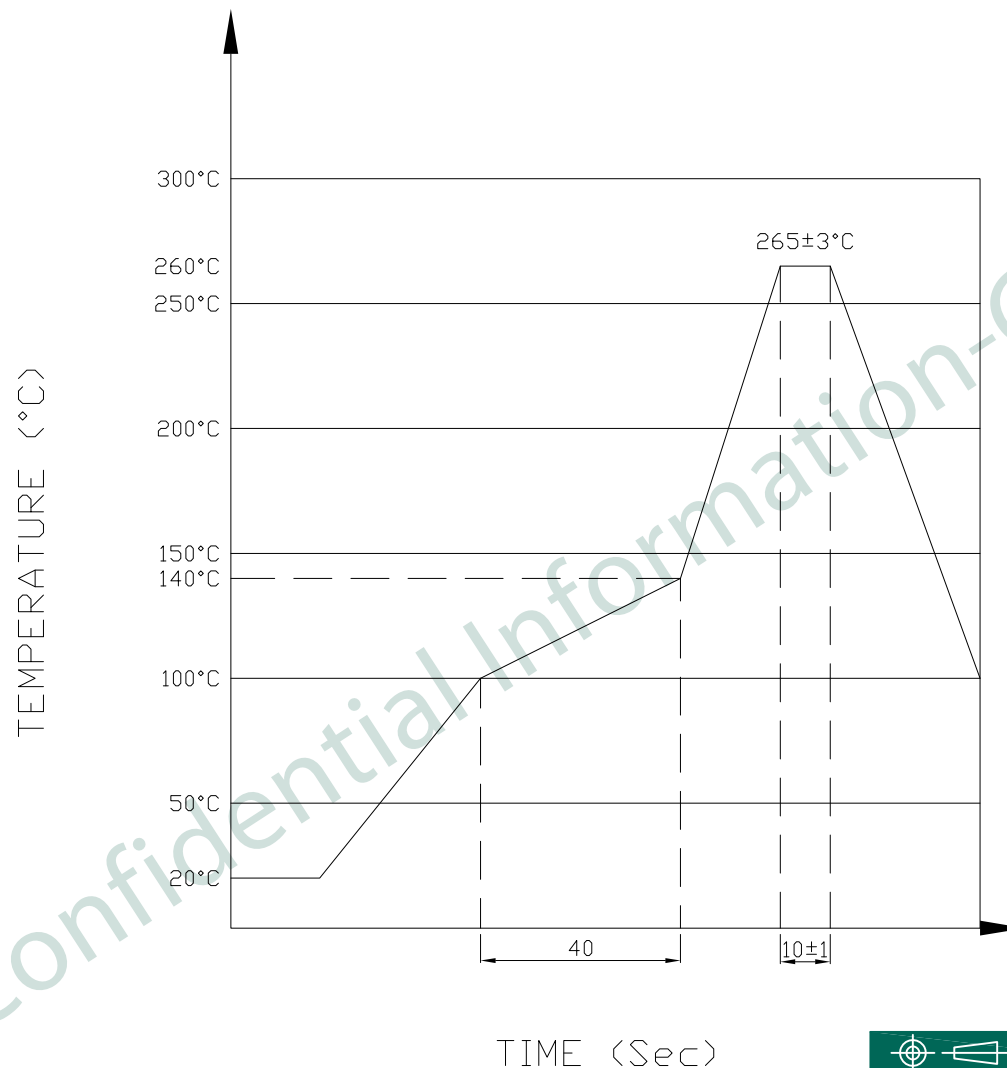

The measuring point for the specified temperature shall be on the soldered part of the lead

PART NO KRM-S-01-6-6-0-9L4				
TITLE	RJ25 6P6C, W/O LED, SHIELDED			
REV : 02				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	DANIEL	Jan. 09, '18	2 of 2