


ELECTRET CONDENSER MICROPHONE


MEU-95PD-01-713-C1033

Unidirectional


Typical frequency response curve:

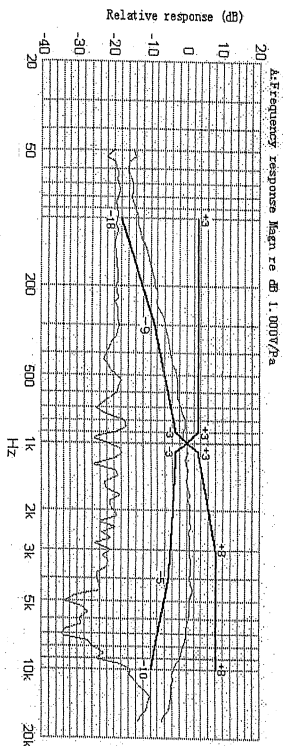

Dimension: Unmarked tolerance is ± 0.1 (mm)

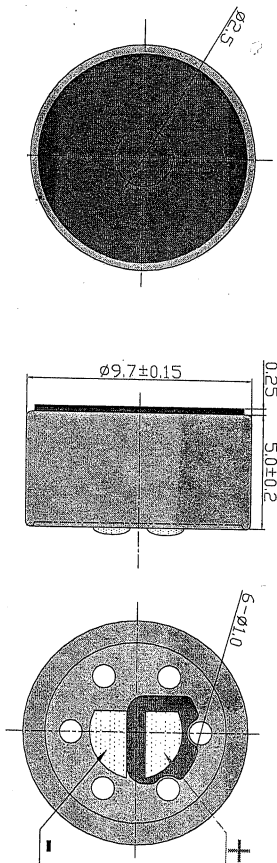

Schematic diagram:

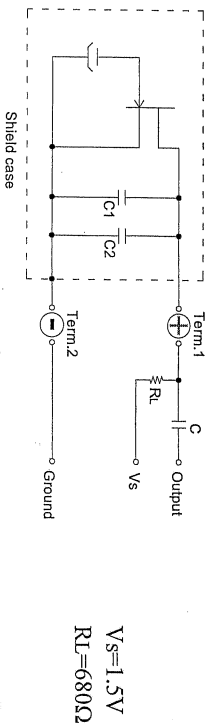

TYPE	MEU-95PD-01-713-C1033
FREQUENCY RESPONSE (Hz)	100 ~ 16,000 Hz.
DIRECTIVITY	Unidirectional
SENSITIVITY ($0dB=1V/u$ bar)	-71 (-713)
TOLERANCE	$\pm 3dB$
SENSITIVITY REDUCTION	Within -3dB@1V
S/N RATIO	More than 38 dB
OUTPUT IMPEDANCE	Low
MAX. OPER. VOLTAGE (VDC)	10 V
OPERATING VOLTAGE (VDC)	1.0V
CURRENT CONSUMPTION (mA)	Max 0.5
DIMENSIONS (mm)	9.7 x 5.0
TERMINATION	PD=Pad

INTERVOX
International

INTERNATIONAL COMPONENTS CORPORATION

215 McCormick Dr., Bohemia, NY 11716 (631) 952-9595 (631) 952-9567

Title:

Electret Condenser Microphone

Intervox Model #

MEU-95PD-01-713-C1033

Rev.

Scale:

Date:

Sheet 1 of 1