
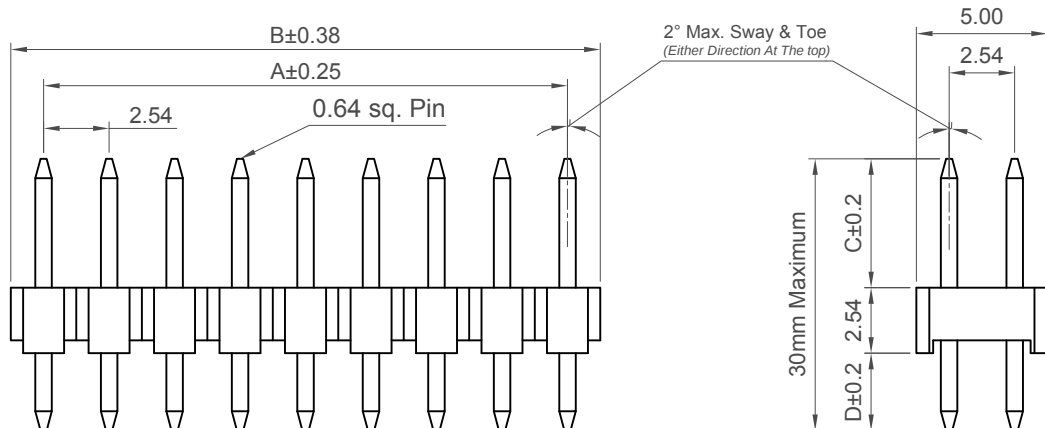

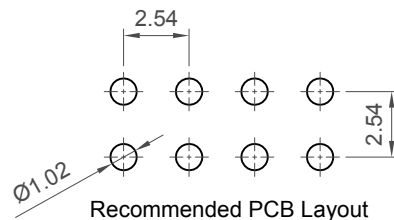


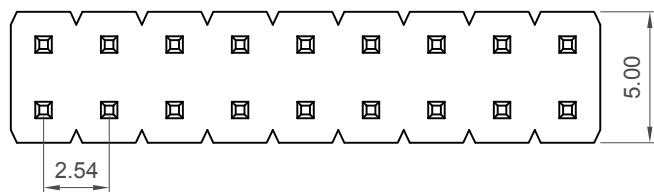

Ordering Grid

BG040-XX-X-XXXX-XXXX-X-X [Request Samples and Quotation](#)

No. of Contacts
04 to 80

Contact Plating

A = Gold Flash All Over (Standard)
B = Selective Gold Flash Contact Area /Tin On Tail
C = Tin All Over
G = 10µ" Gold Contact Area/Tin On Tail
I = 30µ" Gold Contact Area/Tin On Tail

Dimension C (1/100mm) (Post Height)

0300 = 3.00mm (Standard)

0450 = 4.50mm (Standard)

0650 = 6.50mm (Standard)

Or specify custom Post Height

eg 0250 = 2.50mm

(Maximum 2000=20.00mm)

(Minimum 0050=0.50mm)

Packing Options

G = Plastic Box (Standard)

D = Tube

E = Tube with Cap

Insulator Material

N = Nylon 6T (Standard)

P = PBT

L = LCP

Dimension D (1/100mm) (Tail Length)

0300 = 3.00mm (Standard)

Or specify custom Tail Length

eg 0250 = 2.50mm

(Maximum 2000=20.00mm)

(Minimum 0050=0.50mm)

Specifications

Material

Insulator:

Standard: Polyamide, Nylon 6T, UL94V-0

Options: Polymer, LCP, UL94V-0

Polyester, PBT, UL94V-0

Contact: Copper Alloy

Plating

Contact: See ordering grid

Electrical

Current Rating: 3 Amp Per Pin

Contact Resistance: 20 mΩ max.

Insulation Resistance : 1000 MΩ min.

Dielectric Withstand Voltage: 600 V AC

Mechanical & Environmental

Operating Temperature: -40°C to +105°C

Soldering Process

Nylon 6T (Standard)

IR Reflow: 260°C for 10 sec.

Wave: 230°C for 5-10 sec

Manual Solder : 350°C for 3-5 sec

LCP (Option)

IR Reflow: 260°C for 10 sec.

Wave: 250°C for 5-10 sec.

Manual Solder: 350°C for 3-5sec

PBT (Option)

Manual Solder: 330°C for 3-5sec

(not suitable for hi-temp process)

Mates with (Subject to Pin Length)

BG120 BG121 BG140 BG150 BG151 BG152 BG160

BG165 BG166 BG170 BG175 BG180 BG185 BG190

BG195 BG200 BG210 BG220 BG225

BG121 Recommended mating length 3.00mm

BG166 Recommended mating length 3.00mm

Number of Contacts	Dimensions	
	A	B
4	2.54	5.08
6	5.08	7.62
8	7.62	10.16
10	10.16	12.70
12	12.70	15.24
14	15.24	17.78
16	17.78	20.32
18	20.32	22.86
20	22.86	25.40
22	25.40	27.94
24	27.94	30.48
26	30.48	33.02
28	33.02	35.56
30	35.56	38.10
32	38.10	40.64
34	40.64	43.18
36	43.18	45.72
38	45.72	48.26
40	48.26	50.80
42	50.80	53.34
44	53.34	55.88
46	55.88	58.42
48	58.42	60.96
50	60.96	63.50
52	63.50	66.04
54	66.04	68.58
56	68.58	71.12
58	71.12	73.66
60	73.66	76.20
62	76.20	78.74
64	78.74	81.28
66	81.28	83.82
68	83.82	86.36
70	86.36	88.90
72	88.90	91.44
74	91.44	93.98
76	93.98	96.52
78	96.52	99.06
80	99.06	101.60

Part Number		Product Description	
BG040		2.54mm Pitch Pin Header	
Drawing Date		Dual Row, Through Hole, Vertical	
30th October 2006			
By	CC	Tolerances (Except as Noted)	Units:
Detail	BG040 F PCN	Length X ± 0.30 X.X ± 0.20 X.XX ± 0.15 X.XXX ± 0.10	Metric (mm)
Revision	F3	Angle X° ± 5° X.X° ± 2° X.XX° ± 1° X.XXX° ± 0.5°	3rd Angle Projection
Date	06/09/17		
		RoHS COMPLIANT 2011/65/EU	
		This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE	

GCT
www.gct.co

Not to Scale
Drawn By LYH
Sheet No. 1/1