
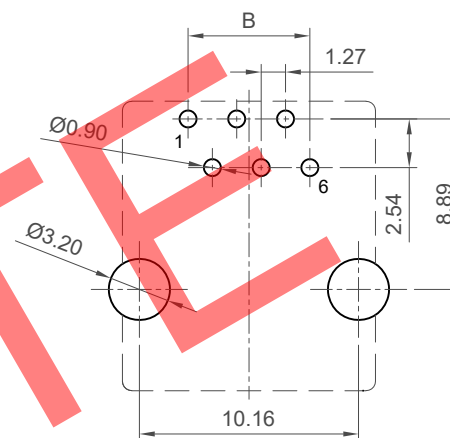
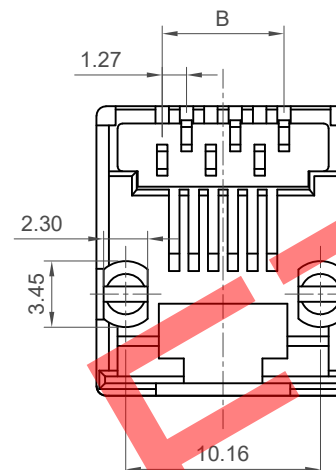
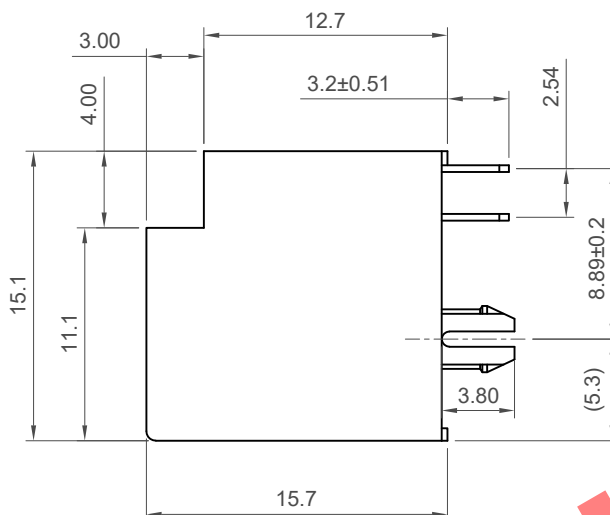


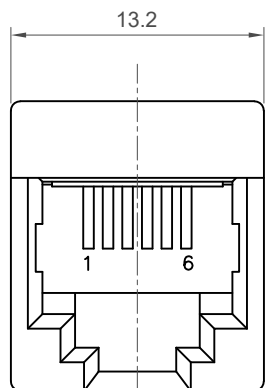

Recommended PCB Layout
As viewed from component side

□ Component Outline

Specification :

Material:

Housing: High Temp Nylon UL94V-0 or
Glass Filled Polyester,Black
Contact: Phosphor Bronze 0.35mm Thickness

Plating: Gold Plating over Nickel

Electrical:


Voltage Rating: 125 V AC (RMS)
Current Rating: 1.5 Amp
Contact Resistance: 35mΩ Max.
Insulation Resistance: 1000MΩ Min. @ 500 VDC
Dielectric Strength: 1000 VAC RMS 60Hz, 1 Min.

Mechanical & Environmental :


Operating Life : 750 Cycles Min.
PCB Retention Force After Solder: 10 LBS Min.
Storage Temperature : -40°C to +85°C
Operation Temperature: -40°C to +85°C

Dimension Table		
No. Of Positions	Positions Loaded	Dim. B
6	2	1.27
6	4	3.81
6	6	6.35

6 Positions Loaded Layout



For 4 Positions Loaded Remove Pins 1&6
For 2 Positions Loaded Remove Pins 1,2,5&6



Ordering Grid

MJ3105 - 6X - X - X Request Samples and Quotation

No. of Positions/ Positions Loaded

2 = 6/2
4 = 6/4
6 = 6/6

Contact Plating

2 = 6μ" Gold (Standard)
4 = 30μ" Gold

Insulator Material

N = High Temp Nylon (Standard)
P = Glass Filled Polyester

Part Number		Product Description	
MJ3105 6 Position		Modular Jack Connector	
Drawing Date		6 Position, Category 3, Vertical, Through Hole	
21st April 2010			
By	CC	Tolerances (Except as Noted)	Units:
Detail	Obsolete	Length	Metric (mm)
Revision	X	Angle	± 5°
Date	25/07/22	X.X ± 0.20 X.XX ± 0.15 X.XXX ± 0.10	3rd Angle Projection



This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE

GCT
www.gct.co


Not to Scale
Drawn By PKN
Sheet No. 1/2

H
G
F
E
D
C
B
A

1. Packing Material - Tray 1 PC

Quantity - 1*120=120 PCS


Tray: Body and Cover - 1PC Each
Label - 1 PC

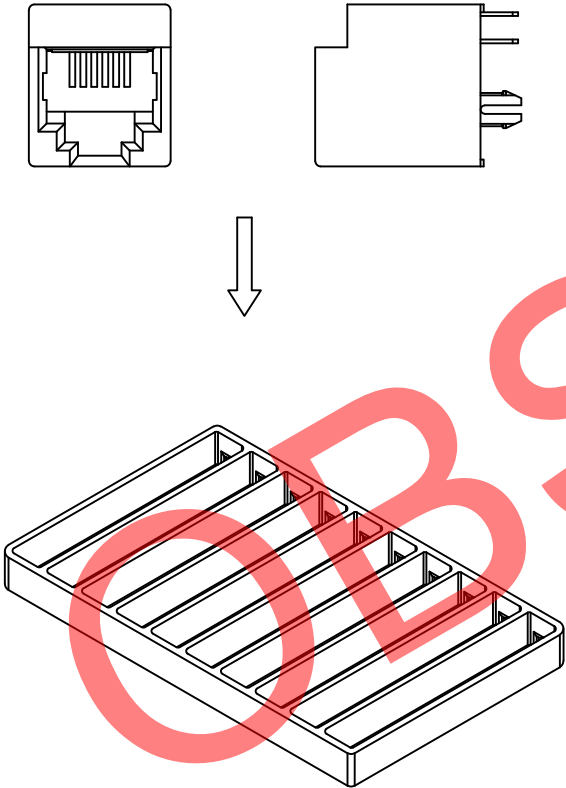

2. Packing Material - Carton - 380*315*290 - 1 PC

Quantity - 120*34=4080 PCS

Part Number	Net Weight	Gross Weight	Q'TY
MJ3105-62-X-X	10.6Kg	12.9Kg	4080
MJ3105-64-X-X	11.5Kg	13.5Kg	4080
MJ3105-66-X-X	12.0Kg	14.0Kg	4080

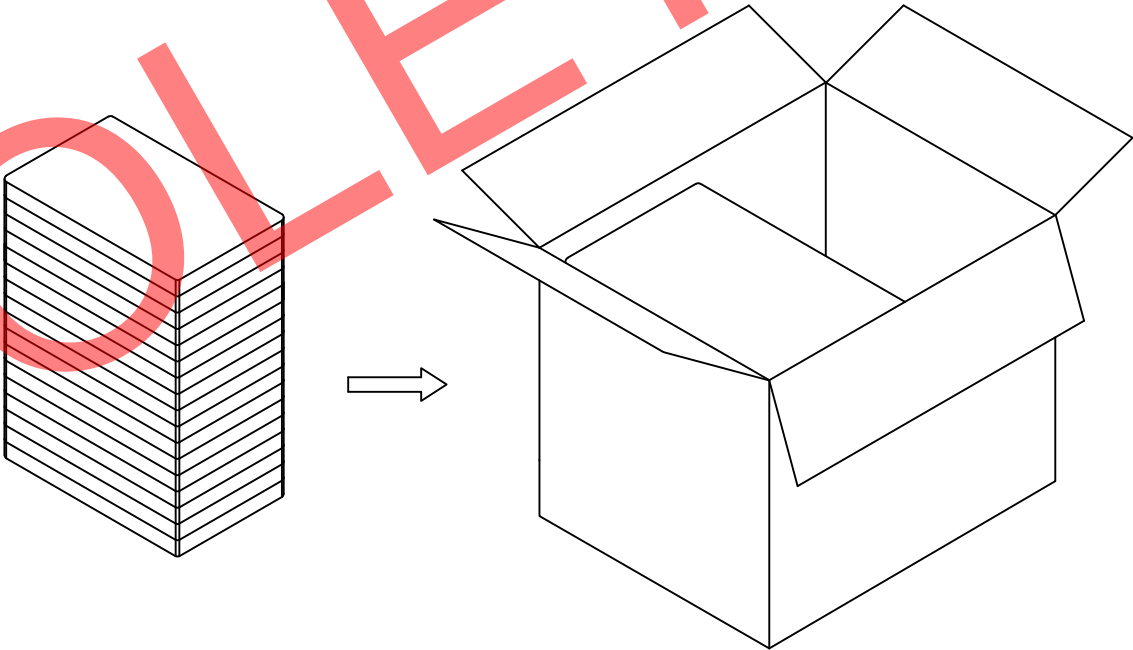

Part Number		Product Description			
MJ3105 6 Position		Modular Jack Connector			
Drawing Date		6 Position, Category 3, Vertical, Through Hole			
21st April 2010					
By	CC	Tolerances (Except as Noted)		Units:	 This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE
Detail	Obsolete	Length	Angle	Metric (mm)	
Revision	X	X.X ± 0.20	± 5°		
Date	25/07/22	X.XX ± 0.15		3rd Angle Projection	
		X.XXX ± 0.10			
					 www.gct.co
Not to Scale		Drawn By	PKN	Sheet No.	2/2