


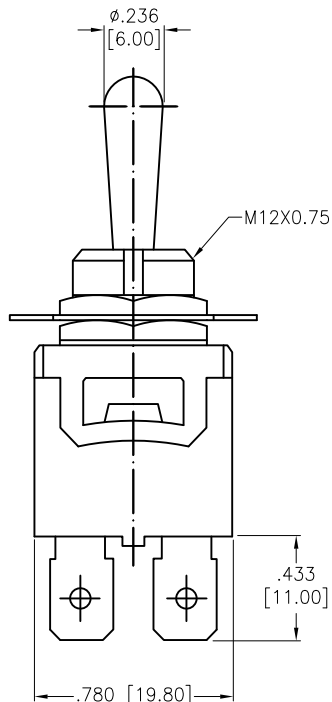


APPROVED: _____
DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/10/21	

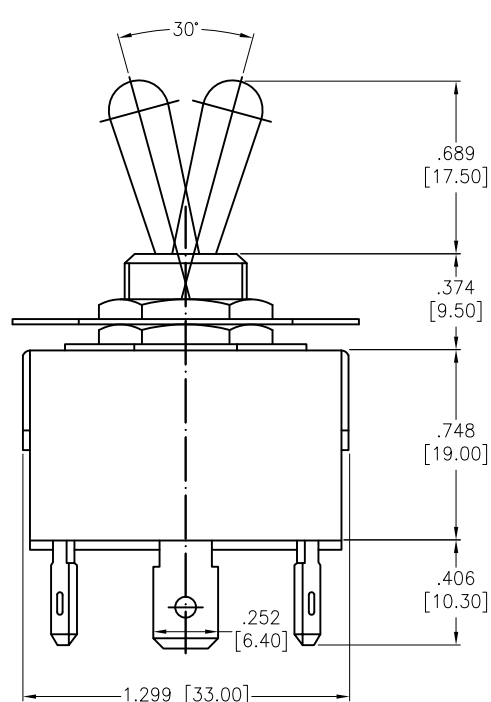


RECOMMENDED
PANEL CUT-OUT



CIRCUIT DIAGRAM
(DPDT)



2 WAY



3 WAY

SW-T1-4X-E-K2A

- B=ON-ON
- D=ON-(ON)
- E=ON-OFF-ON
- F=ON-OFF-(ON)
- G=(ON)-OFF-(ON)

SPECIFICATIONS:

Material:

Body: Bakelite, Color: Black

Lever: Brass, Nickel plated

Terminal: Brass, Silver plated

Electrical:

Rating: 10A @ 250V AC

15A @ 125V AC

Contact resistance: 50 mΩ max

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage: 1500V AC for 1 minute

Electrical Life: 10,000 cycles

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

DRAWN	WX	8/10/21
CHECKED	RC	8/10/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

**ADAM
TECH**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE SWITCH, TOGGLE MEDIUM, DPDT,
PC TERMINALS .250 [6.35mm]

SIZE X	PART NO. SW-T1-4X-B-K2A	REV. -
REF: S00204C	SCALE: NTS	SHEET 1 OF 1