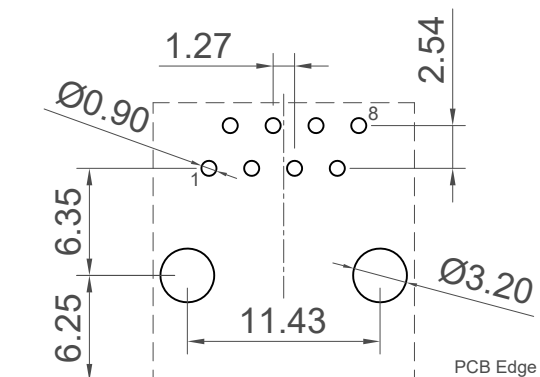


Specifications 规格

Material 物料

Housing 塑胶外壳: High Temp Nylon UL94V-0 or
Glass Filled Polyester UL94V-0, Black
Contact 端子材料: Phosphor Bronze $\phi 0.45\text{mm}$

Plating 电镀

Contact Area: Gold Plating over Nickel
Tails: Gold Plating over Nickel

Electrical 电气

Voltage Rating 电压额定值: 150 V AC

Current Rating 电流额定值: 1.5 Amp

Contact Resistance 接触电阻值: 30mΩ max.

Insulation Resistance 绝缘电阻值: 500MΩ min.

Dielectric Strength 电介质强度: 1000 VAC, 1 min.

Mechanical & Environmental 机械 & 环境

Storage Temperature 储存温度: -10°C to +70°C

Operation Temperature 使用温度: -40°C to +85°C

Operating Life 使用寿命: 1000 Cycles min.

Ordering Grid

MJ3110-

No. of Positions/
Positions Loaded
88=8/8

Request Samples and Quotation

Insulator Material

N = High Temp Nylon (Standard)
P = Glass Filled Polyester

Panel Stop

0 = Without (Standard)



1 = With

Plating

2 = 6μ" Gold (Standard)

4 = 30μ" Gold

5 = 50μ" Gold

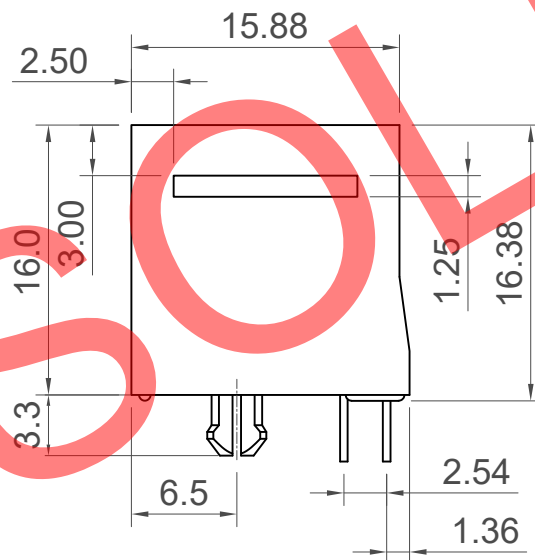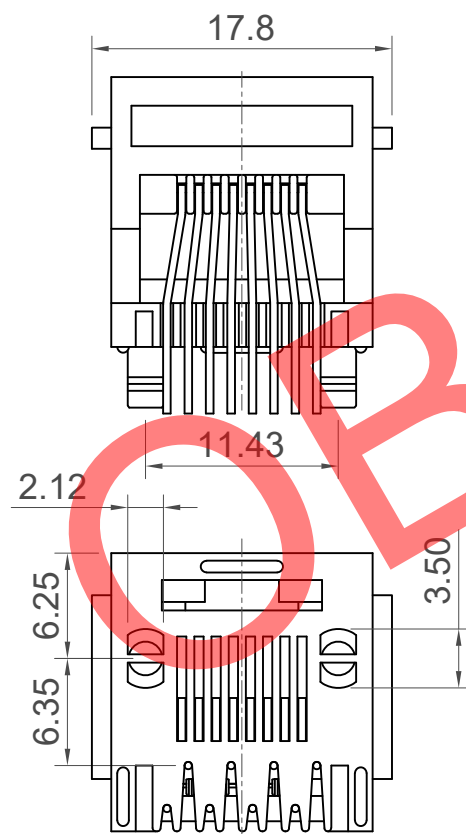

Part Number			Product Description		
MJ3110-88			Modular Jack Connector 8 Position, Category 3, Vertical Through Hole		
Drawing Date					
13th May 2010					
By	CC	Tolerances (Except as Noted) Length		Units: Metric (mm)	  This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE
Detail	Obsolete	X.X ± 0.25	Angle		
Revision	X	X.XX ± 0.15			
Date	09/08/22	X.XXX ± 0.075		 3rd Angle Projection	



This drawing is confidential and
copyright of Global Connector
Technology, Ltd (GCT).
This drawing must not be copie
or disclosed without written
consent. E & OE

Not to Scale	Drawn By PKN	Sheet No. 1/2
-----------------	-----------------	------------------

1. Packing Material 包材 - PVC Tray 1 PC

Quantity 數量 -


With Panel Stop 窗口带有线缆挡板: 1*90=90 PCS

Without Panel Stop 窗口没有线缆挡板: 1*100=100 PCS

Tray: Body and Cover 真空盒上下蓋各 - 1PCS Each

Tracing Label 流程單編號標籤 - 1 PCS

Lead Free Label 無鉛製程標籤 - 1PCS

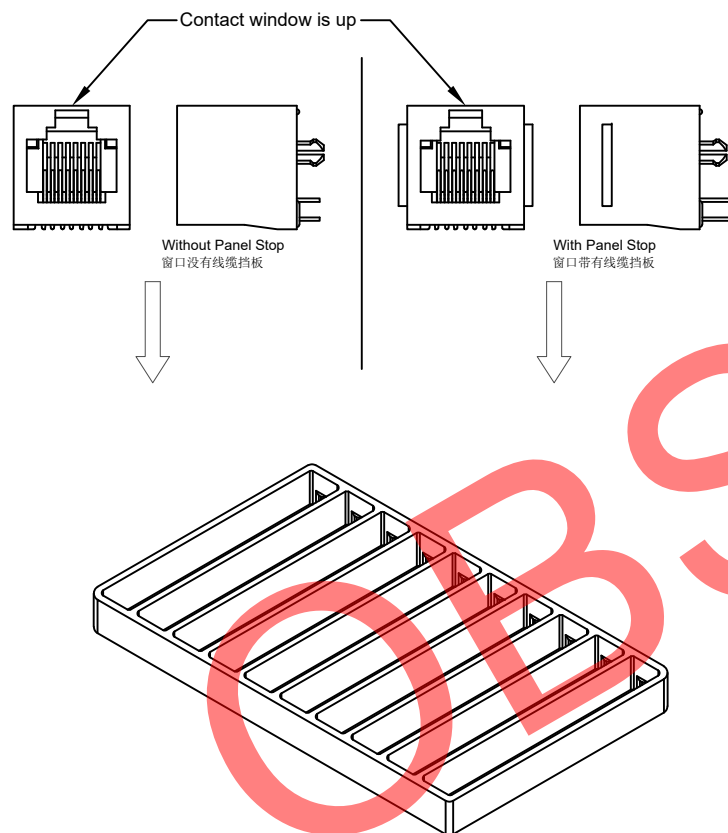


2. Packing Material 包材 - Carton 1 PC

Quantity 數量 -

With Panel Stop 窗口带有线缆挡板: 90*42=3780 PCS

Without Panel Stop 窗口没有线缆挡板: 100*42=4200 PCS

Part Number 零部件料号	Panel Stop 线缆挡板	Net Weight 淨重	Gross Weight 毛重	Q'TY 數量
MJ3110-88-1-X-X	With	13.1Kg	17.1±0.3Kg	3780
MJ3110-88-0-X-X	Without	12.4Kg	16.4±0.3Kg	4200

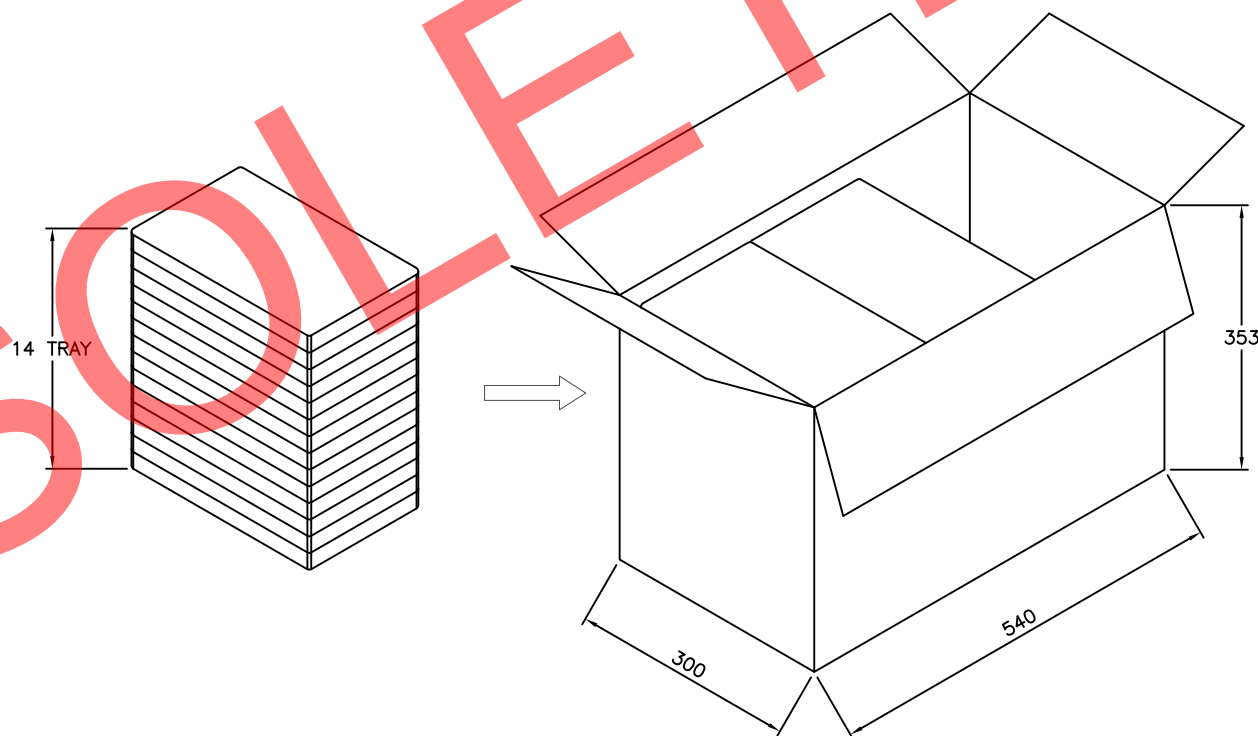

Part Number MJ3110-88		Product Description Modular Jack Connector 8 Position, Category 3, Vertical Through Hole			 This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE	 www.gct.co
Drawing Date 13th May 2010	By CC	Tolerances (Except as Noted) Length Angle		Units: Metric (mm)		
Revision Date	Obsolete X 09/08/22					
				Not to Scale	Drawn By PKN	Sheet No. 2/2