
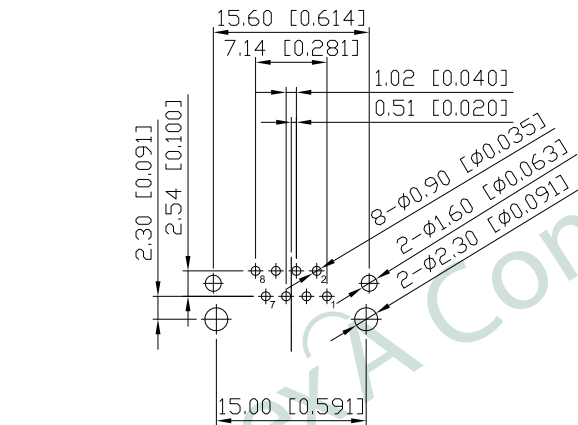
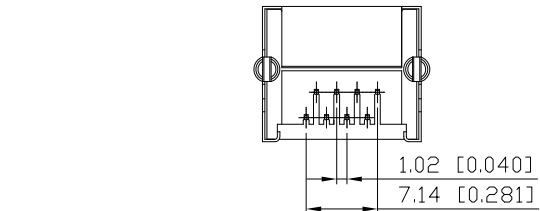




1. MECHANICAL DIMENSIONS :

REV.	DATE	DESCRIPTION
01	Jan. 09, '18	1st RELEASE


- NOTES:
1. MATERIAL:
HOUSING: HIGH THERMOPLASTIC, UL94V-0, BLACK
CONTACTS: PHOS-BRONZE,
GOLD FLASH PLATING ON CONTACT AREA,
NICKEL UNDERPLATING OVERALL
SHIELD: COPPER ALLOY, NICKEL PLATING
 2. OPERATING TEMPERATURE: -40°C~+85°C
 3. INSERTION FORCE: 4 POUNDS MAX.
EXTRACTION FORCE: 4 POUNDS MAX.
 4. DURABILITY: 750 MATING CYCLED MIN.
 5. CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68, SUBPART F.
 6. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

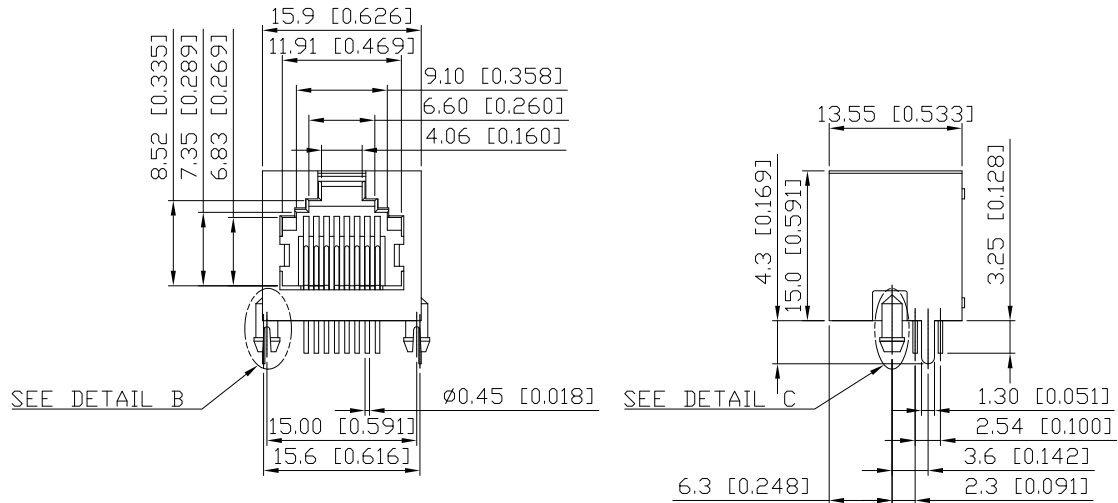


SUGGESTED PCB LAYOUT
(TOP VIEW)
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

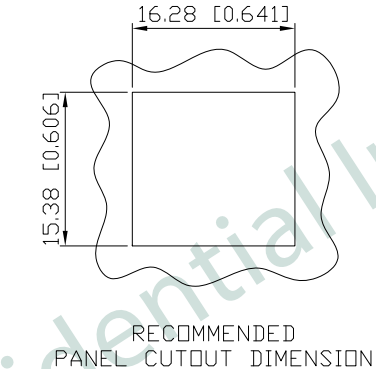

DETAIL B
SCALE 2:1

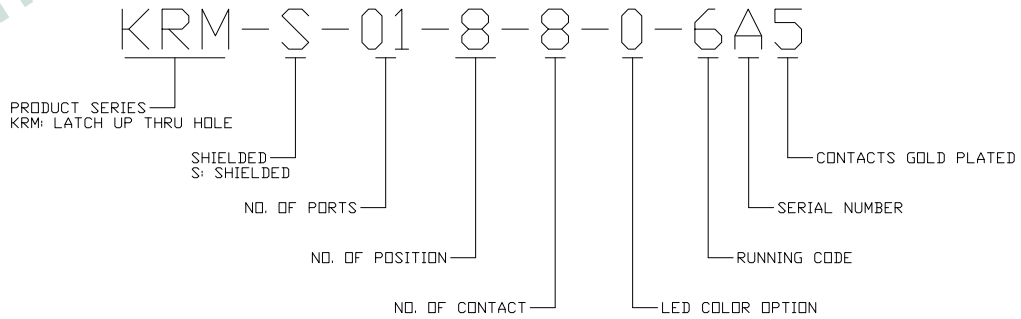


DETAIL C
SCALE 2:1

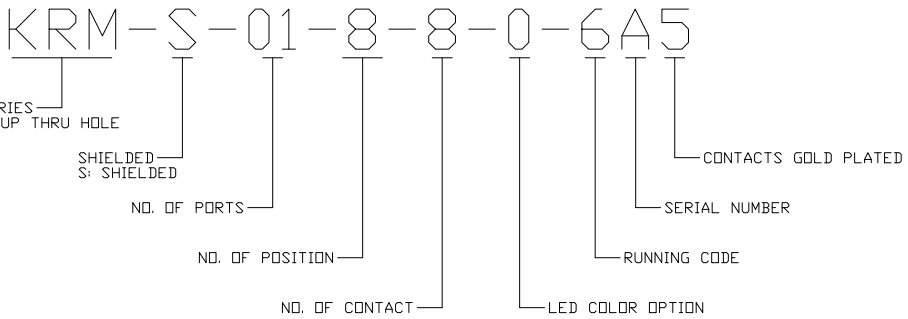

PART NO KRM-S-01-8-8-0-6A5				
TITLE	RJ45 8P8C, W/O LED, SHIELDED			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	DANIEL	Jan. 09, '18	1 of 3


2. PACKING SPECIFICATION:

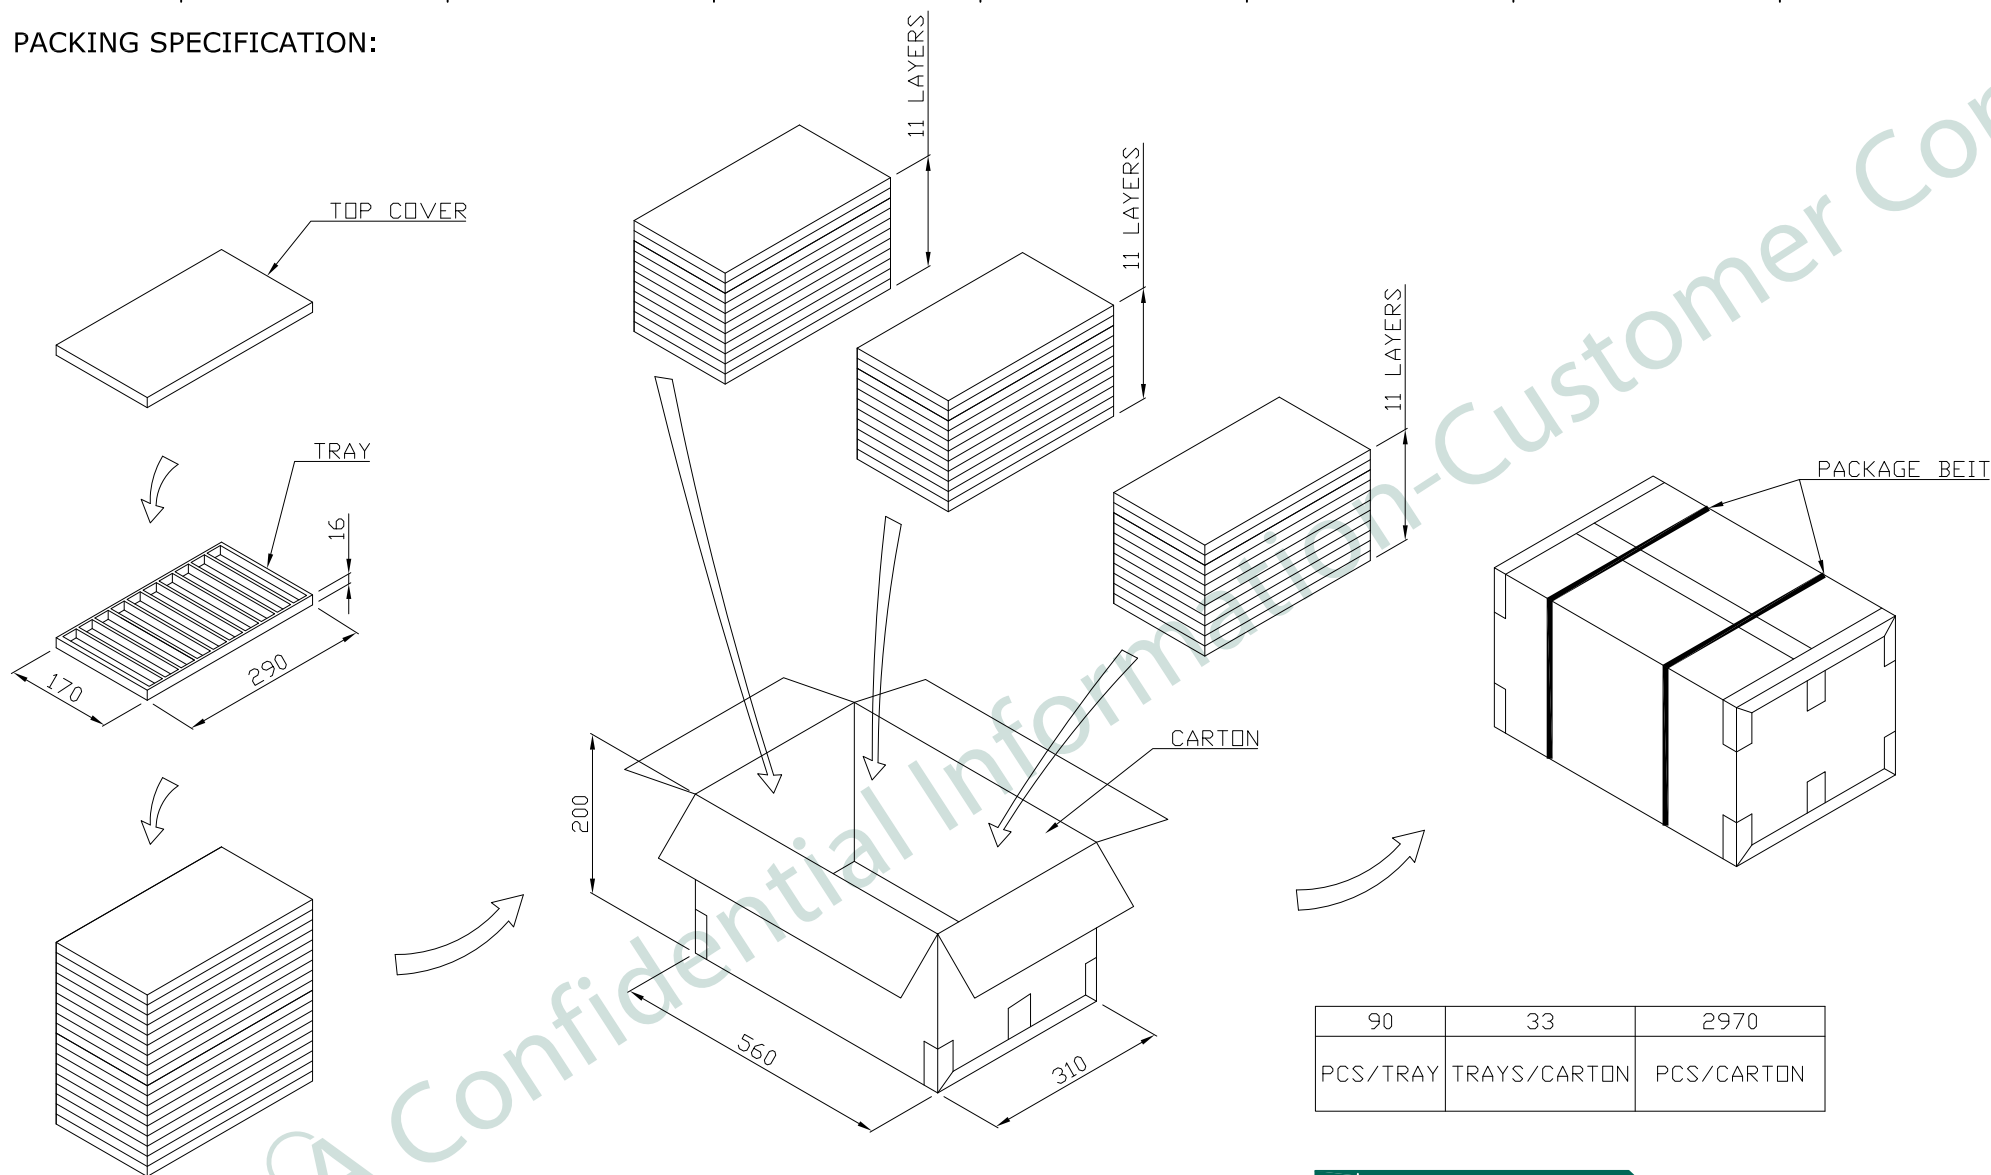

90	33	2970
PCS/TRAY	TRAYS/CARTON	PCS/CARTON

PART NO KRM-S-01-8-8-0-6A5				
TITLE		RJ45 8P8C, W/O LED, SHIELDED		
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	DANIEL	Jan. 09, '18	2 of 3

3. PROFILE OF WAVE SOLDER :

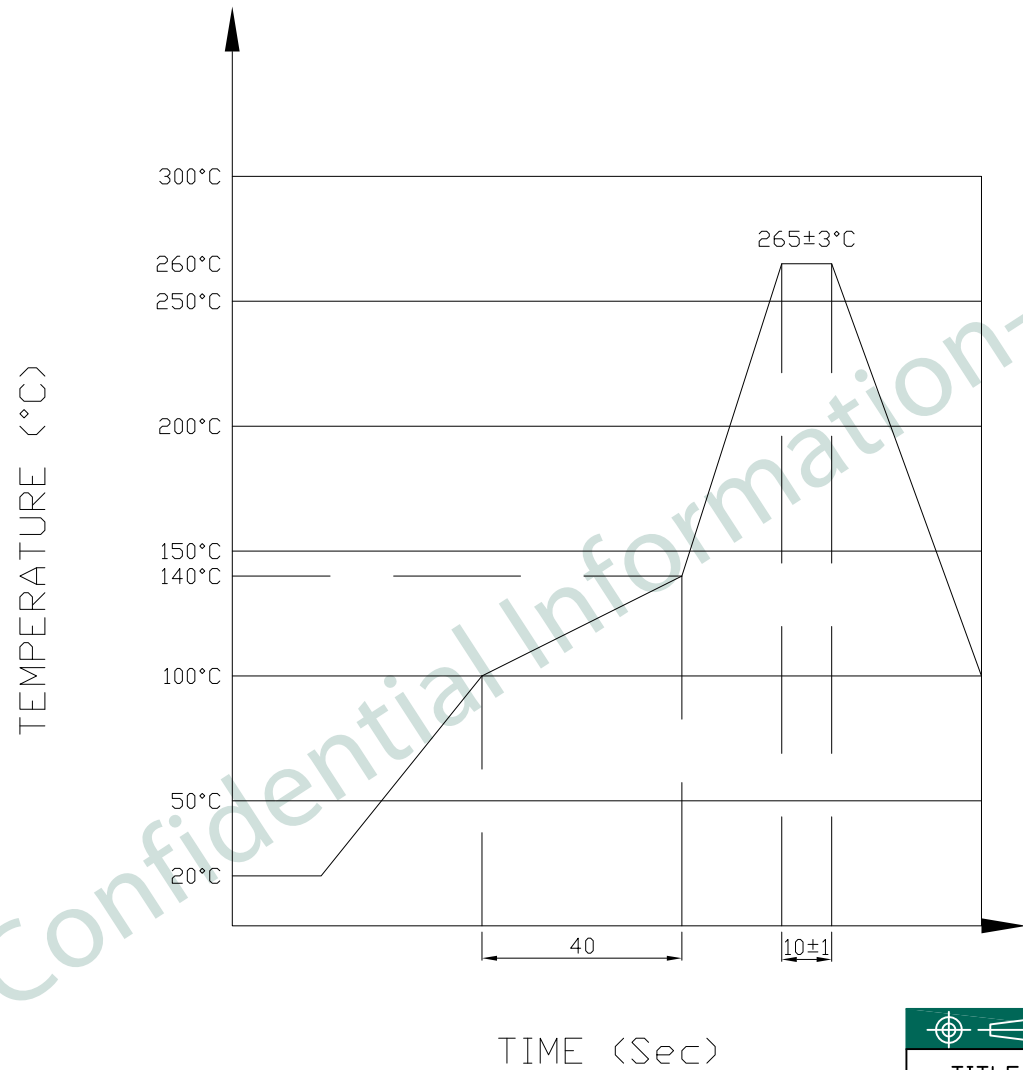

The measuring point for the specified temperature shall be on the soldered part of the lead

PART NO KRM-S-01-8-8-0-6A5				
TITLE	RJ45 8P8C, W/O LED, SHIELDED			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	DANIEL	Jan. 09, '18	3 of 3