



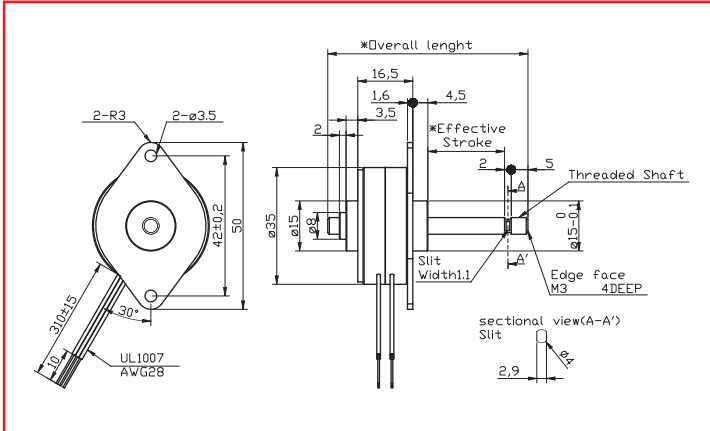


		PFL35T-48											
Type Of Winding		Unipolar						Bipolar					
Steps Per Revolution		48											
Thread Pitch	mm	0.48	0.96	1.2	0.48	0.96	1.2	0.48	0.96	1.2	0.48	0.96	1.2
Travel/Step	mm	0.01	0.02	0.025	0.01	0.02	0.025	0.01	0.02	0.025	0.01	0.02	0.025
Stroke	mm	30 or 60											
Force @ 200pps	N	35	32	30	35	32	30	39.5	38	35	39.5	38	35
Rated Voltage	V	12			5			12			5		
Rated Current	A/Ø	0.17			0.33			0.17			0.34		
Resistance	Ω	70			12			72			16		
Inductance	mH/Ø	27			5			54			6.4		
Operating Temp. Range	°C	-10 to +50											
Temperature Rise	°K	70											
Weight	g	95											

PFL35T-48C4 w/ Unipolar Constant Voltage

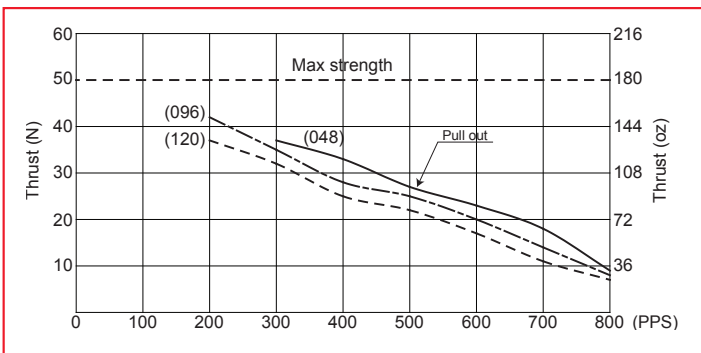

Driver: PS-2LD-5
Power: 12Vdc
Excitation: Full-step

PFL35T-48R4 w/ Bipolar Constant Voltage

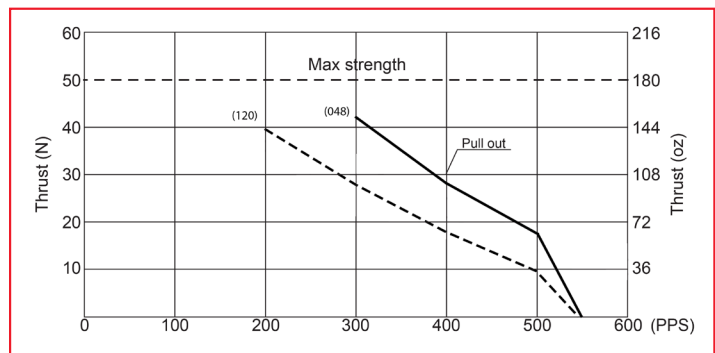

Driver: BCD404B1
Power: 12Vdc
Excitation: Full-step

All characteristics are for reference only.