
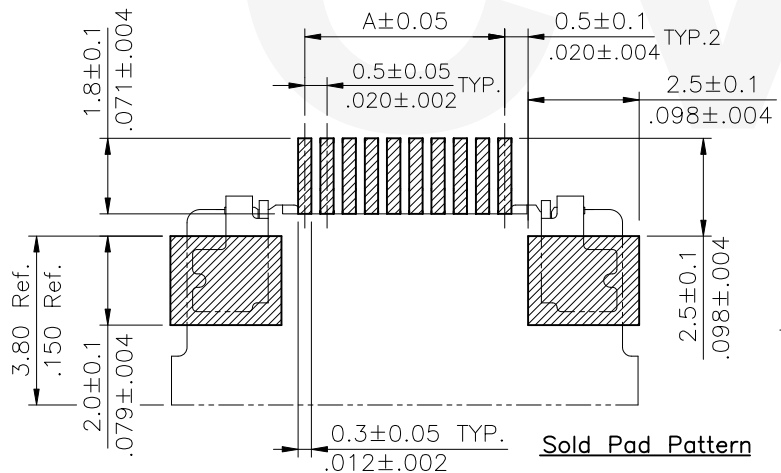
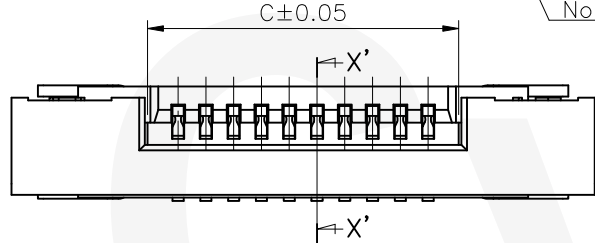


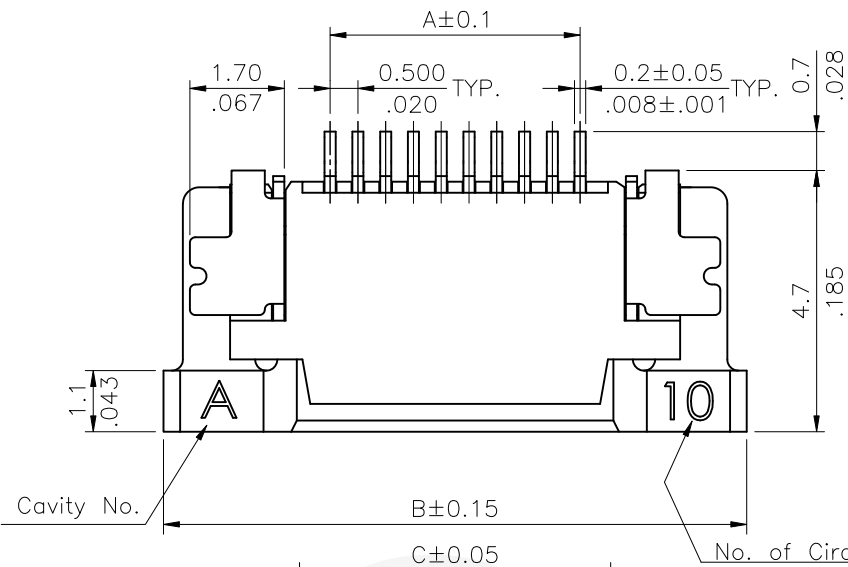

Ordering Code

CF20 ** 2 U 0 *0 -NH
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② No. of Circuits

③ Plating code:

2= Gold flash plated over
1.27 μ m(50 μ) Nickel

④ Contact style: U= Upside contact

⑤ Color: 0= Nature

⑥ Other option: R0= Tape & Reel
T0= Tube Packing

⑦ Other option:
NH= For Lead Free IR Processes
and Halogen-Free

Material :

* Body : High temperature plastic UL 94V-0


Color Nature

* Slider : High temperature plastic UL 94V-0

Color Black

* Contact : Copper alloy with Matte Tin plated

* Fixed tab : Copper alloy with Matte Tin plated

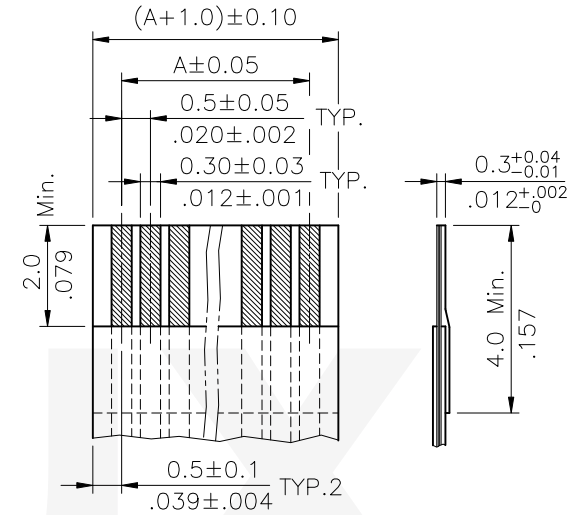



Accommodated FFC/FPC

A = 0.50 * No. of Spaces

B = A + 6.0

C = A + 1.1

* Available in 4 through 55 circuits

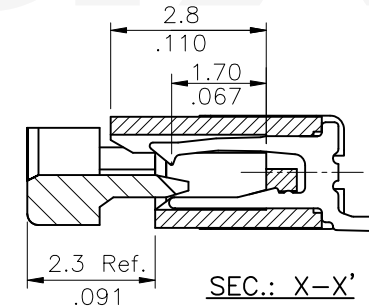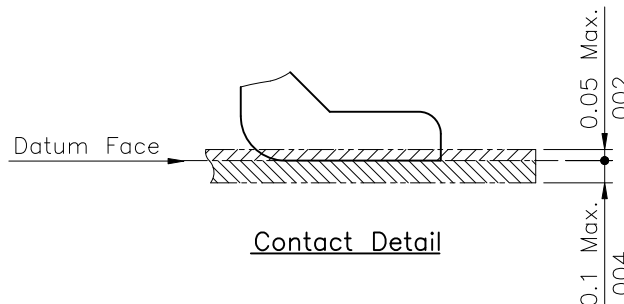

Halogen-Free


Lead Free Process

RoHS Compliant




4					DATE	UNIT: mm / inch	TITLE: 0.50mm(.031") ZIF FFC/FPC UPSIDE CONTACT SURFACE MOUNT CONNECTOR	 瀚荃股份有限公司 CviLux Corporation		
3					7/04-19'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:			
2	Yushu	7/04-19'	ECRB119036/ECNT119159	2019.07.18 ISSUED	ENGINEER: Yushu	7/11-19'	.X ± 0.15/.006 X' ± .1	FINISH:	DRAWING NO. CF2097SC	PART NO. CF20**2U0*0-NH
1	Karen	7/14-12'	ECR11040-1/ECN11179/ECN11192/ECN12157-0		CHECKED BY: Eisley	7/12-19'	.XX ± 0.10/.004 X' ± .1		SCALE 7 / 1	SHEET 1 OF 2
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	7/12-19'	.XXX ± 0.05/.002 XX' ± .1			

NOTE :

- * Reel Material : Corrugated Paper
- * Carrier Material : Clear, Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 100mm
- * All dimensions meet EIA-481-2 & EIA-481-3 requirements.
- * Quantity : 2000 PCS/Reel

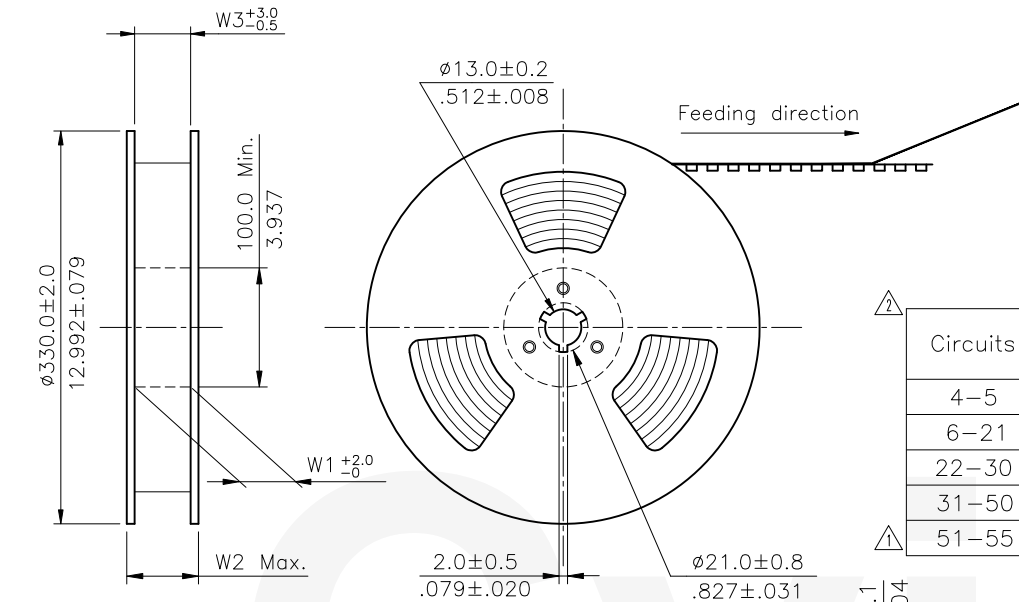

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
4-5	16.0(.630)	—	16.5(.650)	22.5(.885)	16.5(.650)	11
6-21	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9
22-30	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
31-50	44.0(1.732)	40.40(1.596)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
51-55	56.0(2.205)	52.40(2.063)	56.5(2.224)	62.5(2.461)	56.5(2.224)	4

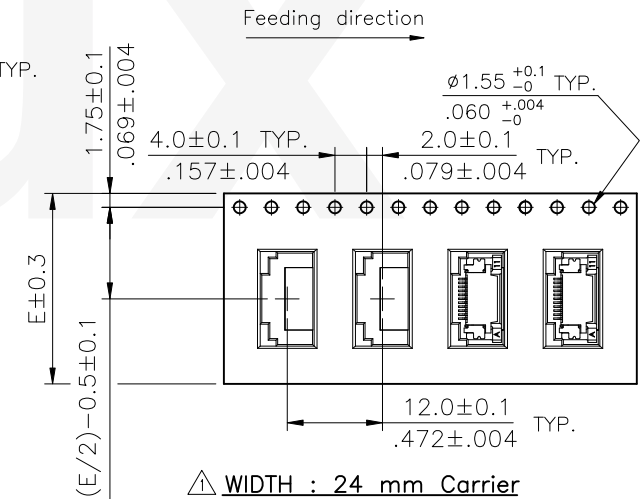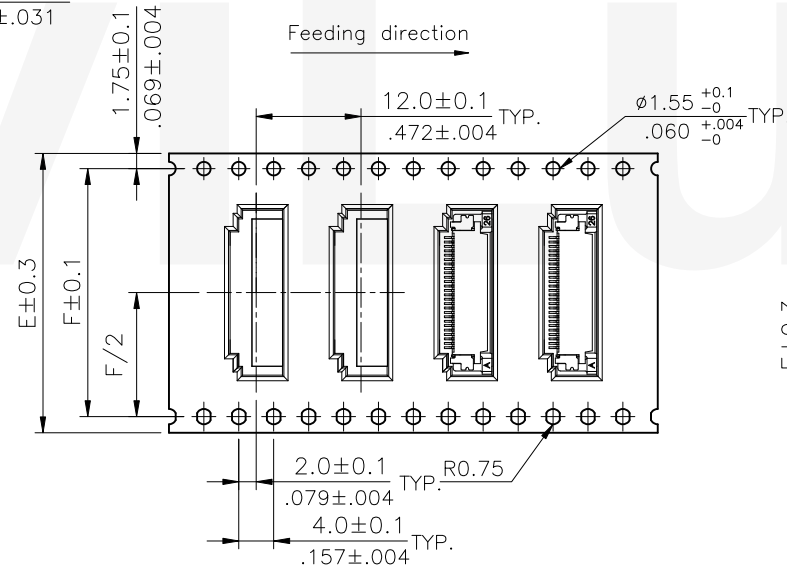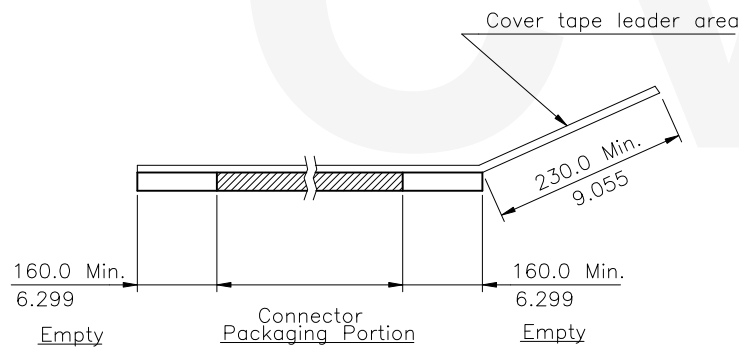

WIDTH : 32,44,56 mm Carrier

WIDTH : 24 mm Carrier

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 0.50mm(.031") ZIF FFC/FPC UPSIDE CONTACT SURFACE MOUNT CONNECTOR	 瀚荃股份有限公司 CviLux Corporation		
3					DRAWN BY: Yushu					
2					ENGINEER: Sun		MATERIAL:			
1	Karen	7/14-12'	ECR11040-1/ECN11179/ECN11192/ECN12157-0	CHECKED BY: Eisley	7/12-19'	.X ±	.X' ±			
						.XX ±	.X' ±			
						.XXX ±	.XX' ±			
SYMBOL	NAME	DATE	REVISIONS	APPROVED BY: Eisley	7/12-19'		FINISH:	DRAWING NO. CF2097SC	PART NO. CF20**2U0*0-NH	
								SCALE	SHEET 2 OF 2	