


# AMAX-4817

# AMAX-4820

## 8-Channel, 16-Bit Isolated Analog Input EtherCAT Remote I/O Module

## 4-Channel, 16-Bit Isolated Analog Output EtherCAT Remote I/O Module

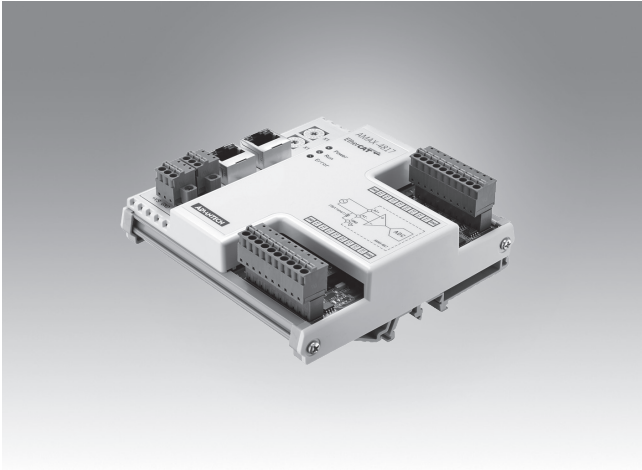

AMAX-4817



### Features

- Suitable for EtherCAT networks
- 8 x 16-bit analog input channels with 2,500 V<sub>DC</sub> isolation
- Wide common-mode voltage range ( $\pm 275$  V)
- Removable European-type connector
- Supports EtherCAT distributed clocks (DC) mode and SyncManager mode
- 2 x Rotating switches that support up to 256 slave IDs

### Introduction

AMAX-4817 is an industrial-grade remote I/O slave module equipped with the EtherCAT protocol. European-type pluggable terminal blocks facilitate module setup and maintenance, while the compact size and support for DIN-rail mounting ensure easy installation in cabinet configurations. For safe and reliable operation, all of the 8 analog input channels are protected by a 2,500 V<sub>DC</sub> isolation circuit.

### Specifications

#### Communication

- |                                   |   |
|-----------------------------------|---|
| ▪ <b>Interface</b>                | EtherCAT  |
| ▪ <b>Data Transfer Medium</b>     | Ethernet/EtherCAT cable (min. CAT 5), shielded        |
| ▪ <b>Distance Between Modules</b> | Max. 100 m (100BASE-TX)                               |
| ▪ <b>Communication Cycle Time</b> | 100 $\mu$ s (guarantees all channel data are updated) |
| ▪ <b>Data Transfer Rates</b>      | 100 Mbps  |

#### Analog Input

- |                                    |                             |
|------------------------------------|-----------------------------|
| ▪ <b>Channels</b>                  | 8                           |
| ▪ <b>Resolution</b>                | 16 bits                     |
| ▪ <b>Input Voltage Range</b>       | 0 ~ 10 V, $\pm 10$ V        |
| ▪ <b>Common-Mode Voltage Range</b> | $\pm 275$ V                 |
| ▪ <b>Measurement Error</b>         | $< \pm 0.1\%$               |
| ▪ <b>Isolation Protection</b>      | 2,500 V <sub>DC</sub>       |
| ▪ <b>Conversion Time</b>           | 40 $\mu$ s for all channels |


Note: Because the analog sampling rate exceeds the communication cycle time, the maximum polling rate will be limited by the communication cycle time = 10 kS/s for each channel.

#### General

- |                                |   |
|--------------------------------|---|
| ▪ <b>Connectors</b>            | 2 x 10-pin terminal block (I/O), 3.81 mm<br>1 x 3-pin screw terminal block (power), 3.81 mm<br>2 x RJ-45 (EtherCAT) |
| ▪ <b>Dimensions</b>            | 120 x 120 x 40 mm (4.72 x 4.72 x 1.57 in)   |
| ▪ <b>Operating Temperature</b> | -20 ~ 60 °C (-4 ~ 140 °F)   |
| ▪ <b>Storage Temperature</b>   | -40 ~ 70 °C (-40 ~ 158 °F)  |
| ▪ <b>Storage Humidity</b>      | 5 ~ 95% RH (non-condensing)   |
| ▪ <b>Power Supply</b>          | 10 ~ 30 V <sub>DC</sub>   |
| ▪ <b>Power Consumption</b>     | Typical 160 mA @24 V; Max. 190 mA @24 V   |

### Ordering Information

- |                          |   |
|--------------------------|---|
| ▪ <b>AMAX-4817-AE</b>    | 8-ch, 16-bit isolated AI EtherCAT remote I/O module |
| ▪ <b>96PSD-A40W24-MM</b> | DIN rail A/D 100 ~ 240 V, 40 W, 24 V                |

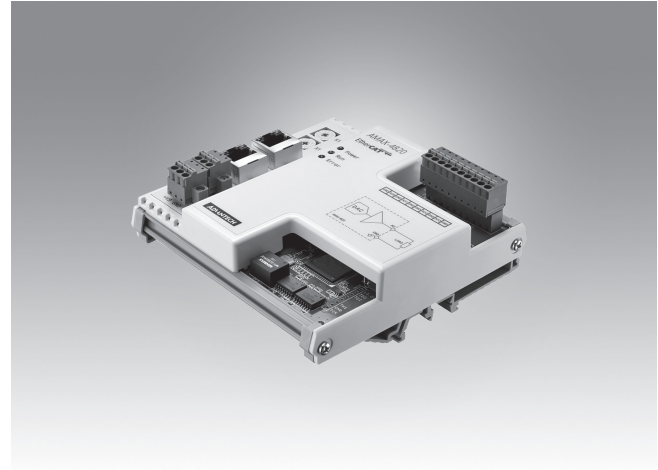

AMAX-4820



### Features

- Suitable for EtherCAT networks
- 4 x 16-bit analog output channels with 2,500 V<sub>DC</sub> isolation
- Multiple voltage and current output ranges
- Removable European-type connector
- Supports EtherCAT distributed clocks (DC) mode and SyncManager mode
- 2 x Rotating switches that support up to 256 slave IDs

### Introduction

AMAX-4820 is an industrial-grade remote I/O slave module equipped with the EtherCAT protocol. European-type pluggable terminal blocks facilitate module setup and maintenance, while the compact size and support for DIN-rail mounting ensure easy installation in cabinet configurations. For safe and reliable operation, all of the 4 analog output channels are protected by a 2,500 V<sub>DC</sub> isolation circuit.

### Specifications

#### Communication

- |                                   |   |
|-----------------------------------|---|
| ▪ <b>Interface</b>                | EtherCAT  |
| ▪ <b>Data Transfer Medium</b>     | Ethernet/EtherCAT cable (min. CAT 5), shielded        |
| ▪ <b>Distance Between Modules</b> | Max. 100 m (100BASE-TX)                               |
| ▪ <b>Communication Cycle Time</b> | 100 $\mu$ s (guarantees all channel data are updated) |
| ▪ <b>Data Transfer Rates</b>      | 100 Mbps  |

#### Analog Output

- |                               |  |
|-------------------------------|--|
| ▪ <b>Channels</b>             | 4  |
| ▪ <b>Resolution</b>           | 16 bits  |
| ▪ <b>Output Voltage Range</b> | 0 ~ 5 V, 0 ~ 10 V, $\pm 5$ V, $\pm 10$ V                           |
| ▪ <b>Output Current Range</b> | 0 ~ 20 mA, 4 ~ 20 mA   |
| ▪ <b>Load</b>                 | > 1 k $\Omega$ (voltage output)<br>< 625 $\Omega$ (current output) |
| ▪ <b>Output Error</b>         | $< \pm 0.1\%$  |
| ▪ <b>Isolation Protection</b> | 2,500 V <sub>DC</sub>  |
| ▪ <b>Conversion Time</b>      | 40 $\mu$ s for all channels  |

#### General

- |                                |   |
|--------------------------------|---|
| ▪ <b>Connectors</b>            | 1 x 10-pin terminal block (I/O), 3.81 mm<br>1 x 3-pin screw terminal block (power), 3.81 mm<br>2 x RJ-45 (EtherCAT) |
| ▪ <b>Dimensions</b>            | 120 x 120 x 40 mm (4.72 x 4.72 x 1.57 in)   |
| ▪ <b>Operating Temperature</b> | -20 ~ 60 °C (-4 ~ 140 °F)   |
| ▪ <b>Storage Temperature</b>   | -40 ~ 70 °C (-40 ~ 158 °F)  |
| ▪ <b>Storage Humidity</b>      | 5 ~ 95% RH (non-condensing)   |
| ▪ <b>Power Supply</b>          | 10 ~ 30 V <sub>DC</sub>   |
| ▪ <b>Power Consumption</b>     | Typical 160 mA @24 V; Max. 190 mA @24 V   |

### Ordering Information

- |                          |   |
|--------------------------|---|
| ▪ <b>AMAX-4820-AE</b>    | 4-ch, 16-bit isolated AO EtherCAT remote I/O module |
| ▪ <b>96PSD-A40W24-MM</b> | DIN rail A/D 100 ~ 240 V, 40 W, 24 V                |