

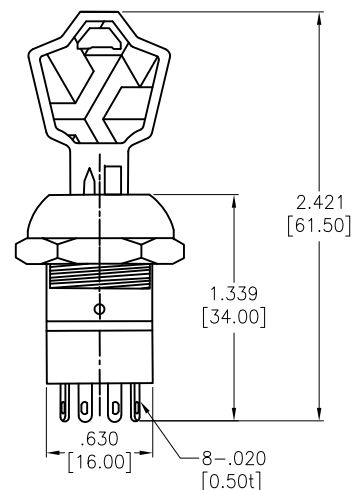


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/6/20	
A		UPDATE DRAWING.	5/11/21	JJ/RC
B		UPDATE SPEC.	5/18/21	JJ/RC

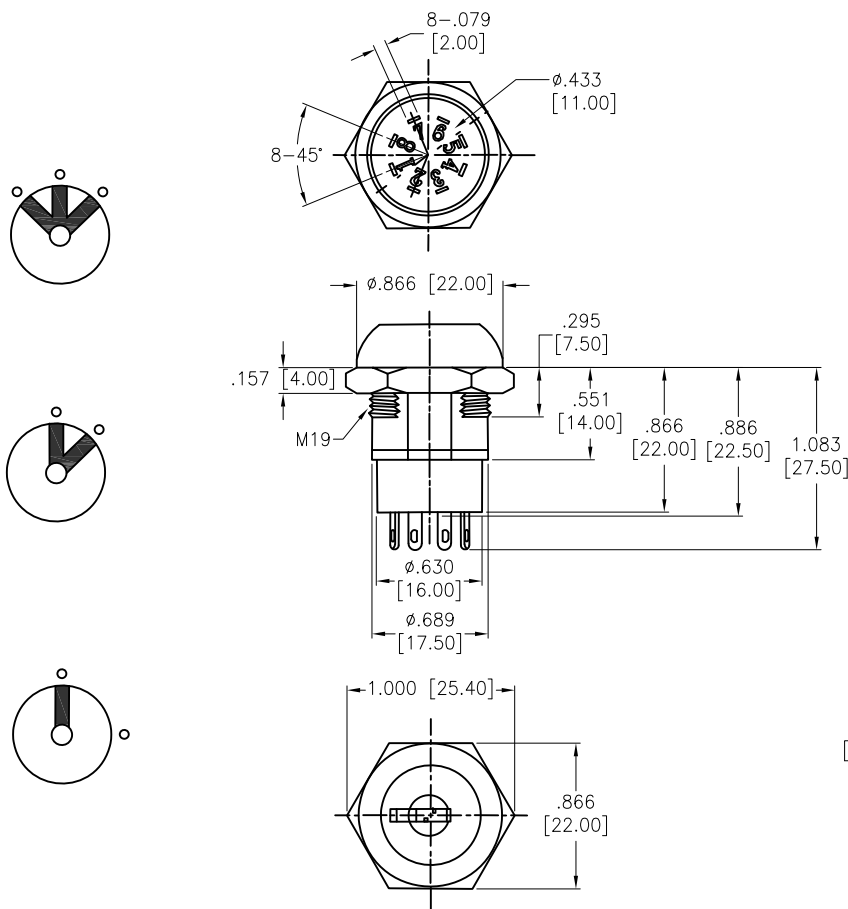

RECOMMENDED PANEL CUT SW-R-K13X-X

	FUNCTION
K13A	SP, ON-ON
K13B	DP, ON-ON

	Function
A	Key pulled on both positions. Note: this would be our standard
B	Key pulled on 1 position

SPECIFICATIONS:

Material:

Body: Steel, Polished Chrome

Electrical:

The rated load: 125 VAC, 4A

250 VAC, 2A

28 VDC, 4A

Contact resistance: 20 m Ω max

Insulation resistance: 100 m Ω min (500VDC)

Dielectric withstanding voltage: 1000 VAC for 1 minute

Mechanical life: $\geq$ 10000 Cycles

Temperature Rating:

-20°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X $\pm$.10	ϕ .X $\pm$.10
.XX $\pm$.020	ϕ .XX $\pm$.015
.XXX $\pm$.015	ϕ .XXX $\pm$.010

DRAWN	OW	11/6/20
CHECKED	AC	11/6/20
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
SWITCH, KEY LOCK, 19MM
PANEL MOUNT, SOLDER TERMINAL

SIZE X	PART NO. SW-R-K13X-X	REV. B
REF: S00204C	SCALE: NTS	SHEET 1 OF 1