


MATERIALS AND FINISHES

BODY, JAM NUT, LOCKWASHER STAINLESS STEEL
PLATED GOLD


CENTER CONTACT BERYLLIUM COPPER
PLATED GOLD

INSULATOR TEFLON

O RING SILICONE RUBBER

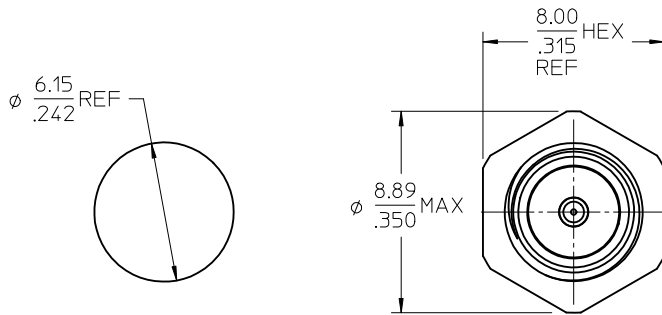

RECOMMENDED MOUNTING
HOLE PATTERN

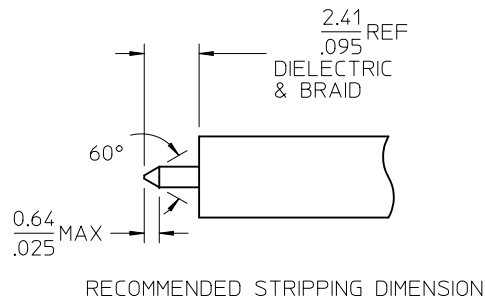

RECOMMENDED STRIPPING DIMENSION

PART # 73298-0000

MIL-STD-348A, FIG. 321.1

INTERFACE

SPECIFICATION

DESCRIPTION




CHG: NEW RELEASE
ADDED STRIPPING DIM
REMOVED
AS-89678-9370
EC NO: URF2009-0014
2008/07/14
DRWN:SSHAH
CHKD:ROBERTSON
2008/07/14
APPR:JWENER
2008/07/14
REV
A

QUALITY
SYMBOLS
=0
=0
DESCRIPTION


GENERAL TOLERANCES
(UNLESS SPECIFIED)
mm INCH
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± --- ± ---
1 PLACE ± --- ± ---
ANGULAR ± 2 °
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN
DRAWN BY DATE
TEF 2003/10/30
CHECKED BY DATE
SSS 2003/10/30
APPROVED BY DATE
GMH 2003/10/30
MATERIAL NO.
732980000
SIZE
C


SCALE
DESIGN UNITS
METRIC
THIRD ANGLE
PROJECTION
TITLE
BMA PLUG,BLKHD FOR SR141
AND RG402 CABLES,50 OHM
EWR-2214 BMA-PC
MOLEX INCORPORATED
DOCUMENT NO.
SD-73298-000
SHEET NO.
1 OF 1

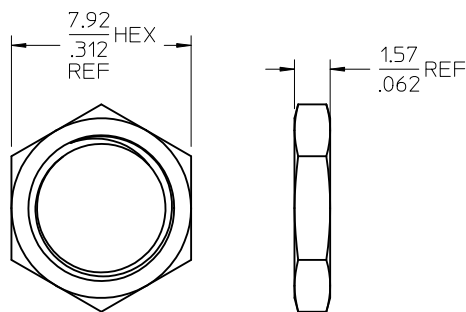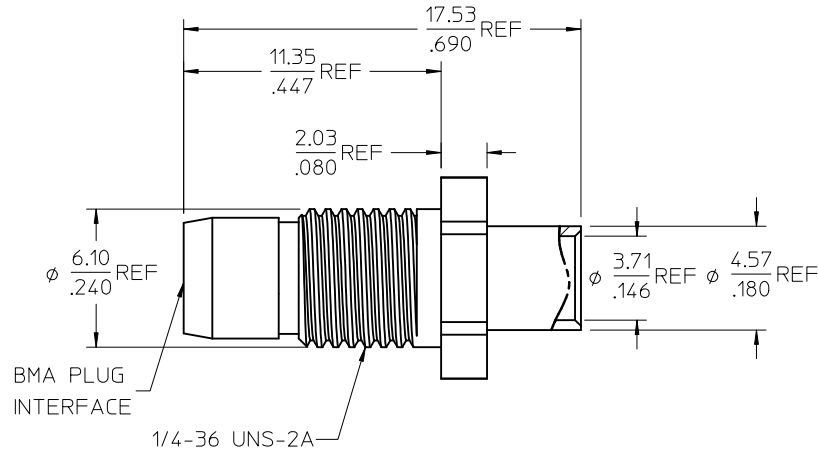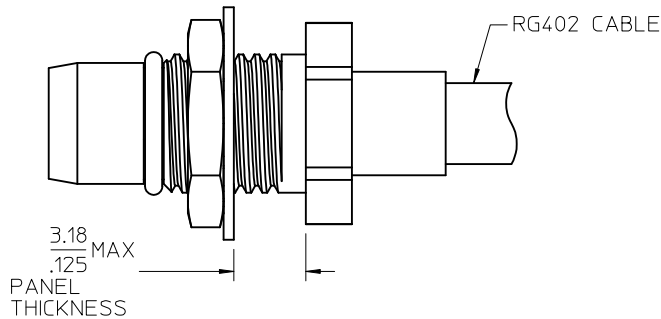


JAM NUT

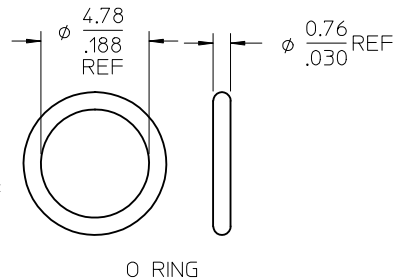

O RING

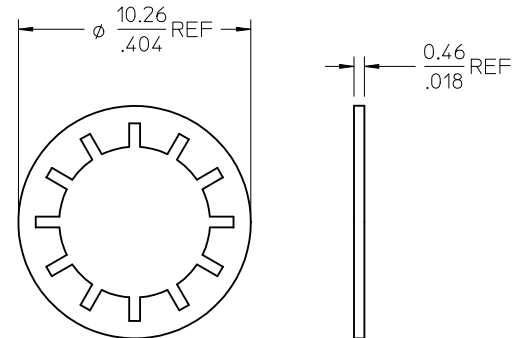

LOCKWASHER



RG402 CABLE