

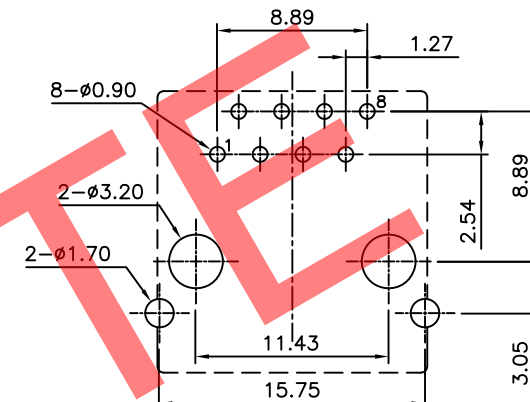
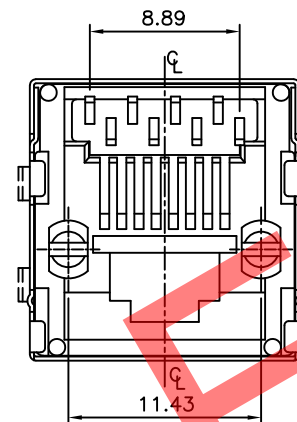


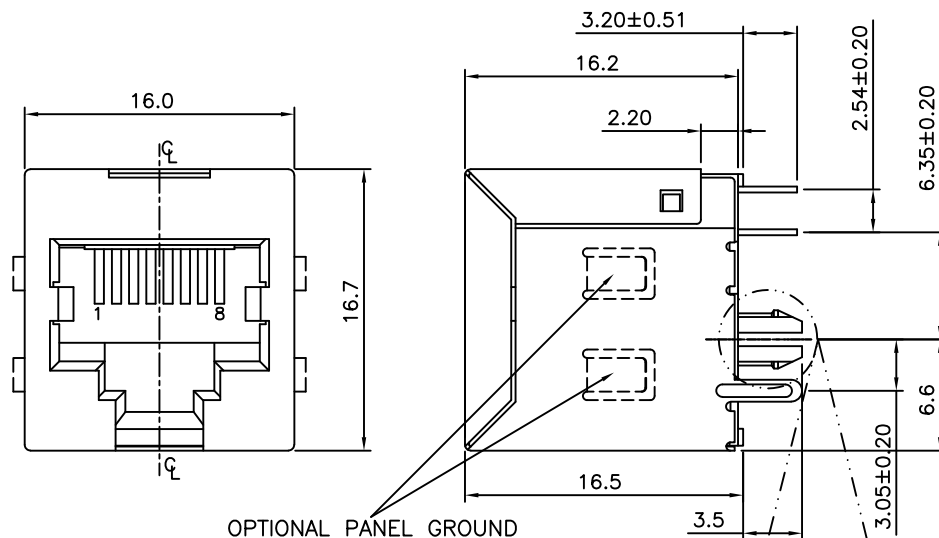

RECOMMENDED PCB LAYOUT
AS VIEWED FROM COMPONENT SIDE

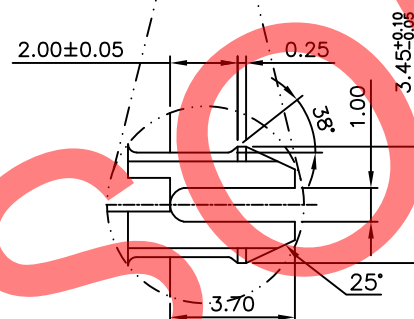

Specification 规格:

Electrical 电气规格:

Voltage Rating 电压额定值: 125 V AC (RMS)

Current Rating 电流额定值: 1.5 Amp

Contact Resistance 接触电阻值: 30mΩ Max.

Insulation Resistance 绝缘电阻值: 1000MΩ Min. @ 500 VDC

Dielectric Strength 铁壳材料: 1000 VAC RMS 60Hz, 1 Min.

Pin to Pin 针对针: 1000 VAC RMS 60Hz, 1 Min.

Pin to Shield 针对铁壳: 1500 VAC RMS 60Hz, 1 Min.

Material 物料规格:

Housing Material 塑胶外壳: High Temp Nylon UL94V-0 or
Glass Filled Polyester,
Black

Contact Material 端子材料: Phosphor Bronze 0.35mm Thickness

Shield Material: Copper C2680, Nickel Plated

Plating 电镀规格: Gold Plating over Nickel

Operating Life 使用寿命: 750 Cycles Min.

PCB Retention Force Before Solder 焊接前保持力: 1 LB Min.

PCB Retention Force After Solder 焊接后保持力: 10 LBS Min.

Ordering Grid


MJ3115-88-X-X-X Request Samples and Quotation

No. of Positions/
Positions Loaded
88=8/8

Panel Ground
0=Without (Standard)
1=With

Insulator Material
N=High Temp Nylon (Standard)
P=Glass Filled Polyester

Contact Plating
2=6μ" Gold (Standard)
4=30μ" Gold



Environmental 环境的:

Storage Temperature 储存温度: -40°C to +85°C

Operation Temperature 使用温度: -40°C to +85°C

Part Number			Product Description		
MJ3115 - 8 Position			Modular Jack Connector, 8 Position, Category 3,		
Drawing Date			Vertical, Through Hole, Shielded, Optional Panel Ground		
11th May 2010					
By	CC	Tolerances (Except as Noted)		Units:	



This drawing is confidential and
copyright of Global Connector
Technology, Ltd (GCT).
This drawing must not be copied
or disclosed without written
consent. E & OE


GCT
www.gct.co

Not to Scale
Drawn By
AJO
Sheet No.
1/2

1. Packing Material 包材 - Tray 1 PC

Quantity 數量 - 1*60=60 PCS



Tray: Body and Cover 真空盒上下蓋各 - 1PC Each
Label 标签 - 1 PC

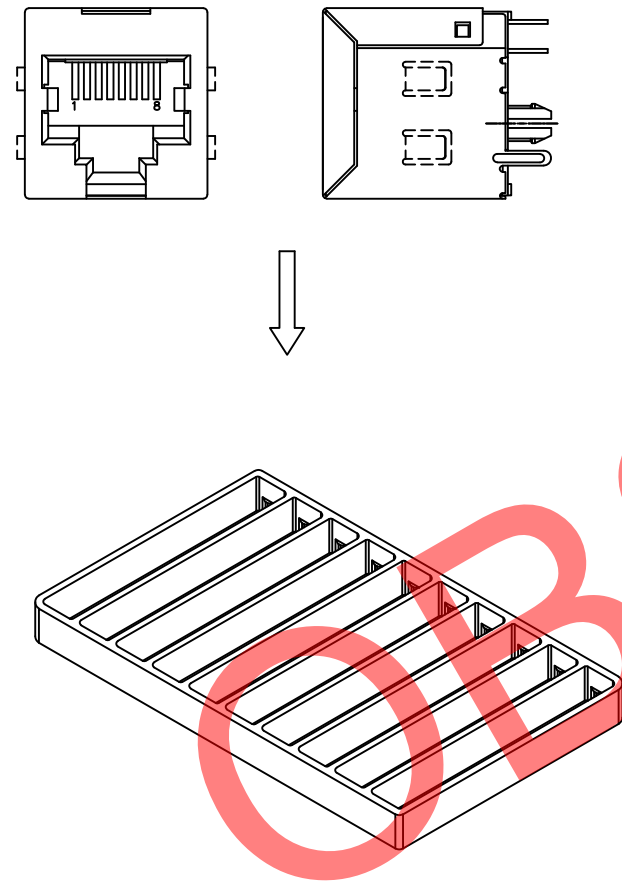

2. Packing Material 包材 - Carton - 380*315*290 - 1 PC

Quantity 數量 - 60*24=1440 PCS

Part Number 零部件料号	Net Weight 淨重	Gross Weight 毛重	Q'TY 數量
MJ3115-88-X-X-X	9.93Kg	10.25Kg	1400

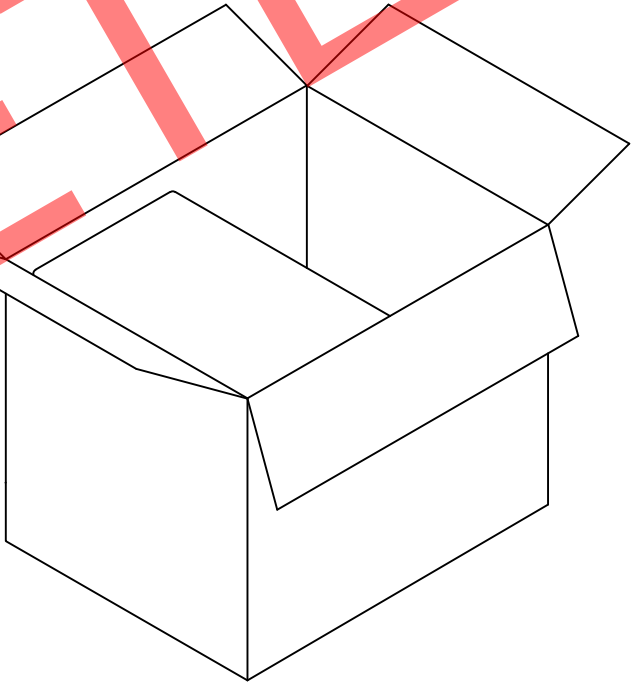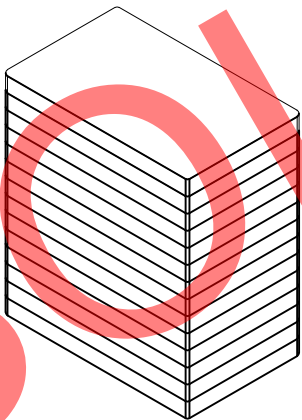

Part Number MJ3115 - 8 Position		Product Description Modular Jack Connector, 8 Position, Category 3, Vertical, Through Hole, Shielded, Optional Panel Ground				 www.gct.co	
Drawing Date 11th May 2010							
By CC		Tolerances (Except as Noted) Length Angle		Units: Metric (mm)	 This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE		
Detail Obsolete							
Revision Date	X 09/08/22			 3rd Angle Projection	 This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE		
					Not to Scale	Drawn By AJO	Sheet No. 2/2