

* Contact: Brass

CA21	**	S	A	1	*0
①	②	③	④	⑤	⑥


① Series No.
② No. of Circuits
③ Contact type: S= Socket

A= Selective Gold flash plated
over $1.27\mu\text{m}(50\mu'')$ Nickel


B= Selective $0.38\mu\text{m}(15\mu'')$
Gold plated over
 $1.27\mu\text{m}(50\mu'')$ Nickel

C= Selective $0.76\mu\text{m}(30\mu'')$
Gold plated over
 $1.27\mu\text{m}(50\mu'')$ Nickel


⑥ Other Options:
00= Standard
A0= Without Polarizing Rib

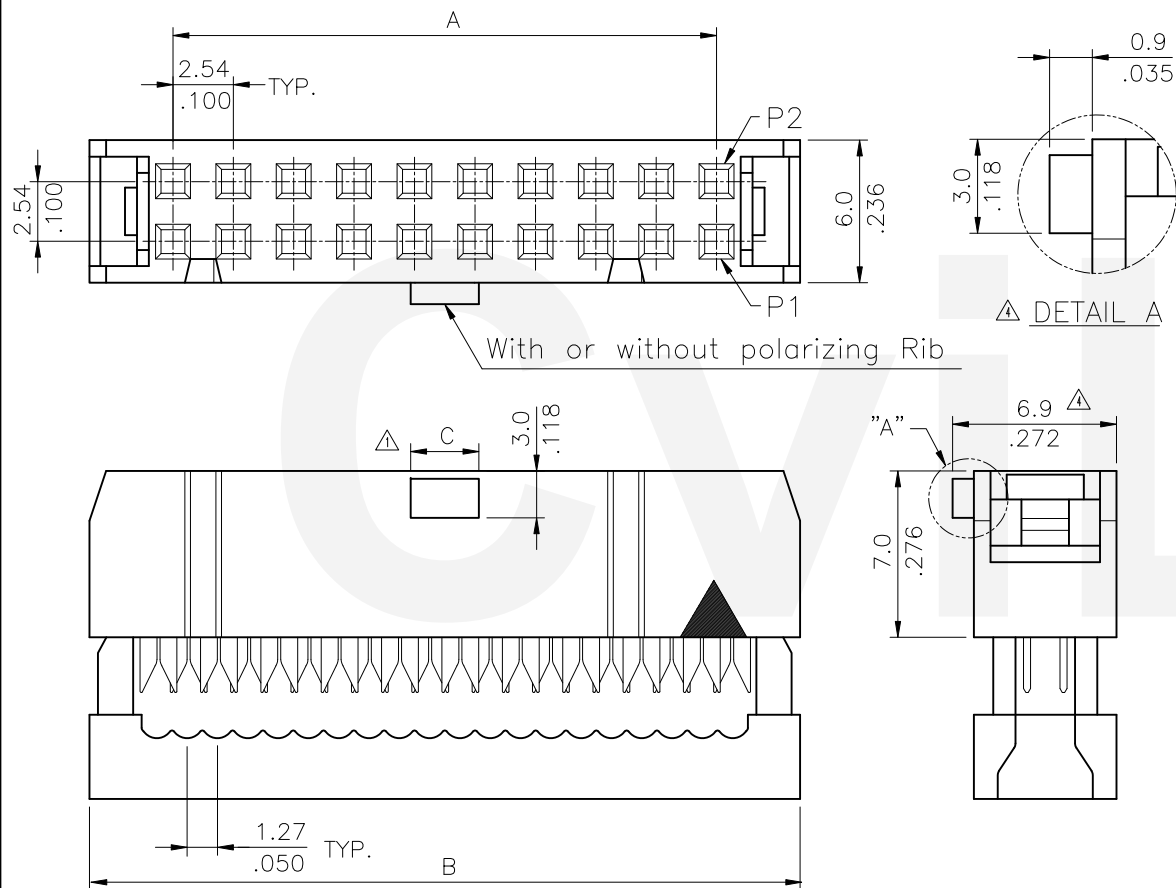

Circuits	Dimension		
	A	B	C
6	5.08(.200)	12.32(.472)	1.85(.072)
8	7.62(.300)	14.86(.585)	1.85(.072)
10	10.16(.400)	17.40(.685)	3.50(.138)
12	12.70(.500)	19.94(.785)	3.50(.138)
14	15.24(.600)	22.48(.885)	3.50(.138)
16	17.78(.700)	25.02(.985)	3.50(.138)
20	22.86(.900)	30.10(1.185)	3.50(.138)
24	27.94(1.100)	35.18(1.381)	3.50(.138)
26	30.48(1.200)	37.72(1.485)	3.50(.138)
30	35.56(1.400)	42.80(1.685)	3.50(.138)
34	40.64(1.600)	47.88(1.885)	3.50(.138)
36	43.18(1.700)	50.42(1.985)	3.50(.138)
40	48.26(1.900)	55.50(2.185)	3.50(.138)
44	53.34(2.100)	60.58(2.385)	3.50(.138)
50	60.96(2.400)	68.20(2.685)	3.50(.138)



6,8 Citcuits



10,12 Citcuits

RoHS Compliant

8	Yushu	12/12-19'	ECRT119066/ECNT120007	CVILUX 2020.01.30 ISSUED			DATE	UNIT: mm / inch	TITLE: 2.54MM(.100")	 瀚荃股份有限公司 CviLux Corporation			
7	Ken	2/12-19'	ECNT119043		DRAWN BY:	Yushu	1/9-20'	TOLERANCE UNLESS OTHERWISE SPECIFIED			RIBBON CABLE I.D.C. CONNECTOR		
6	Ken	1/9-17'	ECRB116097/ECNT117076		ENGINEER:	Sun	1/13-20'				MATERIAL:		
5	Kevin	4/8-09'	ECN09188		CHECKED BY:	Eisley	1/20-20'	.X ± 0.30/.012	X: ± 1"		FINISH:		
								.XX ± 0.20/.008	.X ±				
SYM	NAME	DATE	REVISIONS		APPROVED BY:	Eisley	1/20-20'	.XXX ± 0.10/.004	.XX ±	DRAWING NO. CA2101SM	PART NO. CA21**S*1*0		
										SCALE	3 / 1	SHEET	1 OF 1