

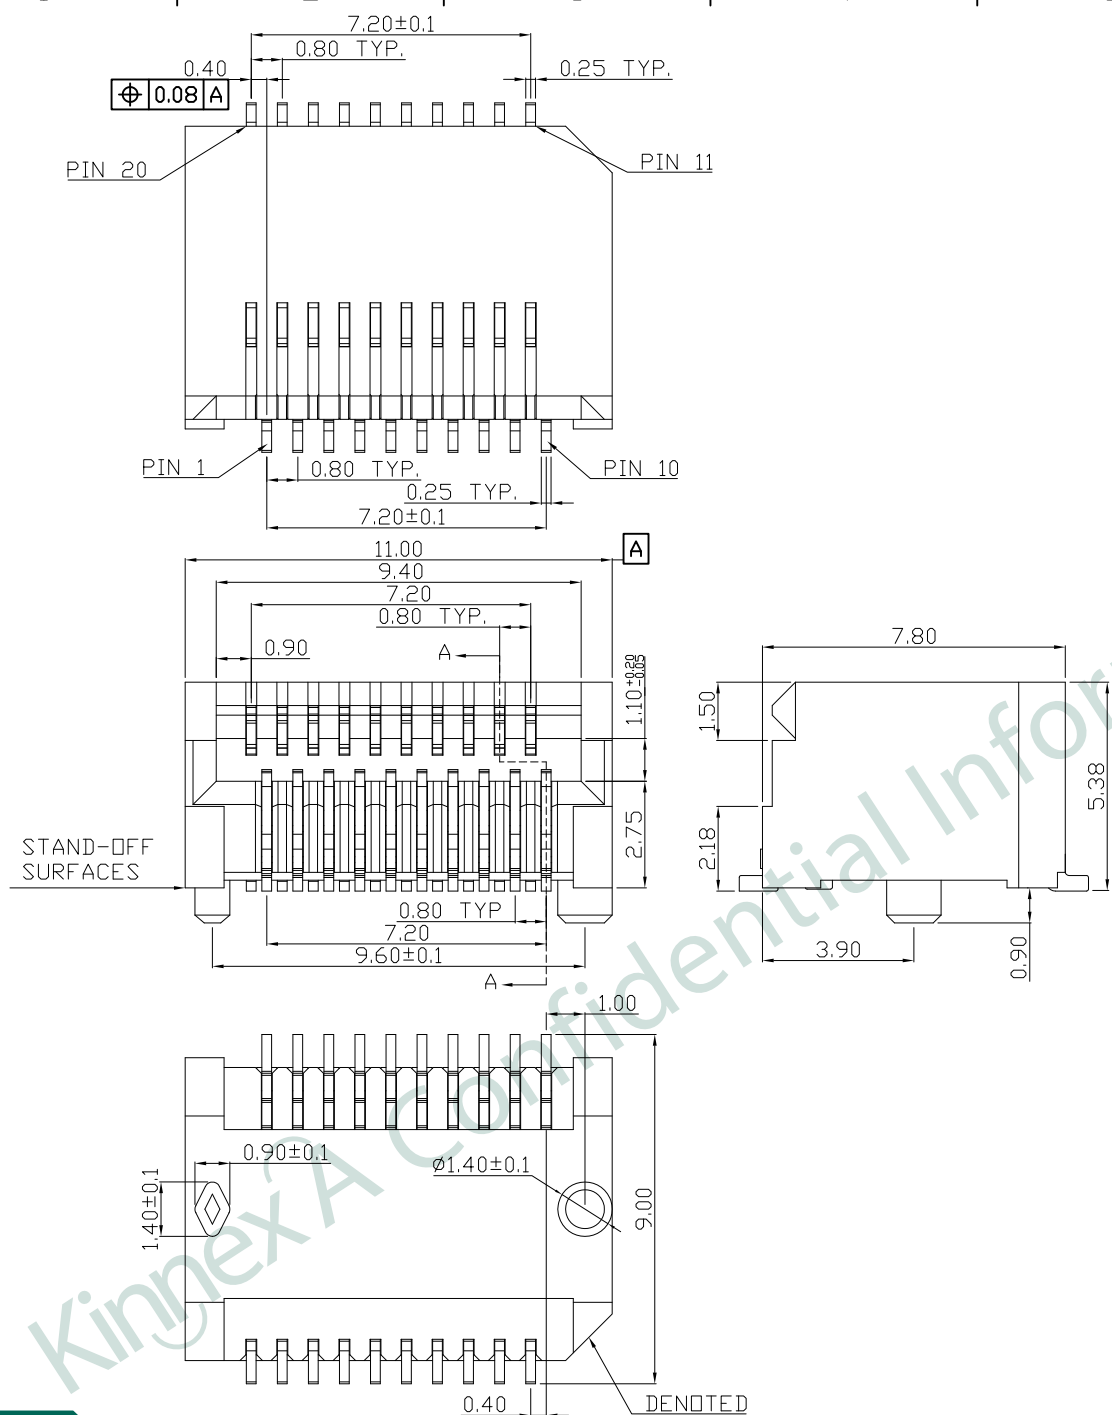
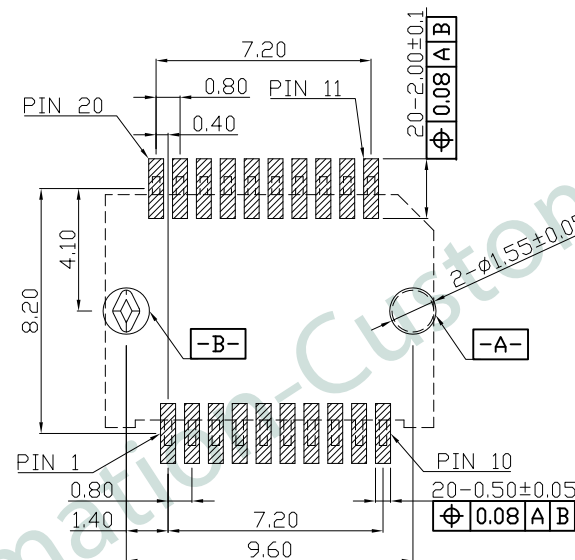


REV.	DATE	DESCRIPTION
01	Jul. 05, '18	1st RELEASE

- NOTES:
- MATERIAL:
HOUSING: LCP 40% G/F, FILLED, UL94V-0, BLACK
CONTACT: T=0.25mm PHOS-BRONZE, 15u" GOLD PLATING
ON CONTACT AREA, MATTE TIN AND NICKEL PLATING
 - CURABILITY TEST: 250 CYCLES MIN.
 - SPECIFICATION:
DIELECTRIC STRENGTH: AC 300V/MINUTE
INSULATOR RESISTANCE: 500 Mohm MIN.
CONTACT RESISTANCE: 35 mohm MAX.
OPERATING TEMPERATURE: -40°~+85°
 - UNSPECIFIED TOLERANCE: .XXX ±0.15
.XX ±0.25
.X ±0.30

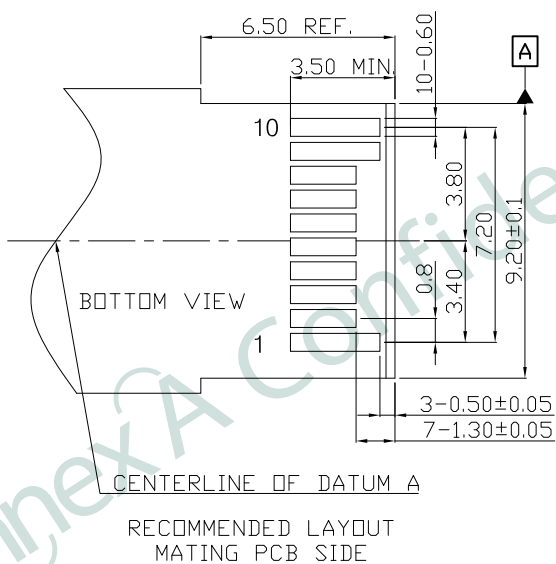

PART NO KSFP-N-SSM0-2008				
TITLE	SFP CONNECTOR PITCH 0.80mm, 20 PIN SMT TYPE			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	VINCENT	Jul. 05, '18	1 of 2

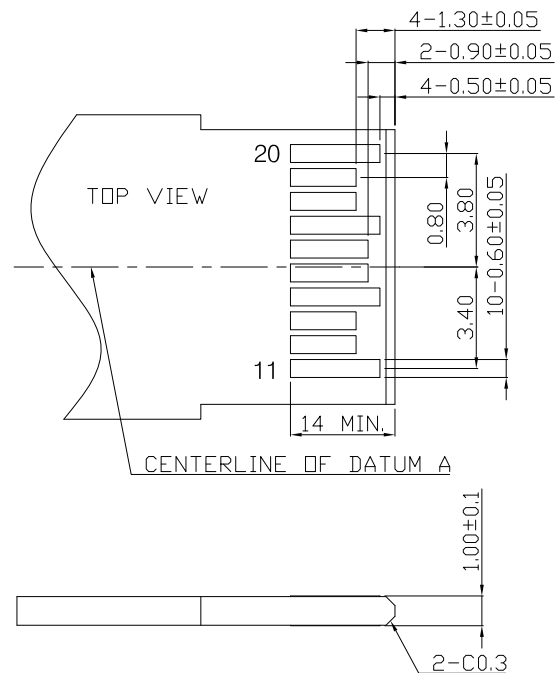

RECOMMENDED PCB LAYOUT(TOP VIEW)
(ALL TOLERANCES ARE ±0.05)

KSFP-N-SSM0-2008

TYPE
N: CONNECTOR
S: STANDARD
SMT
0: N/A
SERIAL NUMBER
0: W/O LIGHT PIPE
NUMBER OF PIN

PART NO KSFP-N-SSM0-2008				
TITLE		SFP CONNECTOR PITCH 0.80mm, 20 PIN SMT TYPE		
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	VINCENT	Jul. 05, '18	2 of 2