



## 2 dBi Embedded PCB Antenna 860-960 MHz UMCX Connector

### Antennas Technical Data Sheet

PE51216

#### Features

- Highly efficient printed circuit board (PCB) design
- Designed for omni-directional applications
- Low profile, compact size
- IPEX, U.FL, UMCX compatible connector

#### Applications

- Integrate into self contained wireless equipment
- Embedded applications requiring integration flexibility
- 800 MHz & 900 MHz

#### Description

The PE51216 is a 900 MHz omni-directional antenna designed to directly integrate into devices requiring wireless capability. By embedding these antennas directly into a device, the need for external antennas is eliminated. The omni-directional design of the PE51216 makes it ideal for multipoint and mobile wireless systems since it provides 360° of coverage. This antenna features a 1.13mm coax lead terminated with a U.FL/IPX connector. Custom cable lengths and connector options are also available.

#### Configuration

|                   |                  |
|-------------------|------------------|
| Design            | PCB              |
| Application Band  | RFID  LPWAN  ISM |
| Band Type         | Single           |
| Radiation Pattern | Omni Directional |
| Polarization      | Vertical         |
| Cable Type        | 1.13mm           |
| Cable Length      | 3 in [76.2 mm]   |
| Connector Type    | UMCX Plug        |
| Number of Ports   | 1                |

#### Electrical Specifications

| Description     | Minimum | Typical | Maximum | Units |
|-----------------|---------|---------|---------|-------|
| Frequency Range | 860     |         | 960     | MHz   |
| Input VSWR      |         | 3:1     | 3:1     |       |
| Impedance       |         | 50      |         | Ohms  |
| Gain            |         | 2       |         | dBi   |

#### Specifications by Band

| Description           | Band 1  | Band 2 | Band 3 | Band 4 | Band 5 | Units   |
|-----------------------|---------|--------|--------|--------|--------|---------|
| Range                 | 860-960 |        |        |        |        | MHz     |
| Horizontal Beam Width | 360     |        |        |        |        | Degrees |
| Vertical Beam Width   | 58      |        |        |        |        | Degrees |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 dBi Embedded PCB Antenna 860-960 MHz UMCX Connector PE51216](#)



## 2 dBi Embedded PCB Antenna 860-960 MHz UMCX Connector

### Antennas Technical Data Sheet

PE51216

#### Mechanical Specifications

|                 |                    |
|-----------------|--------------------|
| Radome Material | ABS                |
| <b>Size</b>     |                    |
| Overall Length  | 2.11 in [53.59 mm] |
| Width           | 1.61 in [40.89 mm] |
| Height          | 0.06 in [1.52 mm]  |
| Weight          | 0.06 lbs [27.22 g] |

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

2 dBi Embedded PCB Antenna 860-960 MHz UMCX Connector from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 dBi Embedded PCB Antenna 860-960 MHz UMCX Connector PE51216](#)


URL: <https://www.pasternack.com/single-antenna-860-960-mhz-2-dbi-gain-umcx-pe51216-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE51216 CAD Drawing

2 dBi Embedded PCB Antenna 860-960 MHz UMCX Connector

| REVISIONS |                 |            |          |
|-----------|-----------------|------------|----------|
| REV.      | DESCRIPTION     | DATE       | APPROVED |
| A         | INITIAL RELEASE | 06/18/2020 | KH1ETPAS |

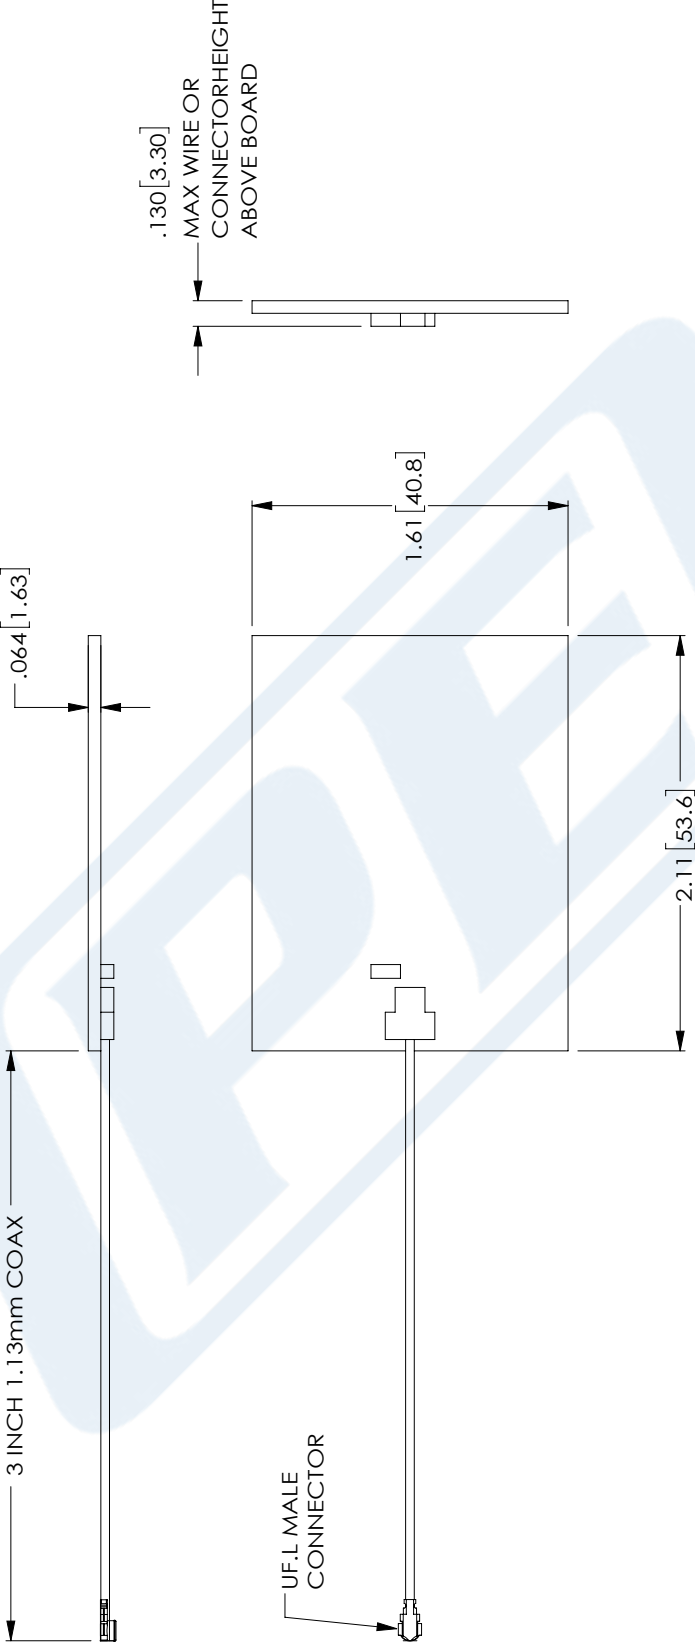

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

**TOLERANCES:**

|               |       |             |
|---------------|-------|-------------|
| .X = ± .2     | [.08] | FRACTIONS   |
| .XX = ± .02   | [.51] | ± 1/32      |
| .XXX = ± .005 | [.13] | ANGLES ± 1° |

**CABLE LENGTH (L) TOLERANCES:**

|                             |            |      |
|-----------------------------|------------|------|
| L ≤ 12 [305]                | ± .1 [25]  | / -0 |
| 12 [305] < L ≤ 60 [1524]    | ± .2 [51]  | / -0 |
| 60 [1524] < L ≤ 120 [3048]  | ± .4 [102] | / -0 |
| 120 [3048] < L ≤ 300 [7620] | ± .6 [152] | / -0 |
| 300 [7620] < L              | ± .5%      | / -0 |

ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.

**PE PASTERNAK**  
an INFINITE brand

Pasternack Enterprises, Inc.  
P.O. Box 16759, Irvine, CA 92623.  
Phone: 1.949.261.1920 | 1.866.727.8376  
Fax: 1.949.261.7451  
Website: [www.pasternack.com](http://www.pasternack.com)  
E-mail: [sales@pasternack.com](mailto:sales@pasternack.com)

THIRD-ANGLE PROJECTION

THE INFORMATION AND  
DESIGN IN THIS DOCUMENT  
IS THE PROPERTY OF  
PASTERNAK CORPORATION  
ALL RIGHTS RESERVED.

|       |     |    |   |
|-------|-----|----|---|
| SHEET | 1   | OF | 1 |
| SCALE | N/A |    |   |

|      |           |          |          |
|------|-----------|----------|----------|
| SIZE | CAGE CODE | DRAWN BY | ITEM NO. |
| A    | 53919     | SLI      | PE51216  |

REV  
A

**REGULATORY COMPLIANCE:**  
EU ROHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.