

4G/LTE Ceramic Chip Antenna



ACAR3705-S698



37.0 x 5.0 x 5.0 mm
RoHS/RoHS II Compliant
MSL = NA

Features

- 4G/LTE full band coverage (700~960 MHz, 1710~2170 MHz, 2500~2700MHz)
- 2G/3G/GSM support
- Compact size
- Linear polarization

Applications

- IoT
- M2M
- 4G/LTE/3G/2G/GSM applications
- Telecommunications
- Networking
- Wireless modules
- Mobile devices
- Consumer electronics
- Broadband cellular connectivity
- Video and surveillance

Electrical Characteristics

Item	Spec*		Comments
Working Frequency Range	700~960 MHz / 1710~2170 MHz / & 2500~2700 MHz		Covers 4G LTE
VSWR	4.5 : 1 max		Depends on the environment
Peak Gain	1.07 / 4.03 / 3.76 dBi		
Efficiency	700~960 MHz	55%	
	1710~ 2170MHz	70%	
	2500~2700MHz	50%	
Polarization	Linear		
Impedance	50 Ω		
Terminations	Ag		Environmentally Friendly Pb Free
Operating Temperature	-40°C ~ 85°C		
Storage Temperature	-40°C ~ 85°C		

* Data collected per Table on standard evaluation board size 45 x 120 mm, and under the environmental conditions of +40°C and 0-95% relative humidity.

** Actual Electrical value will depend on customer ground plane size

4G/LTE Ceramic Chip Antenna




ACAR3705-S698




37.0 x 5.0 x 5.0 mm
RoHS/RoHS II Compliant
MSL = NA

Dimensions

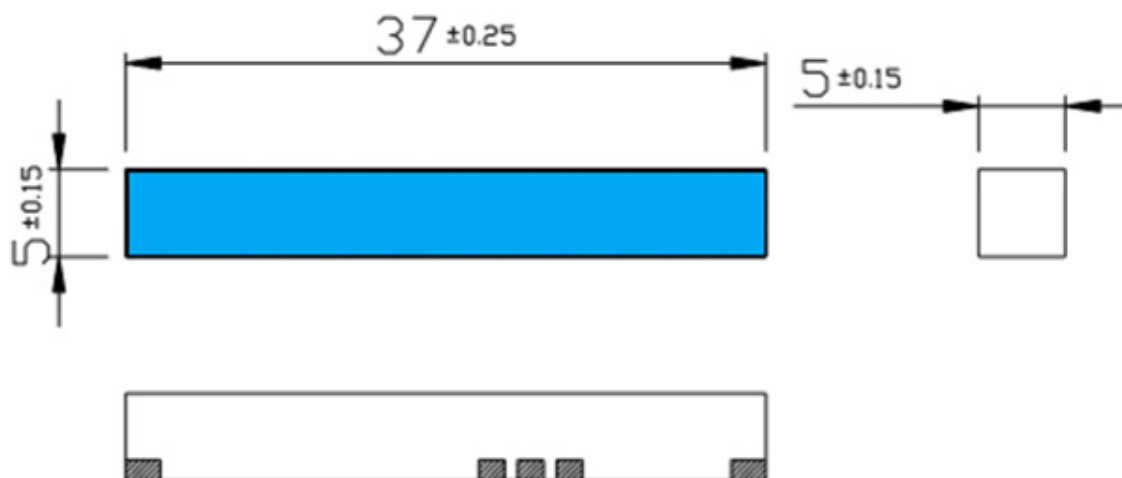

Unit:mm

Evaluation Board and Dimensions

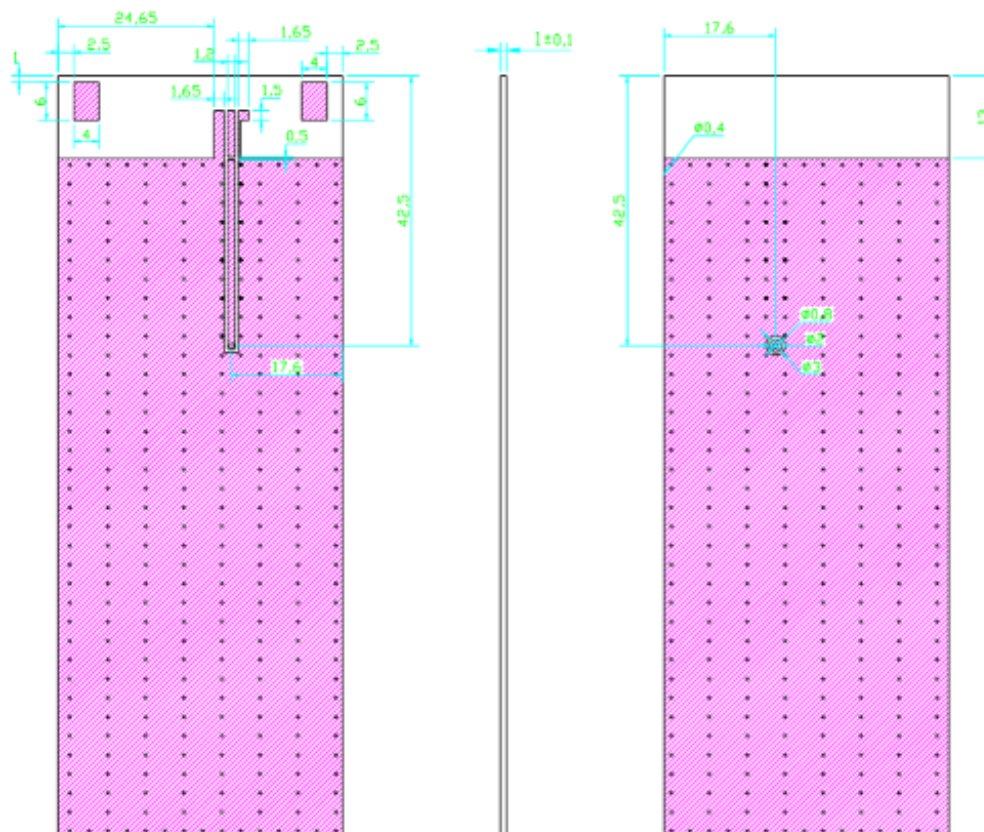

4G/LTE Ceramic Chip Antenna




ACAR3705-S698




37.0 x 5.0 x 5.0 mm
RoHS/RoHS II Compliant
MSL = NA

Recommended Layout Dimensions

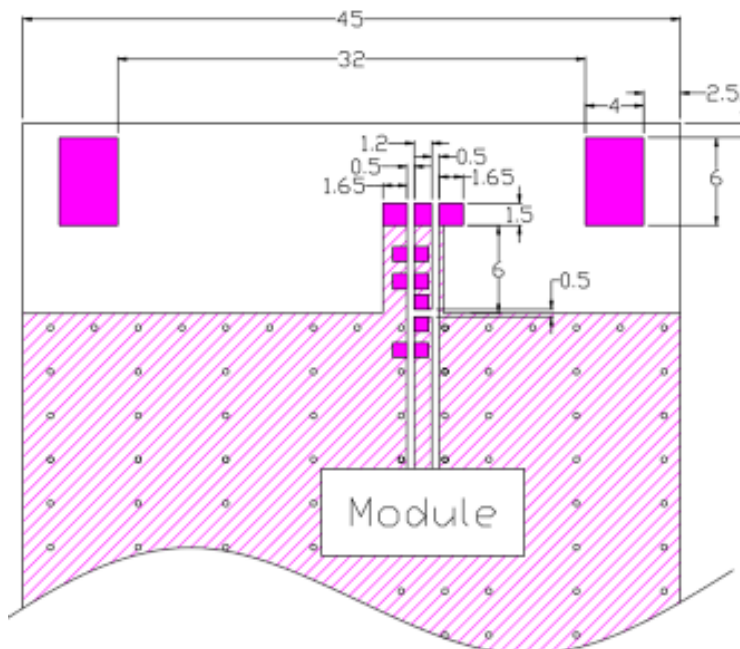

Unit: mm

Recommended Layout from Evaluation Board

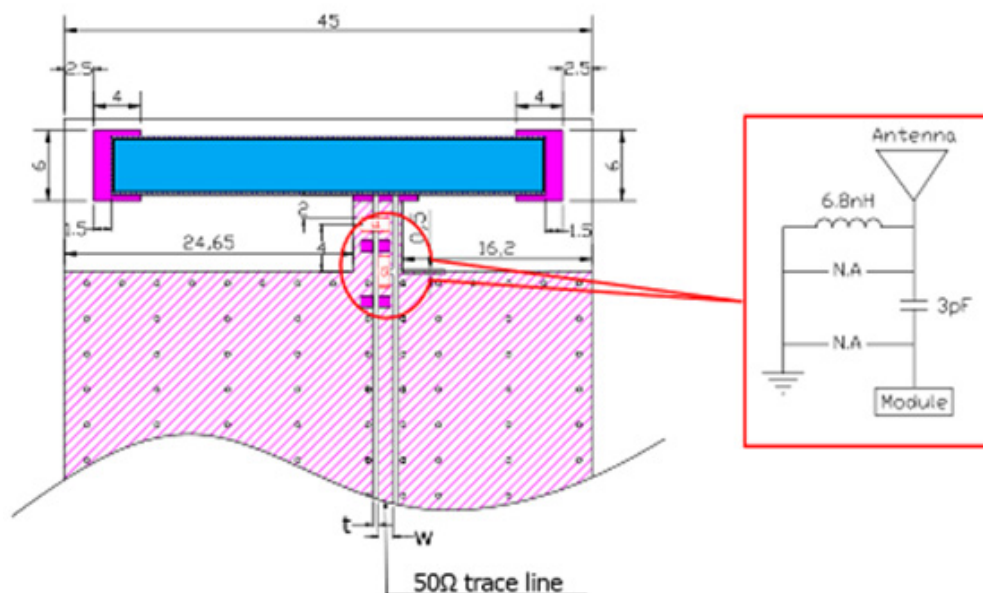

T and w = Unique dimensioning according to your PCB design.

Unit: mm

4G/LTE Ceramic Chip Antenna




ACAR3705-S698




37.0 x 5.0 x 5.0 mm
RoHS/RoHS II Compliant
MSL = NA

Evaluation Board showing position of match components and solder pads

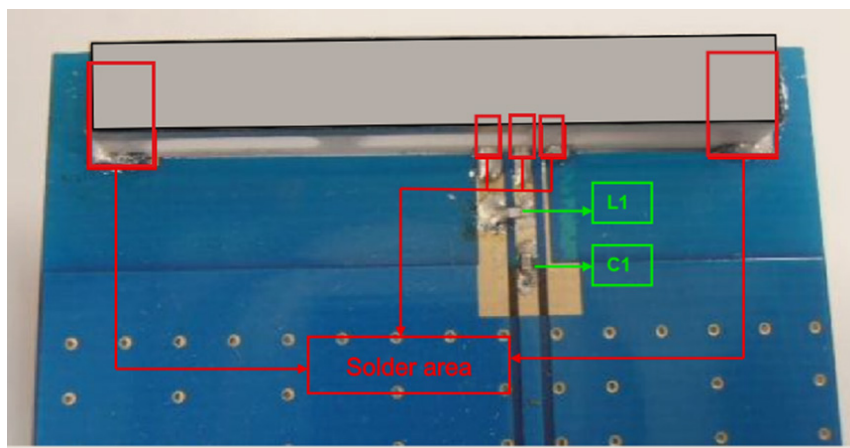

Circuit Symbol	Size	Description
L1	0402	6.8nH
C1	0402	3pF Capacitor

Antenna Response – Return Loss S11

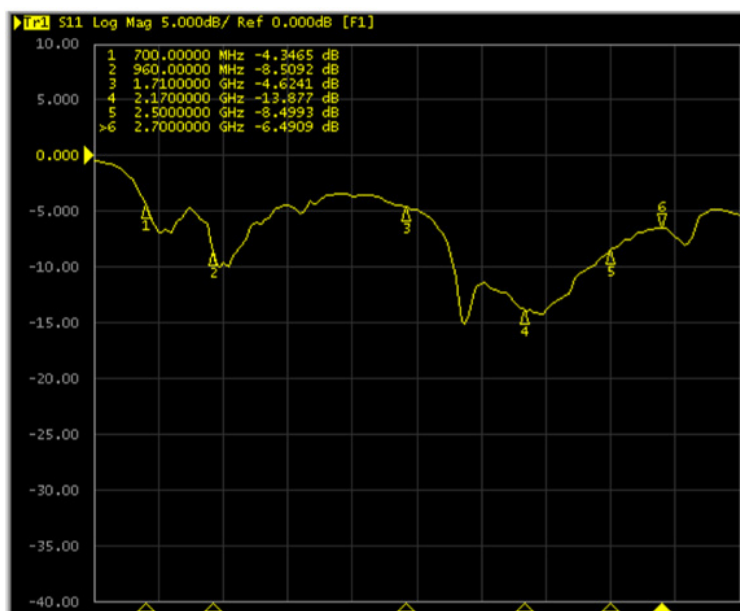

4G/LTE Ceramic Chip Antenna




ACAR3705-S698




37.0 x 5.0 x 5.0 mm
RoHS/RoHS II Compliant
MSL = NA

Antenna SWR

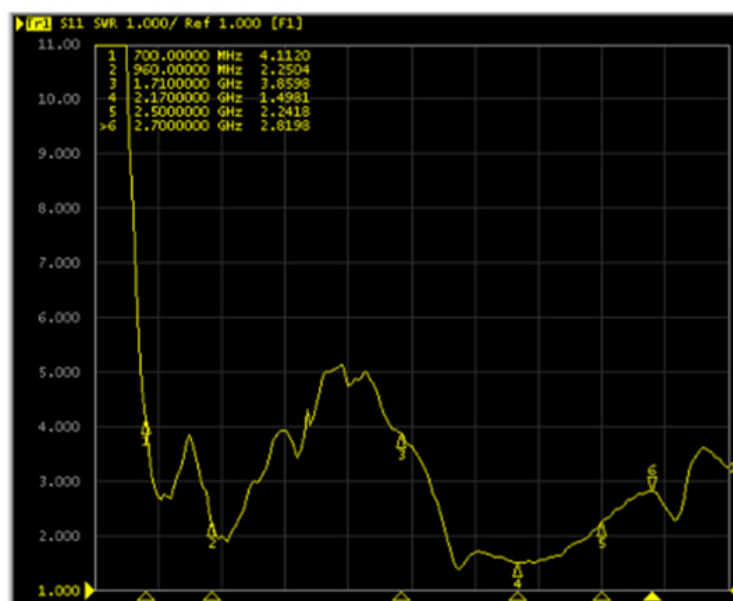

Antenna Smith Chart

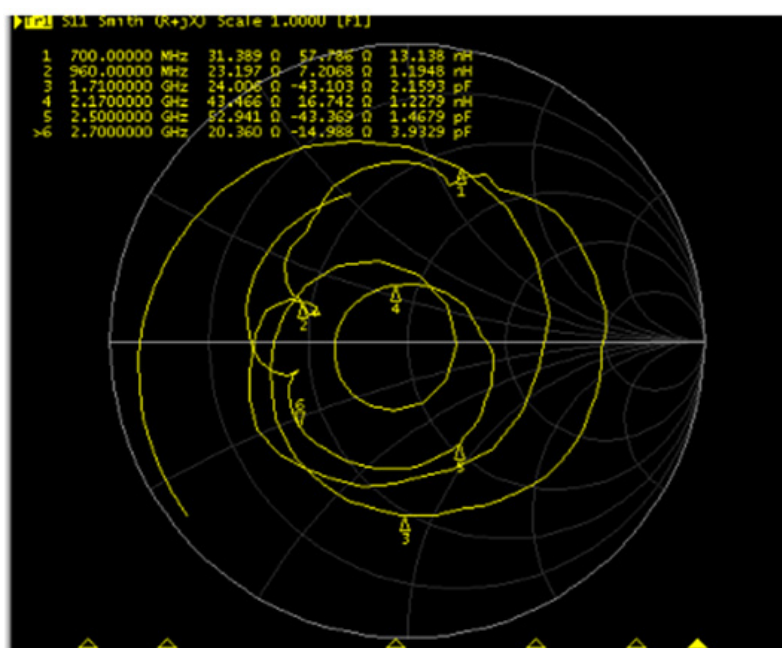

4G/LTE Ceramic Chip Antenna




ACAR3705-S698




37.0 x 5.0 x 5.0 mm
RoHS/RoHS II Compliant
MSL = NA

Measurements on Standard Evaluation Board


Antenna Efficiency

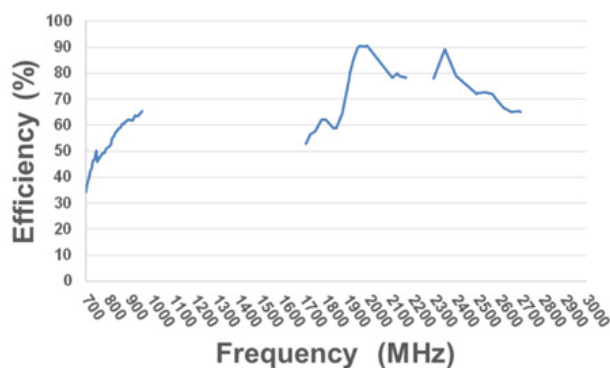

Peak Gain

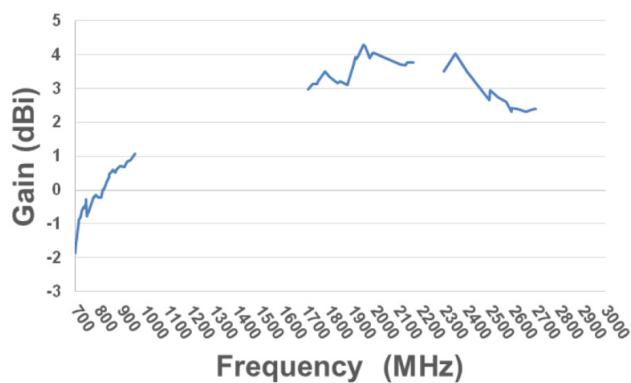

Average Gain

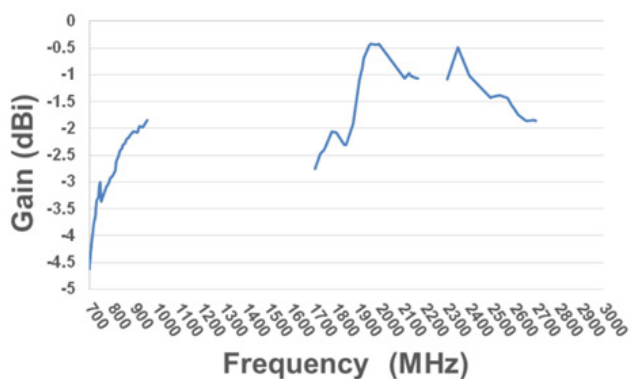

4G/LTE Ceramic Chip Antenna



ACAR3705-S698



37.0 x 5.0 x 5.0 mm
RoHS/RoHS II Compliant
MSL = NA


Antenna Performance

Antenna Performance Summary on the 45 x 120 mm Evaluation Board

Frequency Band (MHz)	700	824	960	1710	1850	1990	2170	2500	2700
Efficiency (%)	35.12	54.26	65.49	53.03	58.87	90.53	78.19	72.31	65.10
Average Gain (dBi)	-4.54	-2.57	-1.83	-2.75	-2.30	-0.43	-1.06	-1.40	-1.86
Peak Gain (dBi)	-1.80	0.016	1.07	2.97	3.21	4.03	3.76	2.96	2.38

Antenna Efficiency Versus Ground Plane Length

Reference Efficiency vs Ground Plane Length

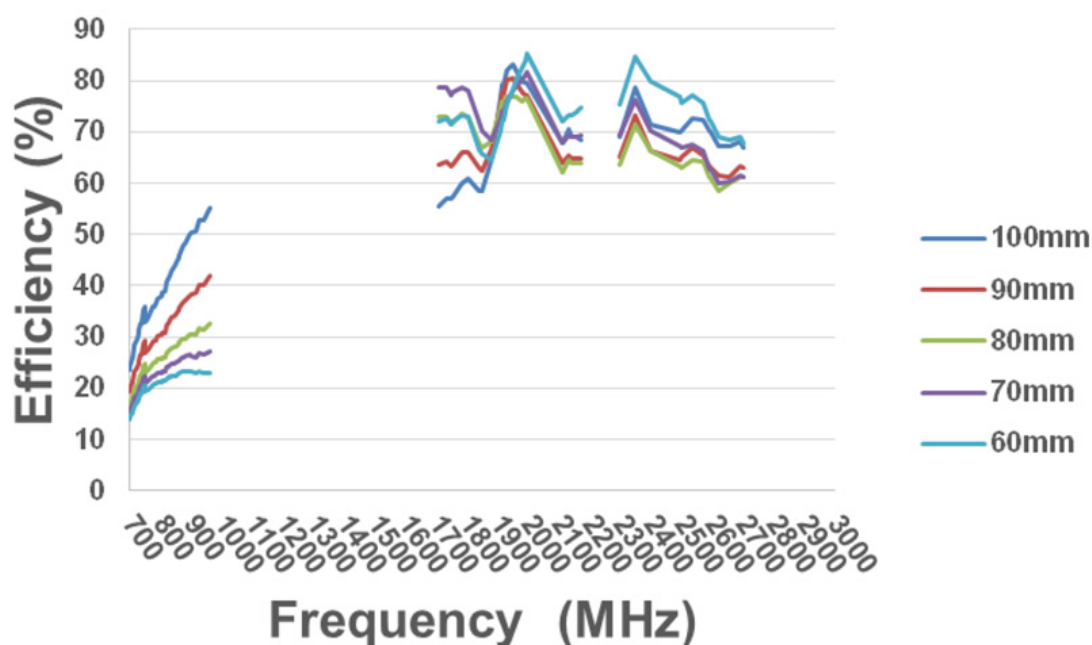

4G/LTE Ceramic Chip Antenna




ACAR3705-S698




37.0 x 5.0 x 5.0 mm
RoHS/RoHS II Compliant
MSL = NA

Antenna 3D Radiation Patterns – Evaluation Board

Coordinates

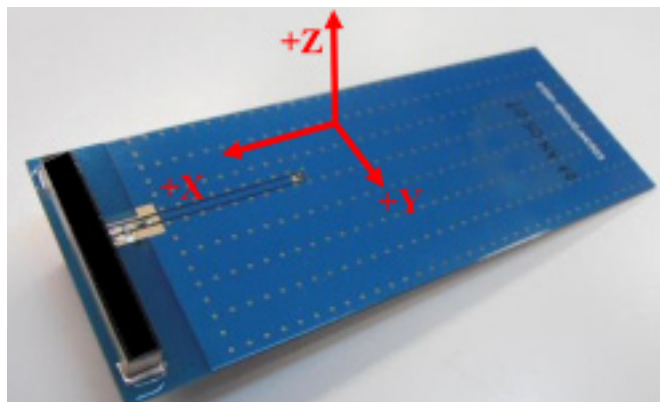

Radiation patterns (3D)

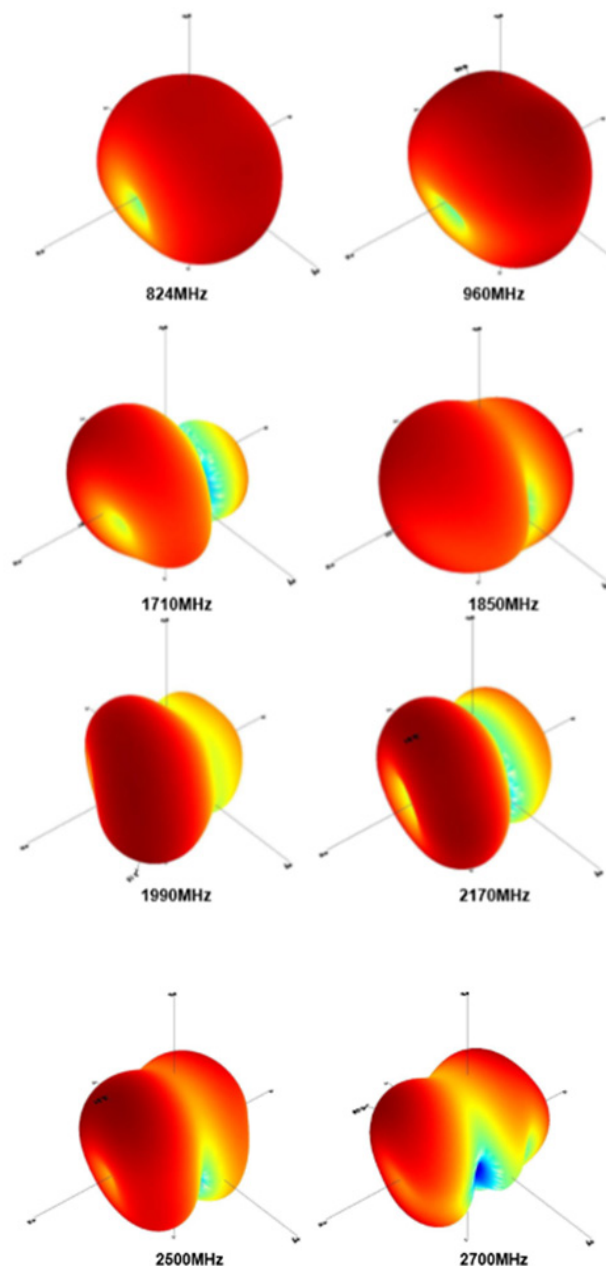

4G/LTE Ceramic Chip Antenna



ACAR3705-S698




37.0 x 5.0 x 5.0 mm
RoHS/RoHS II Compliant
MSL = NA

Reflow Soldering Standard Condition

ACAR3705-S698 can be assembled as per the Pb-free assembly given below.

Phase	Profile Features	Pb-Free Assembly (SnAgCu)
Preheat	-Temperature Min (T _{smin}) -Temperature Max (T _{smax}) -Time (T _{smin} to T _{smax})	150°C 200°C 60-120 seconds
Ramp-Up	Avg Ramp-Up Rate (T _{smax} to T _p)	3°C /second(max)
Reflow	-Temperature (T _L) -Total Time above T _L (t _L)	217°C 60-150 seconds
Peak	-Temperature (T _p) -Time(t _p)	260°C 20 - 30 second
Ramp-Down	Rate	6°C / second max.
Time from 25°C to Peak Temperature		8 minutes max.
Composition of solder plate		96.5Sn/3Ag/0.5Cu
Solder Paste Model		SHENMAO PF606-P26

According to the Standard IPC/JEDEC J-STD-020C, the temperature profile suggested is as follow:

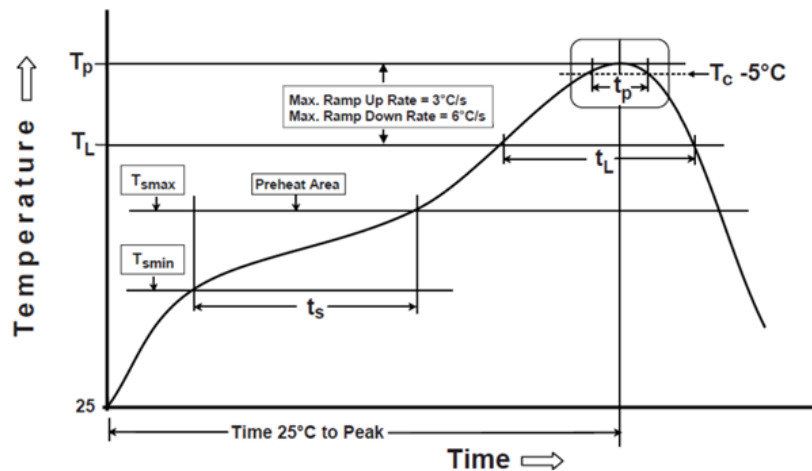

Note: All the temperature measurement points are on the component's top surface. If the applied temperature is over recommended, the component's surface will start to peel or damage.

Soldering with Iron:

Soldering iron temperature : 270±10 °C

Apply preheating at 120 C for 2-3 minutes and complete the soldering for each terminal within 3 seconds.

Note: If the applied temperature is over recommended or if the time exceeds the stated, the component's surface will start to peel or damage.

4G/LTE Ceramic Chip Antenna




ACAR3705-S698




37.0 x 5.0 x 5.0 mm
RoHS/RoHS II Compliant
MSL = NA

Packaging

Tape Dimensions (mm)

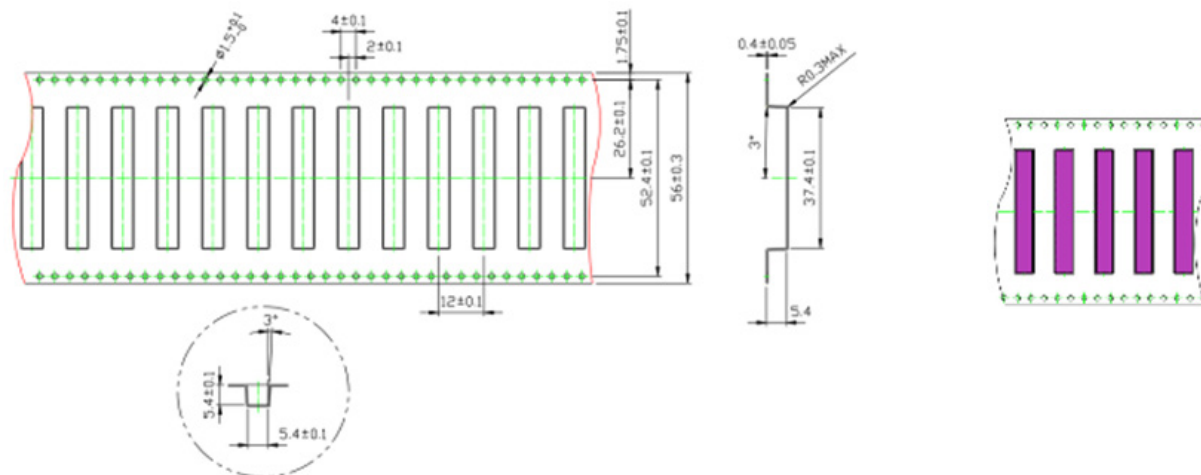

Reel Dimensions (mm)

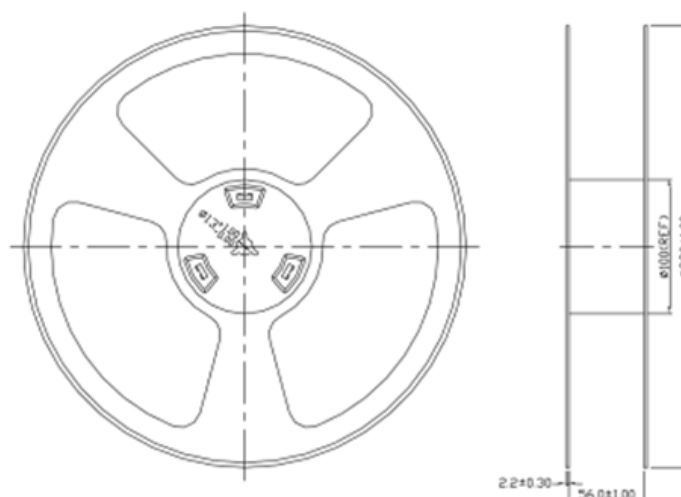

1. Blister tape to IEC 286-3, polyester.
2. Pieces per tape /reel: 450pcs

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 04.15.2021

ABRACON IS
ISO9001-2015
CERTIFIED