


CLIFF

60A. TERMINAL TP60

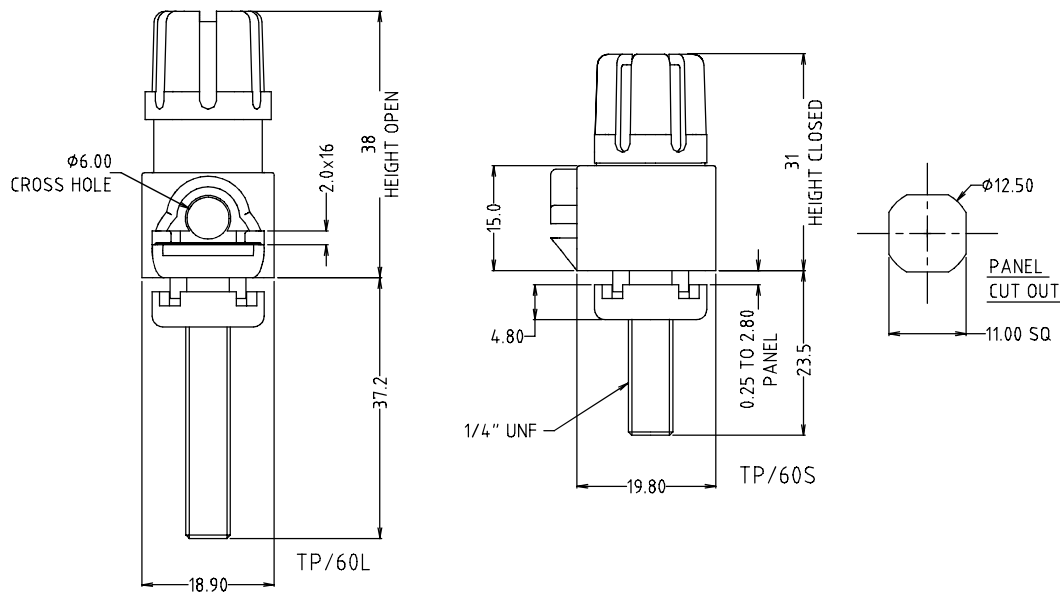

TP60L - 37.2mm spindle length

CL159791 - TP60L Black Nickel Plated

CL159792 - TP60L Black Gold Plated

CL159793 - TP60L Red Nickel Plated

CL159794 - TP60L Red Gold Plated



TP60S - 23.5mm spindle length

CL159795 - TP60S Black Gold Plated

CL159796 - TP60S Red Gold Plated

CL159797 - TP60S Black Nickel Plated


CL159798 - TP60S Red Nickel Plated



TP60C/SG - 23.5mm spindle length, 3mm slot

CL159801 - TP60C/SG Clear/Red Gold Plated

CL159802 - TP60C/SG Clear/Black Gold Plated

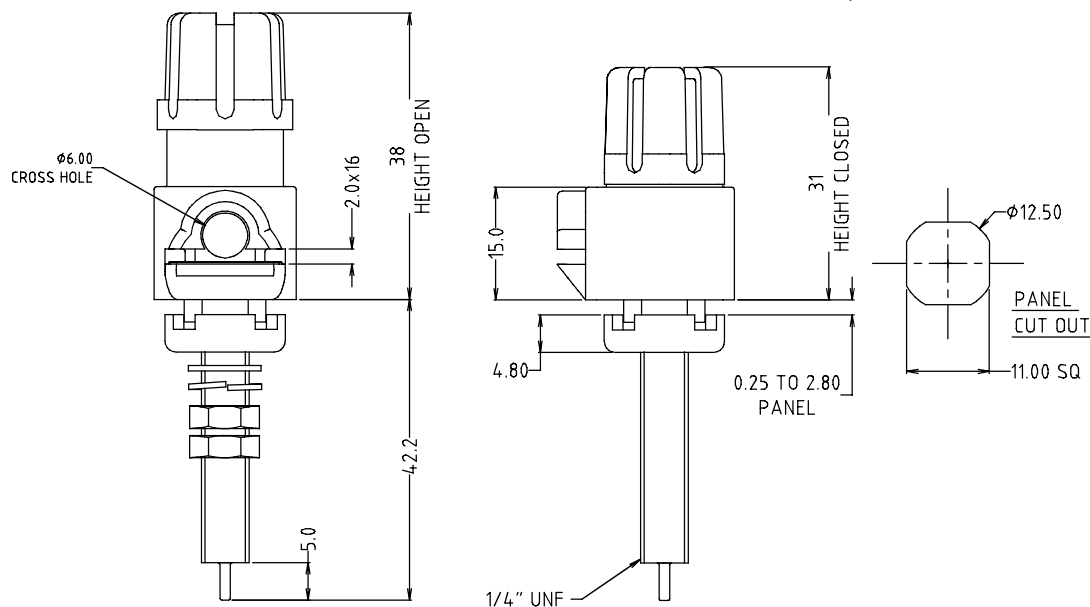

TP60P - PC Mounting

CL159791P - TP60P Black Nickel Plated

CL159791PG - TP60P Black Gold Plated

CL159793P - TP60P Red Nickel Plated

CL159793PG - TP60P Red Gold Plated

Specification

Maximum Current: 60A.

Contact Resistance: Nickel <30mΩ, Gold <20mΩ

Temperature Rating: -20°C to +80°C

Flammability: Minimum UL 94HB

For further information, contact sales@cliffuk.co.uk

Cliff Electronic Components Limited,

76 Holmethorpe Avenue, Holmethorpe Ind. Estate,
Redhill, Surrey RH1 2PF U.K.

Tel: +44 (0)1737 771375 Fax: +44 (0)1737 766012



Visit us online at:



www.cliffuk.co.uk