



soberton inc.

ELECTRO
MAGNETIC
BUZZER

Acoustic Product Specification

Product Number: ST-03BHT



Release | Revision: A/2022

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1
Specifications

Dimensions

Page 2
Reliability Test

Page 3
Electrical And Acoustical
Measuring Condition

Typical Frequency Response
Curve

Page 4
Surface Mounting Condition

Page 5
Packing

Specifications


Item	Unit	Specifications
Rated Voltage	Vo-p	3.6
Operating Voltage	Vo-p	2.5 ~ 4.5
Rated Current	mA	Max. 100 at 2.731KHz 50% duty cycle, square wave, 3.6Vo-p
Sound Output	dB	Min. 85 at 2.731KHz 50% duty cycle, square wave, 3.6Vo-p
Coil Resistance	Ω	16±3
Resonant Frequency	Hz	2731
Operating Temperature	°C	-20 ~ +70
Storage Temperature	°C	-30 ~ +80
Dimensions	mm	8.5 × 8.5 × H3.0
Housing Material		Black LCP
Terminal		SMD
Net Weight	gram	Approx. 0.6
Environmental Protection Regulation		RoHS 2.0

Measuring Condition:

Temperature: 5~35°C Humidity: 45%~85%R.H Atmospheric Pressure: 860 ~1060hPa

Dimensions

Unit: mm
Tolerance: ±0.3mm, except where specified

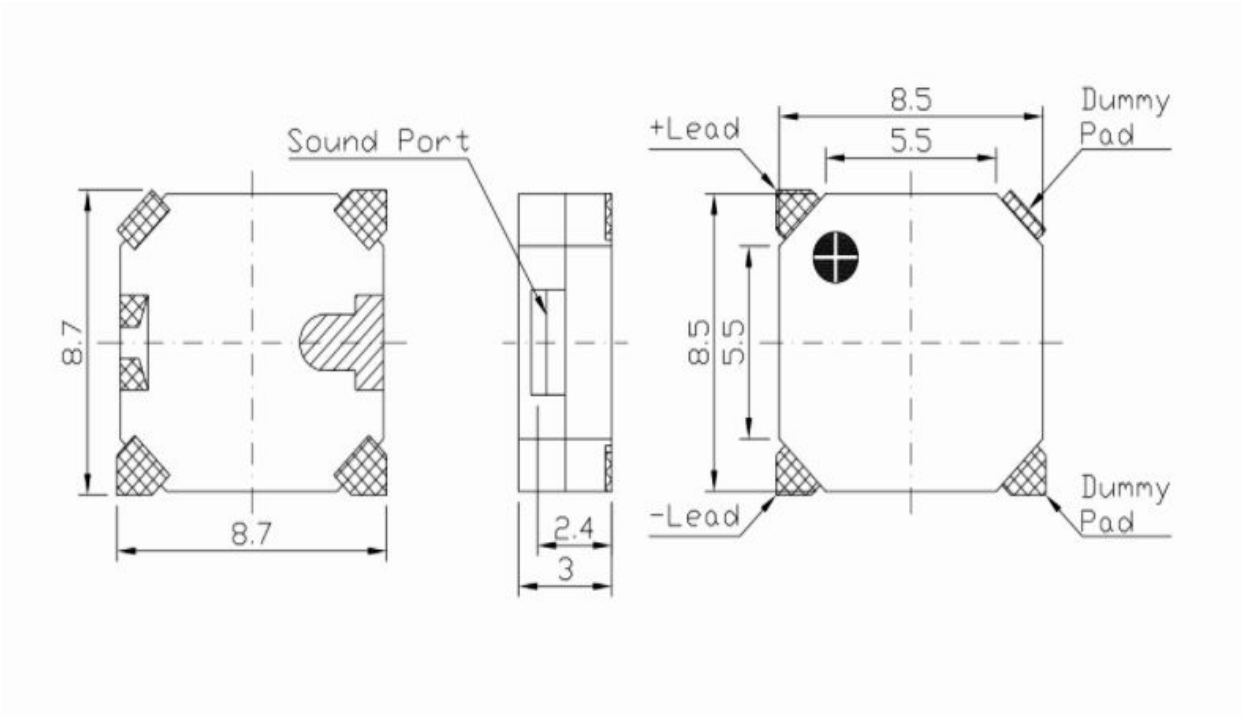

Housing Material: Black LCP
Leading Pin: Tin Plated Brass



soberton inc.

ELECTRO
MAGNETIC
BUZZER

Acoustic Product Specification

Product Number: ST-03BHT



Release | Revision: A/2022

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1
Specifications

Dimensions

Page 2
Reliability Test

Page 3
Electrical And Acoustical
Measuring Condition

Typical Frequency Response
Curve

Page 4
Surface Mounting Condition

Page 5
Packing

Reliability Test

After any of the following tests the part shall meet specifications without any degradation in appearance and performance, except SPL. SPL shall meet the specifications and shall not deviate more than -10dB from the initial value.

Standard Temperature Life Test

The part shall be subjected to 96 hours at 25±10°C.

Input rated voltage: 3.6 Vo-p

Resonant frequency: 2731Hz, 50% duty cycle, square wave.

High Temperature Test

The part shall be capable of withstanding a storage temperature of +80°C for 96 hours.

Low Temperature Test

The part shall be capable of withstanding a storage temperature of -30°C for 96 hours.

Humidity Test

Temperature +40°C±3°C

Relative Humidity 90% ~ 95%

Duration 48 hours and exposure to room temperature for 6 hours

Temperature Shock Test

Per cycle

70°C/1 hour → 25°C/3 hours → -30°C/1 hour → 25°C/3 hours

Total cycle 10 cycles

Drop Test

Standard Packaging from 1.2m

Drop on hardwood or a board of 5cm thick, three sides, six plain.

Vibration Test

Vibration 1000 cycles/min.

Amplitude 1.5mm

Duration 1 hour in each 3 axes

Note

Please make sure that any foreign materials (e.g. magnetic powder, washing solvent, flux, corrosive gas) do not enter this product in your production processes. Contamination may result in a loss of some or all audio output.



soberton inc.

ELECTRO
MAGNETIC
BUZZER

Acoustic Product Specification

Product Number: ST-03BHT



Release | Revision: A/2022

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1
Specifications

Dimensions

Page 2
Reliability Test

Page 3
Electrical And Acoustical
Measuring Condition

Typical Frequency Response
Curve


Page 4
Surface Mounting Condition

Page 5
Packing


Electrical And Acoustical Measuring Condition

Recommended Driving Circuit

Resonant frequency, 50% duty cycle, square wave.
Signal amplitude should be large enough to saturate the transistor.

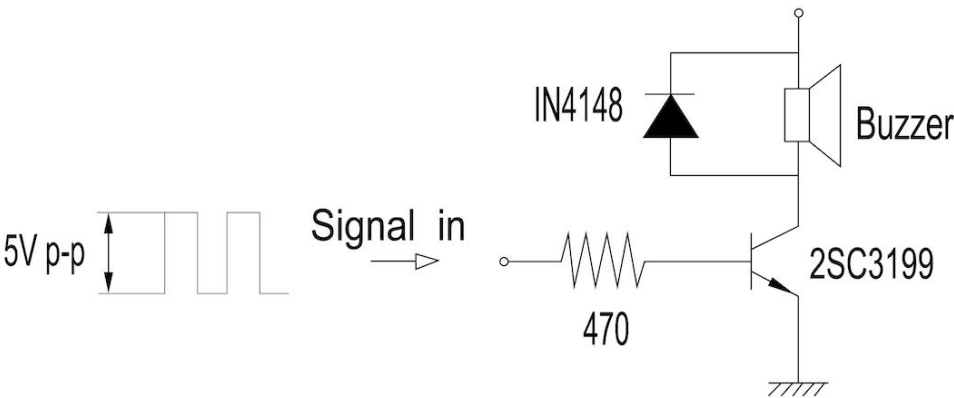


Recommended Setting

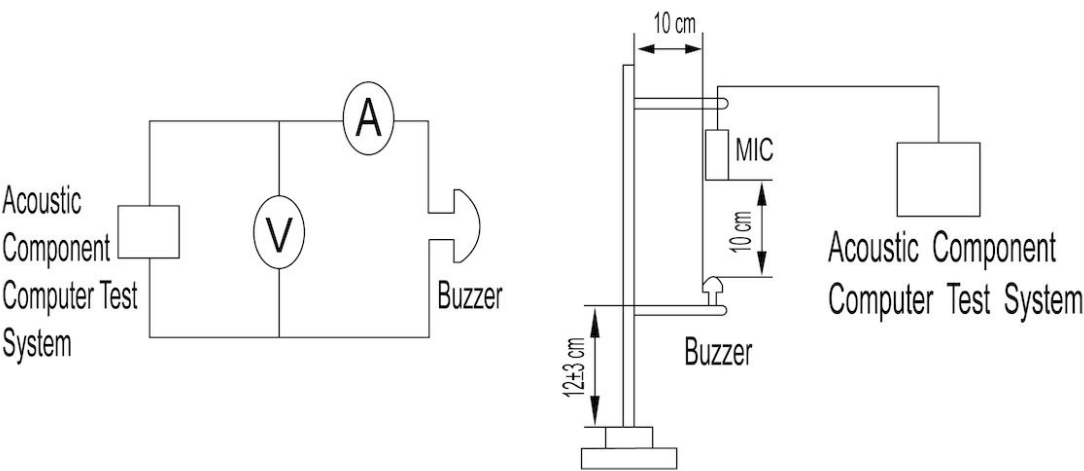

Typical Frequency Response Curve

3.6Vo-p, 50% duty cycle, square wave, 10cm

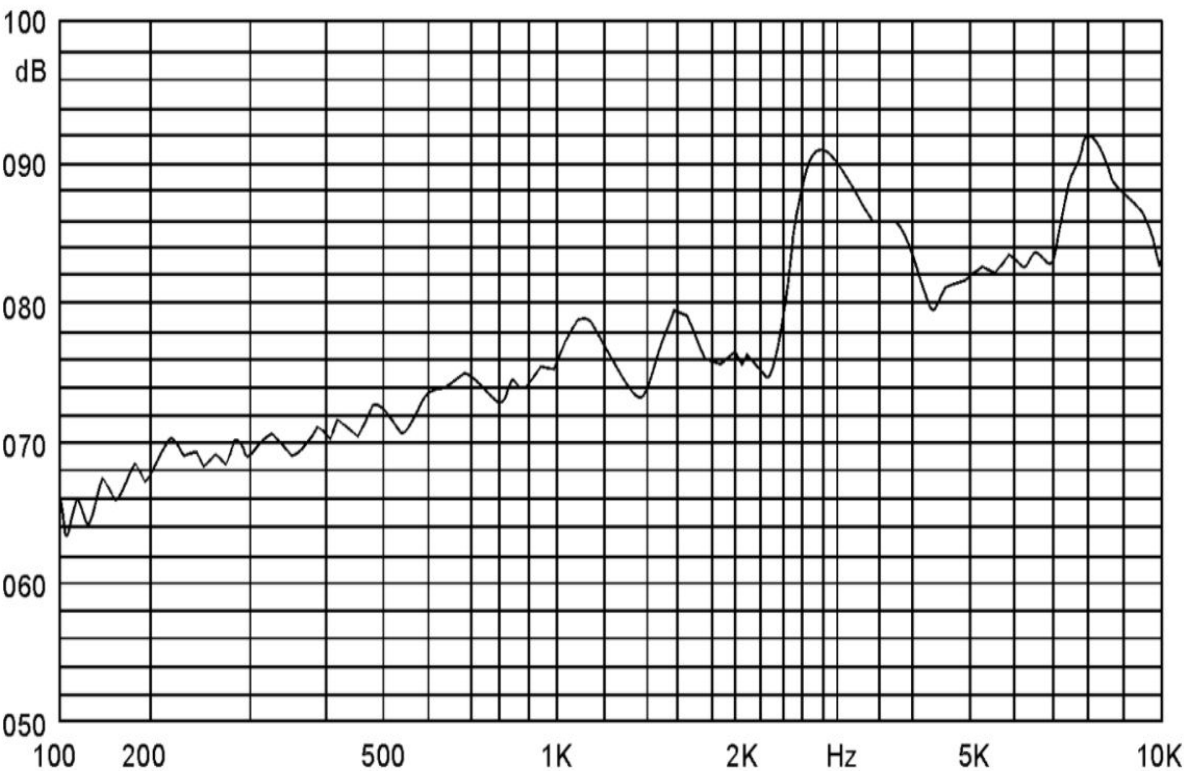



soberton inc.

ELECTRO
MAGNETIC
BUZZER

Acoustic Product Specification

Product Number: ST-03BHT



Release | Revision: A/2022

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1
Specifications

Dimensions

Page 2
Reliability Test

Page 3
Electrical And Acoustical
Measuring Condition


Typical Frequency Response
Curve

Page 4
Surface Mounting Condition

Page 5
Packing

Surface Mounting Condition

Reflow Soldering
Recommended reflow soldering condition is as follows.

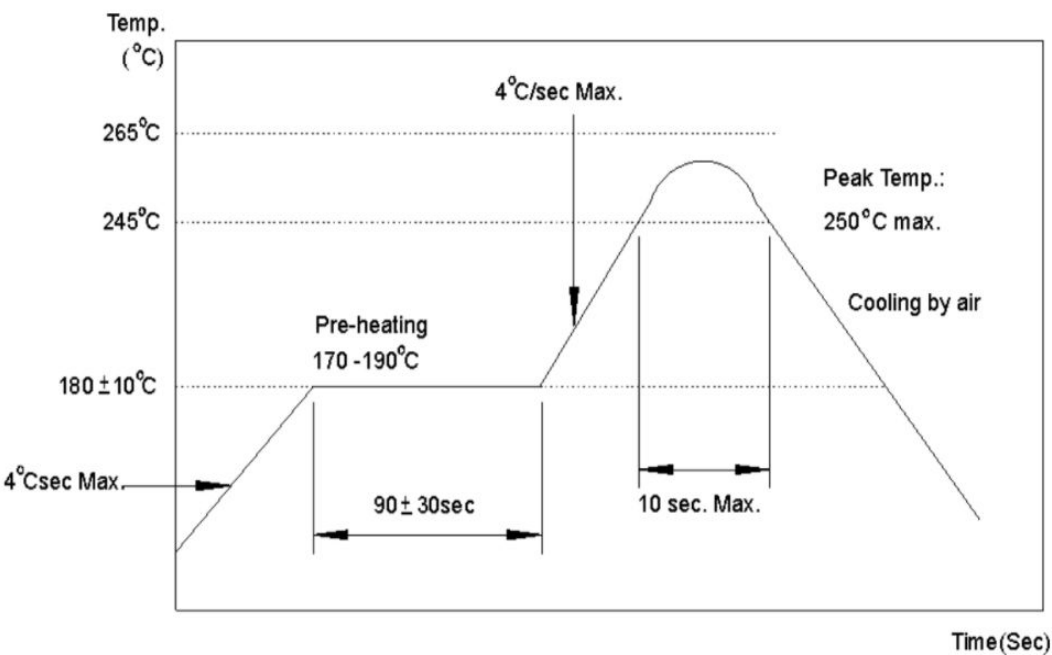

- Note:
1. In automated mounting of the SMD sound transducers on PCB, any bending, expanding or pulling forces, or shocks against the SMD sound transducers should be kept to a minimum to prevent electrical failures and mechanical damage to the devices.
 2. In the reflow soldering, soldering temperatures that are above specification and extreme gradients such as rapid heating or cooling may cause electrical failures and mechanical damage to the devices.



soberton inc.

ELECTRO
MAGNETIC
BUZZER

Acoustic Product Specification

Product Number: ST-03BHT



Release | Revision: A/2022

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1
Specifications

Dimensions

Page 2
Reliability Test




Page 3
Electrical And Acoustical
Measuring Condition

Typical Frequency Response
Curve

Page 4
Surface Mounting Condition

Page 5
Packing

Packing

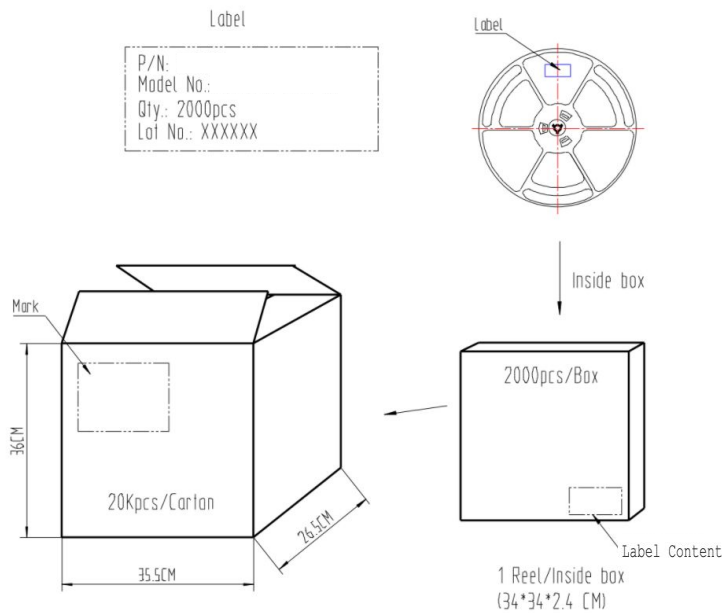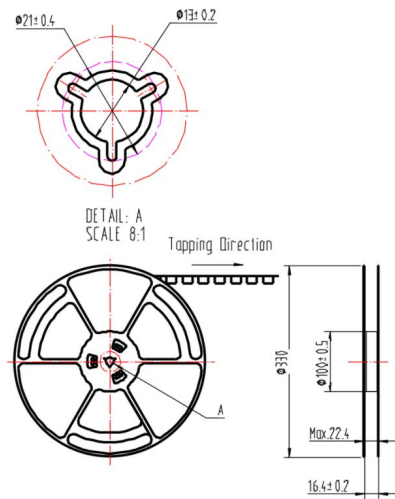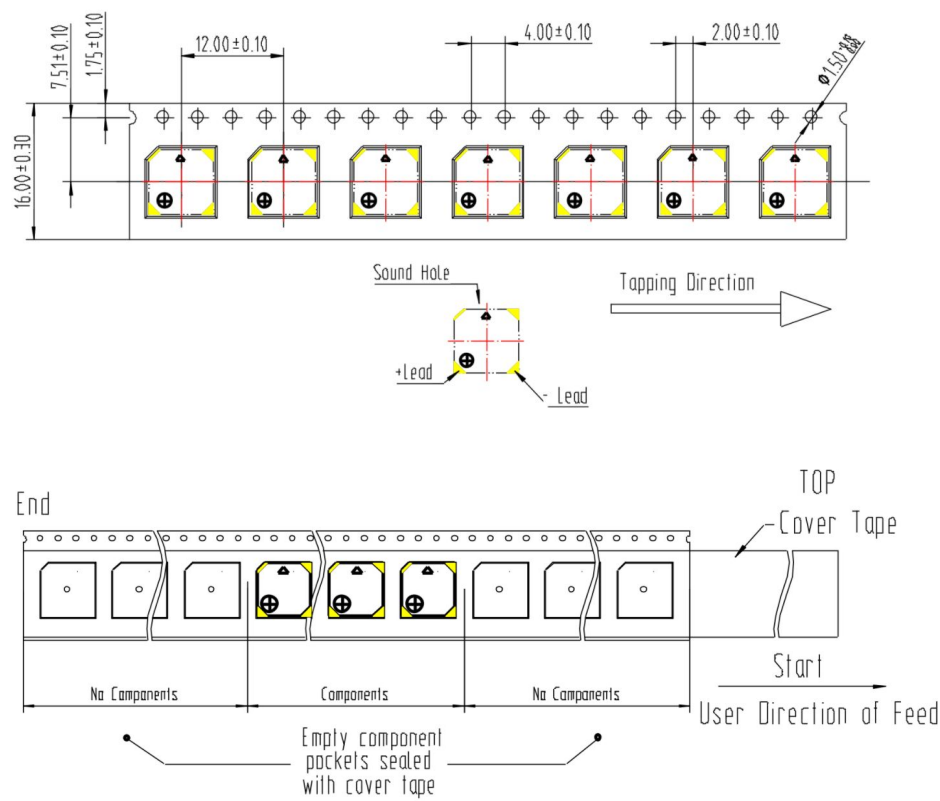

- Packing Order:**
1. Per Reel: 2,000pcs
 2. Per Carton: 10 Reels
 3. Per Carton: 20,000pcs
 4. Carton Size: 35.5x26.5x36cm