


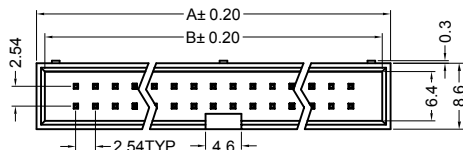


Straight Type

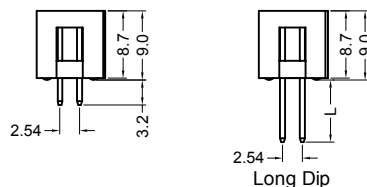


P.C.B Layout


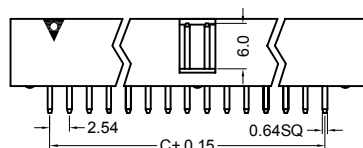


Long Dip

Right Angle Type

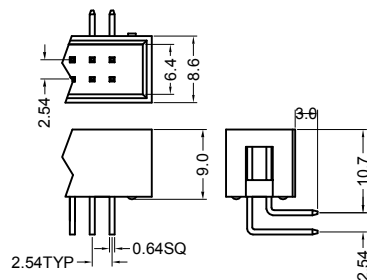

Surface Mount Type



P.C.B Layout

材质 Material:

绝缘体 Insulator: Glass filled PBT UL94V-0

接触件 Contacts: Brass

电镀层 Plating: Whole Gold plated over Nickel

电气性能 Electrical Characteristics:

接触电阻 Contact Resistance: 30mΩmax. at DC 100mA

绝缘电阻 Insulator Resistance: 1000MΩmin. at 500V DC

耐压 Withstanding Voltage: 1000V AC/rms 50Hz For 1 minute

工作电流 Current Rating: 2 AMP

使用温度范围 Operating Temperature: -40℃~+105℃

Dimension

position	A	B	C
06	15.24	13.04	5.08
08	17.78	15.58	7.62
10	20.32	18.12	10.16
14	25.40	23.20	15.24
16	27.94	25.74	17.78
20	33.02	30.82	22.86
24	38.10	35.90	27.94

position	A	B	C
26	40.64	38.44	30.48
30	45.72	43.52	35.56
34	50.80	48.60	40.64
40	58.42	56.22	48.26
50	71.12	68.92	60.96
60	83.82	81.62	73.66
64	88.90	86.70	78.74

				TITLE	BOX HEADER 2.54mm (0.100")	GENERAL TOLERANCE	DRAWN BY	DATE	DENK DENG KE CONNECTOR ELECTRONICS CO., LTD 登科电子有限公司			
					DC3簡易牛角插針	x, l ±0.3 x, x' ±0.2 x, xx' ±0.1	CHECKED BY	DATE				
				SERIES	DK301-XX-X-X-X	ANGLE TOLERANCE	APPROVED BY	DATE				
				CUSTOMER P/N		x, l ±2° x, x' ±1° x, xx' ±0.5°			DRAWING NO.		SHEET	1 OF 1
SCALE	DESCRIPTION	CHK	DATE	SCALE	1:1	PROJECTION			SHEET SIZE	A4	REV.	A0
1	2	3		4	5		6	7		8		