


環保物料專用

RoHS compliant

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1、Important Dim.: (A)
- 2、Crimping PullOut Force:1.10Kgf Min.
- 3、Electrical Character:100% Open/Short
- 4、The red and blue wires are crossed

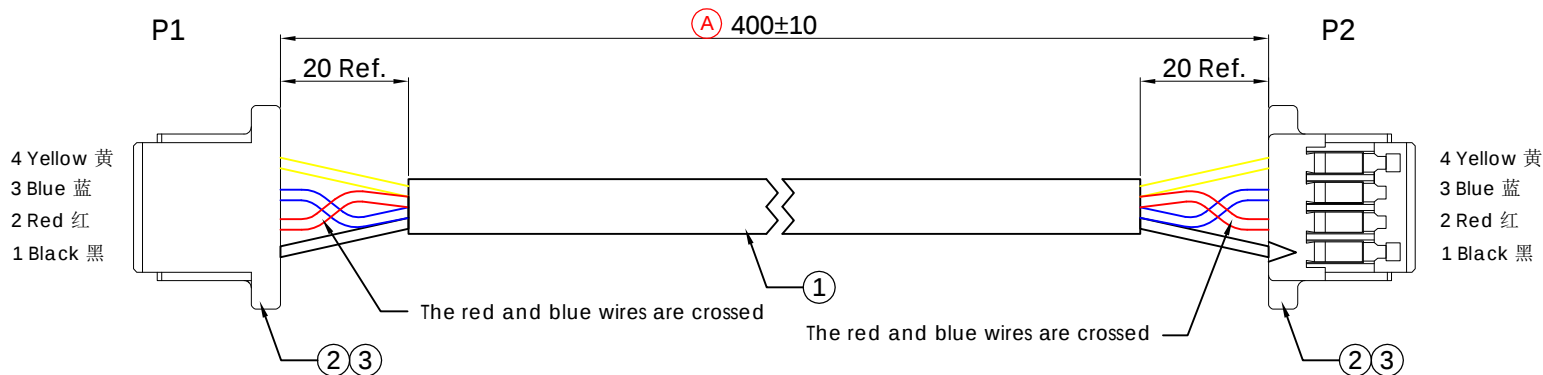

Bill Of Material

3	KWQS230	TER.	PH1.0 Phosphor Bronze, Tin Plating	PCS	8
2	KWQS230	CONN.	1.0 mm SH Housing 4P Black	PCS	2
1	KWQS248	Cable	28AWGX4C FLAT WIRE Black	mm	
No.	Vendor	NAME	Material Name and Name	Unit	

Wire Diagram		
CONN P1	CONN P2	COLOR
1	1	Black 黑
2	2	Red 红
3	3	Blue 蓝
4	4	Yellow 黄



DESCRIPTION(内容):

1.0PITCH HOUSING WIRE HARNESS

DRAWN(製圖):

Tom Liu

CHECKED(確認):

Jack Wu

APPROVAL(核准):

Kane He

GENERAL TOLERANCE

LINEAR

X.: ±0.30

X.X: ±0.20

X.XX: ±0.15

X.XXX: ±0.10

ANGLES

X°: ±5.0°

X.X°: ±3.0°

X.XX°: ±2.0°

X.XXX°: ±1.0°

REV:

A/2

UNIT:

mm

SHEET:

1/1

REV

1

2

3

4

DESCRIPTION

ORIGINAL

Change Wire sequence Flat Cable


DATE

Jan-08-2022

Jan-17-2022

A4

SCALE(比例):
1:XX



THIRD ANGLE PROJECTION

PART NO:

(料號)

CBH-C16999-001

DWG NO(圖號):

KWRD220108-021